

In Jami Shah, Martti Mantyla, and Dana Nau, editors, *Advances in Feature Based Manufacturing*, Elsevier/North Holland, 1994, pp. 161-184.

A methodology for systematic generation and evaluation of alternative operation plans*

Satyandra K. Gupta,^a Dana S. Nau,^b William C. Regli,^b and Guangming Zhang^a

^aMechanical Engineering Department and Institute for Systems Research, University of Maryland, College Park, MD 20742, USA

^bComputer Science Department and Institute for Systems Research, University of Maryland, College Park, MD 20742, USA

Abstract

This chapter describes a methodology for analyzing some of the manufacturability aspects of machined parts during the design stage of the product development cycle, so that problems related to machining can be recognized and corrected while the product is being designed. Starting with the CAD design for a proposed part, our basic approach is to systematically generate alternative operation plans for machining the part, evaluating the capabilities of each operation plan to see which one best balances the need for efficient manufacturing against the need for a quality product. We anticipate that the information provided by this analysis will be useful both to provide information to the manufacturing engineer about alternative ways in which the part might be machined, and also to give feedback to the designer about problems that might arise with the machining.

1. INTRODUCTION

One of the missing links between CAD and CAM is the virtual absence of any systematic methodology for generating and evaluating the alternative ways to manufacture a proposed design. Most integrated CAD/CAM systems try to generate a single process plan for a given design—but in general, there may be several alternative ways to manufacture the design. How easy it is to manufacture—or whether it is even possible to manufacture it at all—may depend on which alternative is chosen. Thus, these alternatives should be generated and examined, to determine how well each one balances the need for a quality product against the need for efficient manufacturing.

In this chapter we describe a methodology for systematically generating and evaluating alternative operation plans for machined parts. Our approach involves representing

*This work was supported in part by NSF Grants NSFD CDR-88003012, IRI-8907890, and DDM-9201779.

the design as a collection of *machining features*, volumetric features that correspond to machining operations. In general, there may be several alternative representations of the design as different collections of machinable features, corresponding to different ways to machine the part. The basic idea is to generate alternative interpretations of the part as collections of machinable features, map these interpretations into operation plans, and evaluate the manufacturability of each operation plan. More specifically, our approach involves the following steps:

1. Build the set of all potential machining features \mathcal{F} by identifying various features which can be used to create the part P from the stock S , as described in Section 4. Each feature in \mathcal{F} represents a different possible machining operation which can be used to create various surfaces of the part.
2. Do the following steps repeatedly, until every promising feature-based model (FBM) for P has been examined:
 - (a) Generate a promising FBM F from the feature set \mathcal{F} , as described in Section 5. As described in Section 3, an FBM is basically a set of machining features that contains no redundant features and is sufficient to create the part P . We consider an FBM unpromising if it is not expected to result in any operation plans better than the ones which has already been examined.
 - (b) Do the following steps repeatedly, until every promising operation plan resulting from F has been examined:
 - i. Generate a promising operation plan O from F , as described in Section 6. O represents a partially ordered set of machining operations. We consider an operation plan to be unpromising if it violates any common machining practices.
 - ii. Estimate the achievable machining accuracy of the operation plan O , as described in Section 7.1. If the operation plan O cannot produce the required design tolerances and surface finishes, then discard it and go to Step i.
 - iii. Estimate the production time and cost associated with operation plan O , as described in Section 7.2.
3. If no promising operation plans were found during the above steps, then exit with failure. Otherwise exit with success, returning the operation plan that represents the best tradeoff among quality, cost, and time, as described in Section 7.3.

The results of such an analysis can potentially be used for two purposes: (1) to give the production engineer information about what processes and process parameters are most desirable over the various ways in which the part might be machined; and (2) to give the product designer a better understanding of whether and how the design might be changed to improve its manufacturability.

2. RELATED WORK

Feature-based approaches have been very popular in a variety of CAD/CAM implementations, but different people have used the term to mean different things [27, 9, 14, 6]. Significant amounts of work have been directed towards defining sets of form features to serve as a communication medium between design and manufacturing—but at present, most researchers are convinced that a single set of features cannot satisfy the requirements of both of these domains. The recent trend seems to be toward defining sets of features with specific application domains in mind (such as machining, assembly, inspection, etc.). For the machining domain, most researchers agree that volumetric features are preferable to surface features, although certain additional information about the surfaces is needed (for example, to determine accessibility and tool approach directions).

2.1 Recognizing Machining Features

There are three primary approaches for obtaining features from a CAD model. In *human-supervised feature recognition*, a human user examines an existing CAD model to determine what the manufacturing features are [1]. In *automatic feature recognition*, the same feature recognition task is performed by a computer system [4, 29, 25, 5, 11, 23]. In *design by features*, the designer specifies the initial CAD model in terms of various form features which translate directly into the relevant manufacturing features [26, 28, 10]. Many examples exist of each of these approaches. However, these approaches typically produce a single set of features describing the CAD model, rather than several alternative interpretations of the model.

2.2 Generating Alternatives

Hummel [9] and Mantyla [16] present examples of multiple feature representations of the same object. However, these papers do not describe a system or methodology for generating multiple feature models.

Hayes's MACHINIST system [8] can identify certain cases in which one feature needs to be made before another. However, its representation of features is not adequate for all aspects of process planning. For example, if it decides that some hole needs to be made before some slot, it does not automatically update the dimensions of the hole or the slot—information which would be needed for process selection.

The AMPS process planning system [2] includes a step called "feature refinement," which involves combining a set of features into a more complex feature if it appears that this will optimize the plan, or splitting a feature that cannot be machined into two or more features that can (hopefully) be machined. The techniques for deciding when to combine or split features are heuristic in nature, so from the author's description it is not always clear when alternative interpretations will be produced.

Vandenbrande [29] has developed a system that combines techniques from artificial intelligence and solid modeling. It uses hints or clues to identify potential features in the boundary representation of the part. It is capable of identifying interacting features (e.g., two intersecting slots), and produces alternative feature interpretations in certain cases.

The first systematic work on generation of alternative interpretations was done by Karinthi and Nau [12, 13]. They describe an approach for producing alternative inter-

pretations of the same object as different collections of machining features as the result of algebraic operations on the features, and a system for generating alternative interpretations by performing these algebraic operations. This system works with abstract volumetric features. There is no direct relation between these features and machining operations. Therefore some of the interpretations generated by this approach are not feasible from the machining point of view. In this approach a set of algebraic operators (such as maximal extension, truncation etc.) has been used to generate new interpretations of the part. But this set of operators is not sufficient to generate all interpretations of the part. Moreover, many times the resulting features do not belong to any of the feature classes. Some of the feature interactions may also result in partial ordering among features, which is an important issue from a machining point of view—but this work does not deal with time orderings among the features.

2.3 Evaluating Operation Plans

Because of the need for quality assurance on the shop floor, extensive research has been done on different aspects of evaluation of operation plans. Much of the data relevant for machining operation planning is available in machining data handbooks such as [15]. In addition, mechanistic models have been developed to provide quantitative mappings between machining parameters (such as cutting speed, feed, and depth of cut), to the performance measures of interest (such as surface finish and dimensional accuracy) [7, 2, 35, 36, 30]. Research on machining economics has produced quantitative models for evaluating times and costs related to machining operations [37, 32, 31], and optimization techniques have been applied to these quantitative models to seek the machining parameters which minimize the variable cost, or maximize the production rate and profit rate associated with machining operations.

3. DEFINITIONS

3.1 Geometric Solids and Machined Parts

For our purposes, a *solid* is any regular, semi-analytic subset of three-dimensional Euclidean space. If R is any solid, then $b(R)$ is the *boundary* of R , and $\iota(R)$ is the *interior* of R . Note that $R = \iota(R) \cup b(R)$ and that $\iota(R) \cap b(R) = \emptyset$. If R and R' are solids, then $R \cap^* R'$ is the *regularized intersection* of R and R' , i.e., the closure of $\iota(R) \cap \iota(R')$. Similarly, $R \cup^* R'$ and $R -^* R'$ are the *regularized union* and *regularized difference*, respectively. For further details on these and other related concepts, see [24].

A *machined part* (or just a *part*) is the finished component P to be produced as a result of a sequence of machining operations on a piece of *stock* S , which is the raw material from which the part is to be machined. The *delta volume* is the volume to be machined, i.e., $\Delta = S -^* P$. The *workpiece* is the intermediate part W produced by performing one or more of the machining operations in the sequence. We will represent P , S , and W as geometric solids.

3.2 Machining Features

In a machining operation, material is removed by relative motion between the cutting tool and the workpiece. The cutting tool is mounted on a large machine tool, and the

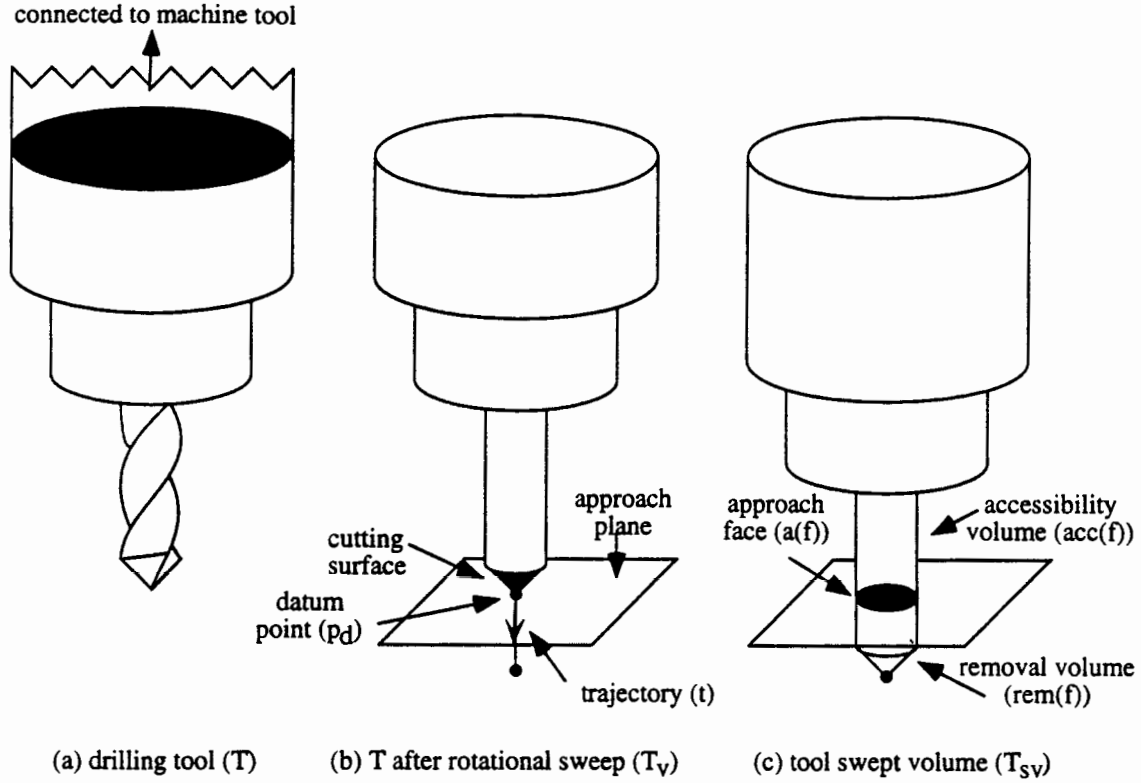


Figure 1: A drilling tool, and the resulting swept volume.

total volume occupied by the cutting tool and the machine tool is quite large. But we will only be interested in some small portion of this total volume, namely the portion that actually gets close to the workpiece. We will call this portion the *tool volume*, and we will denote it by T . Fig. 1(a) shows a drilling tool. To perform a cutting operation, the tool volume T is given a relative cutting motion with respect to the workpiece. This cutting motion may either be imparted to the tool (examples include various milling operations) or the workpiece (examples include various lathe operations). Most of the time this relative cutting motion is either linear (operations such as shaping, planing, broaching) or rotational (operations such as turning, drilling, boring, milling). We represent this motion as a sweep s_v which is either linear or rotational. Let T_v denote the solid generated by applying sweep s_v to the solid T . For the purpose of locating the tool, we choose a particular point p_d of T_v as a *datum point*. Fig. 1(b) shows T_v and p_d for drilling operations.

For our purposes, a *machining feature* is the portion of the workpiece affected by a machining operation. However, we will need to know not just the volume of material which the feature can remove from the workpiece, but also what kind of machining operation we are performing, and how we access the workpiece in order to perform the operation. More formally, a machining feature is a triple $f = (\text{rem}(f), \text{acc}(f), \text{class}(f))$, where $\text{rem}(f)$, $\text{acc}(f)$, and $\text{class}(f)$ are as defined below:

- To perform the machining operation, one sweeps the volume T_v along some trajectory t . The trajectory t is *feasible* only if sweeping T_v along t does not cause

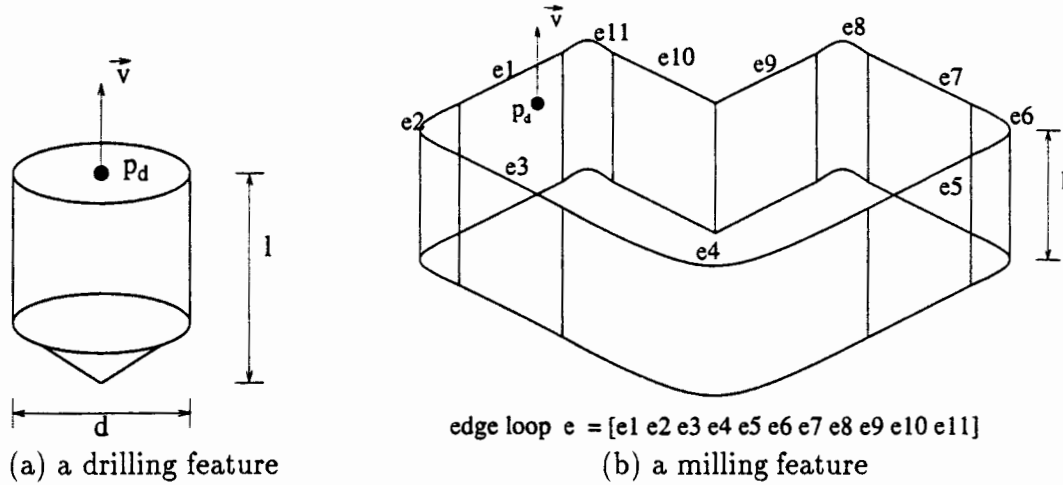


Figure 2: Examples of machining features

interference problems between the non-cutting surface of T_v and the workpiece. Fig. 1(b) shows an example of a feasible tool trajectory for drilling. If t is feasible, then the solid created by sweeping T_v is $T_{sv} = \{(p - p_d) + q : p \in T \text{ and } q \in t\}$, as shown in Fig. 1(c). However, only a portion of T_{sv} actually corresponds to the volume that can be removed by the machining feature.

Let the *approach surface* π be a surface touching solid T_v and containing T_v to one of its sides. This surface is either a plane or a cylinder depending upon the machining operation. For drilling operations this surface is planar as shown in Fig. 1(b). The side containing T_v is called *accessibility side*. The other side is called *removal side*. The *approach face* of f is defined as $a(f) = \pi \cap T_{sv}$. The *removal volume* of f is the solid $\text{rem}(f)$ consisting of all points in T_{sv} that are on the removal side of π . The *effective removal volume* of f is the intersection between $\text{rem}(f)$ and the delta volume; i.e., it is the solid $\text{rem}(f) \cap \Delta$.

- The *accessibility volume* for f is the solid $\text{acc}(f)$ consisting of all points in T_{sv} that are on the accessibility side of π .
- The feature f will be an *instance* of some *feature class* ϕ . The feature class ϕ is a parameterized set of machining features corresponding to some machining operation o , and it is characterized by the shape and trajectory of the cutting tool used to perform the operation o . If f is a feature in ϕ , then the *class* of f is $\text{class}(f) = \phi$, and the machining operation for f is $\text{op}(f) = o$.¹ If f is an instance of ϕ , then the f 's *parameters* in ϕ are the specific set of parameter values for ϕ that yield f . Below are two examples:

¹In order to create a feature, sometimes we will need several machining operations: a *roughing* operation followed by one or more *finishing* operations. In this chapter, we do not handle such cases; instead, we assume that each feature f can be made using a single machining operation $\text{op}(f)$. This restriction significantly limits the scope of the current work, but we intend to remove this restriction in our future work. We believe that it will be relatively straightforward to do so, by using techniques similar to those we employed in our previous work on process selection for roughing and finishing operations [17].

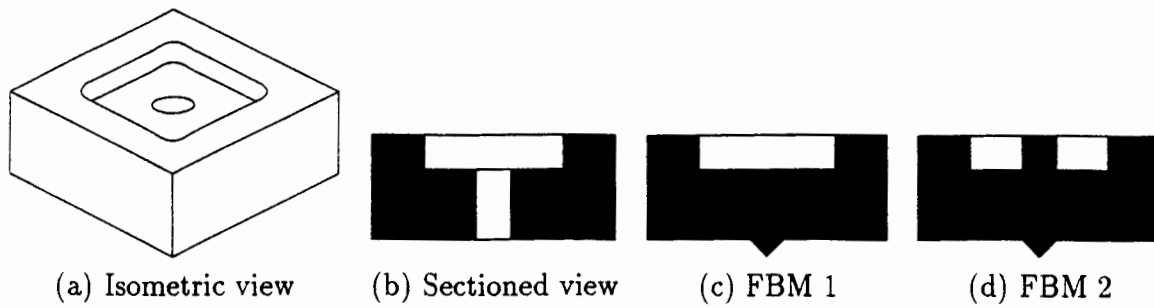


Figure 3: A simple part, and two FBMs for it. Note that in FBM 1, the pocket must be made before the hole, and in FBM 2, the hole must be made before the pocket.

- If we are interested in drilling holes, then we may define ϕ_d to be the set of all features that can be created by sweeping a drilling tool of diameter d along a linear trajectory starting at the datum point p_d and going in along some unit vector \vec{v} for some distance l . Thus, we can specify a particular feature in ϕ_d by giving specific values for p_d , \vec{v} , d , and l .
- If we are interested in making milled pockets, slots or faces, then we may define ϕ_m to be the set of all features that can be created by sweeping a milling tool of radius r in plane, whose parameters are the starting point p_d , the depth l , the edge loop e , and the unit orientation vector \vec{v} . Thus, we can specify a particular feature in ϕ_m by giving specific values for p_d , \vec{v} , e , and l .

Fig. 2 gives some examples of machining features.

A feature f is *accessible* in a workpiece W if the following conditions are satisfied:

1. f 's accessibility volume does not intersect the workpiece, i.e., $\text{acc}(f) \cap^* W = \emptyset$.
2. If f 's class is drilling, then to ensure proper machining, the hole's entry face should be a planar surface perpendicular to the hole's axis (no similar condition is needed for milling).

3.3 Feature-Based Models

Depending upon available manufacturing facilities, we will have some fixed finite set of feature classes $\Phi = \{\phi_1, \dots, \phi_n\}$, and for each part that we want to manufacture, we will be interested in describing the part in terms of features from Φ . Suppose we are given a part P and stock S . A *feature-based model* (or FBM) of P and S is any set of features F having the following properties:

1. Each $f \in F$ is an instance of some feature class in Φ .
2. If we subtract the features in F from S , we get P ; i.e., $S -^* \bigcup_{f \in F} \text{rem}(f) = P$.
3. No feature in F is redundant, i.e., for every feature $f \in F$, $S -^* \bigcup_{g \in F - \{f\}} \text{rem}(g) \neq P$.

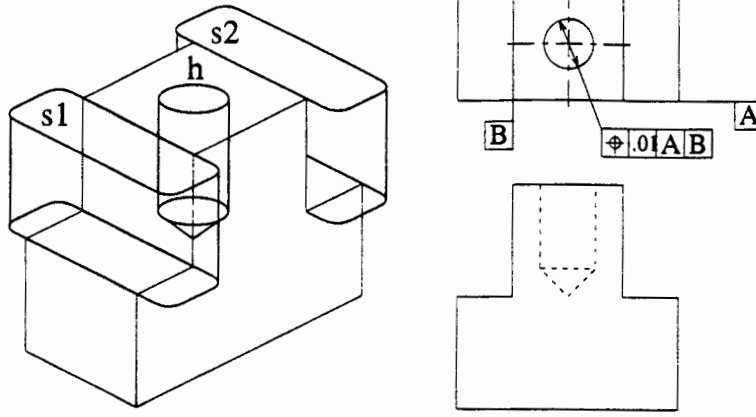


Figure 4: An example of a datum-dependency precedence constraint. In this case, $s1$ should be made before h .

For example, Fig. 3 shows a simple part and two FBM for it. Intuitively, an FBM is an interpretation of the delta volume as a set of machining features.

Let f and f' be any two distinct features in some FBM. Then f and f' intersect each other if $\text{rem}(f) \cap^* \text{rem}(f') \neq \emptyset$.

3.4 Precedence Constraints and Operation Plans

Due to accessibility [18], setup [8] and other types of interactions [20] among the features in an FBM F , the features of F cannot be machined in any arbitrary order. Instead, these interactions will introduce *precedence constraints* requiring that some features of F be machined before or after other features.

Let F be an FBM, and let f and f' be any two features in F . We will be interested in the following two types of precedence constraints among f and f' :

1. *Accessibility precedence constraint.* If $\text{acc}(f) \cap^* \text{rem}(f') \neq \emptyset$, then this means that the cutting tool approaches f through the volume occupied by f' , and thus f' must be machined before f . An example is shown in Fig. 3(c), in which the pocket must be machined before the hole.
2. *Minimality precedence constraint.* Suppose that machining f' before f would allow us to machine $\text{rem}(f)$ using a smaller feature g of the same class as f , then we constrain f to be machined before f' (for otherwise, we would be machining g rather than f). An example is shown in Fig. 3(d), in which we would constrain the hole to be machined before the pocket.
3. *Datum-dependency precedence constraint.* If feature f creates the datum surface for feature g , then f should be machined before g . An example is shown in Fig. 4.

If the precedence constraints contradict each other (i.e., if there is no total ordering consistent with them), then we consider F to be unmachinable. Otherwise, the precedence constraints will induce a partial order \prec on the features of F (i.e., $f \prec f'$ if f must be machined before f')—or equivalently, they will induce a partial order on the machining

Table 1
Surfaces created by drilling and milling

	Bottom	Side
drilling	conical (concave)	cylindrical (concave)
milling	planar	cylindrical or planar

operations corresponding to the features in F (i.e., $\text{op}(f) \prec \text{op}(f')$ iff $f \prec f'$). In this case, the *operation plan* for F consists of the set of machining operations O along with the partial ordering \prec . Note that every total ordering $\{o_1, o_2, \dots, o_k\}$ of O that is consistent with the operation plan will satisfy the following conditions:

For each i , let f_i be the feature corresponding to o_i . Let $W_0 = S$, and $W_i = W_{i-1} -^* \text{rem}(f_i)$ for all $i > 0$. Then

Condition 1: for all $i > 0$, f_i is accessible in W_{i-1} , i.e., $\text{acc}(f_i) \cap^* W_{i-1} = \emptyset$.

Condition 2: each f_i is the smallest feature in its class that can be used to produce W_i from W_{i-1} ; i.e., there is no feature $f \in \text{class}(f_i)$ such that $\text{rem}(f) \subset \text{rem}(f_i)$ and $W_{i-1} -^* \text{rem}(f_i) = W_{i-1} -^* \text{rem}(f)$.

4. IDENTIFYING MACHINING FEATURES

Given solids representing the part P and the stock S , and a set of feature classes Φ , we are interested in finding the set \mathcal{F} of all features from Φ that correspond to machining operations that can be used to create P . Each machining feature is capable of creating certain types of surfaces. For example, Table 1 presents the types of surfaces that can be created by drilling (shown in Fig. 2(a)) and milling (shown in Fig. 2(b)).

In our approach, we consider all the part surfaces that need to be created, and try to identify features (i.e., instances of feature classes) which are capable of creating those surfaces. The basic idea behind our approach is given below:

Let $U = b(P) -^* b(S)$ be the set of all faces of P that are not faces of S . These are the faces of P that will need to be machined. For each face $u \in U$, do the following:

For each feature class $\phi \in \Phi$, add to \mathcal{F} every feature $f \in \phi$ that has the following properties:

1. f can create u (i.e., u is a subface of some face of f), and f does not intersect the part (i.e., $P \cap^* \text{rem}(f) = \emptyset$),
2. for every feature $g \in \phi$ that has property 1 and contains f , f and g have the same effective removal volume.
3. for every feature $g \in \phi$ that has property 1 and is contained by f , g has a smaller effective removal volume.

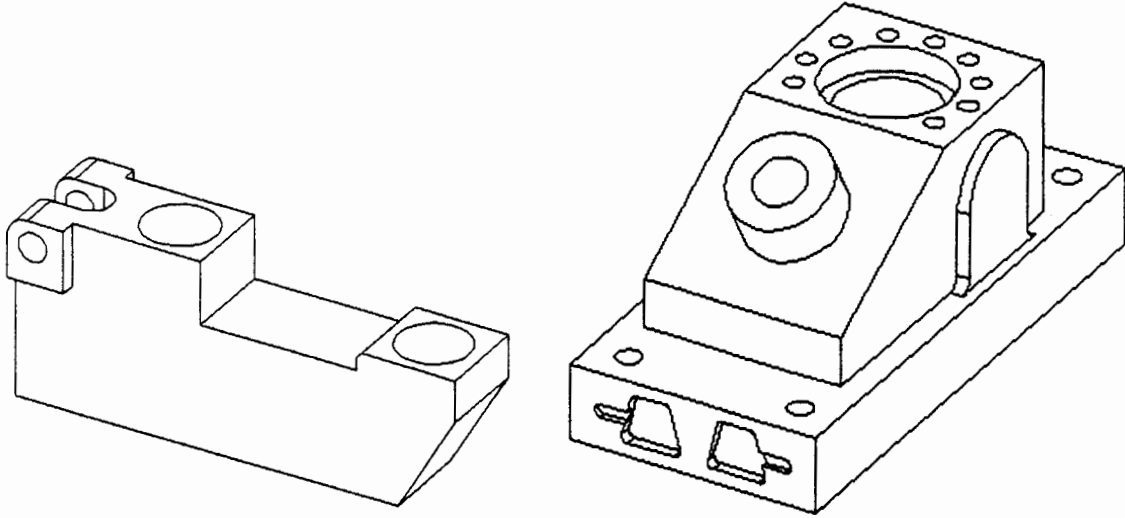


Figure 5: Examples of parts recognizable by our feature recognition algorithm.

As a specific instance of this approach, we have developed an algorithm for identifying machining features from a given portion of the boundary of the feature. For the details of the algorithm, readers are referred to [23, 22]. This algorithm handles a large variety of features that correspond to drilling and milling operations, and it is provably complete, even if the features intersect with each other in arbitrarily complex ways.

The primary limitation of this algorithm is that it is designed only to handle linearly swept features (i.e., holes, slots, pockets etc.). However, our definitions of drilling and milling features are more general than the definitions used in a number of feature recognition systems; for example, milled pockets may be complicated swept contours that include corner radii, islands and other characteristics, in order to realistically describe a non-trivial set of mechanical parts. For example, the algorithm can handle each of the objects shown in Fig. 5.

As an example, consider the part shown in Fig. 6. Let us assume that this part will be machined from a rectangular stock made of plain carbon steel (100 BHN), measuring 80mm \times 80mm \times 55mm. Suppose that the only available feature classes are the class of all drilling features and the class of all milling features. Then Fig. 7 shows the features identified by our algorithm.

5. GENERATING FEATURE-BASED MODELS

After finding the set of features \mathcal{F} , the next step is to use these features to generate FBMs for P and S . Since each FBM is basically an irredundant set cover for the set \mathcal{F} , we will generate irredundant FBMs using irredundant-set-covering techniques [21, 19], and use pruning heuristics to discard unpromising FBMs.

Discarding Unpromising FBMs. Let F be an FBM, and let $L_s(F)$ be the cardinality of the set $\{\vec{v}(f) : f \in F\}$, where $\vec{v}(f)$ is the unit orientation vector for feature f . Then

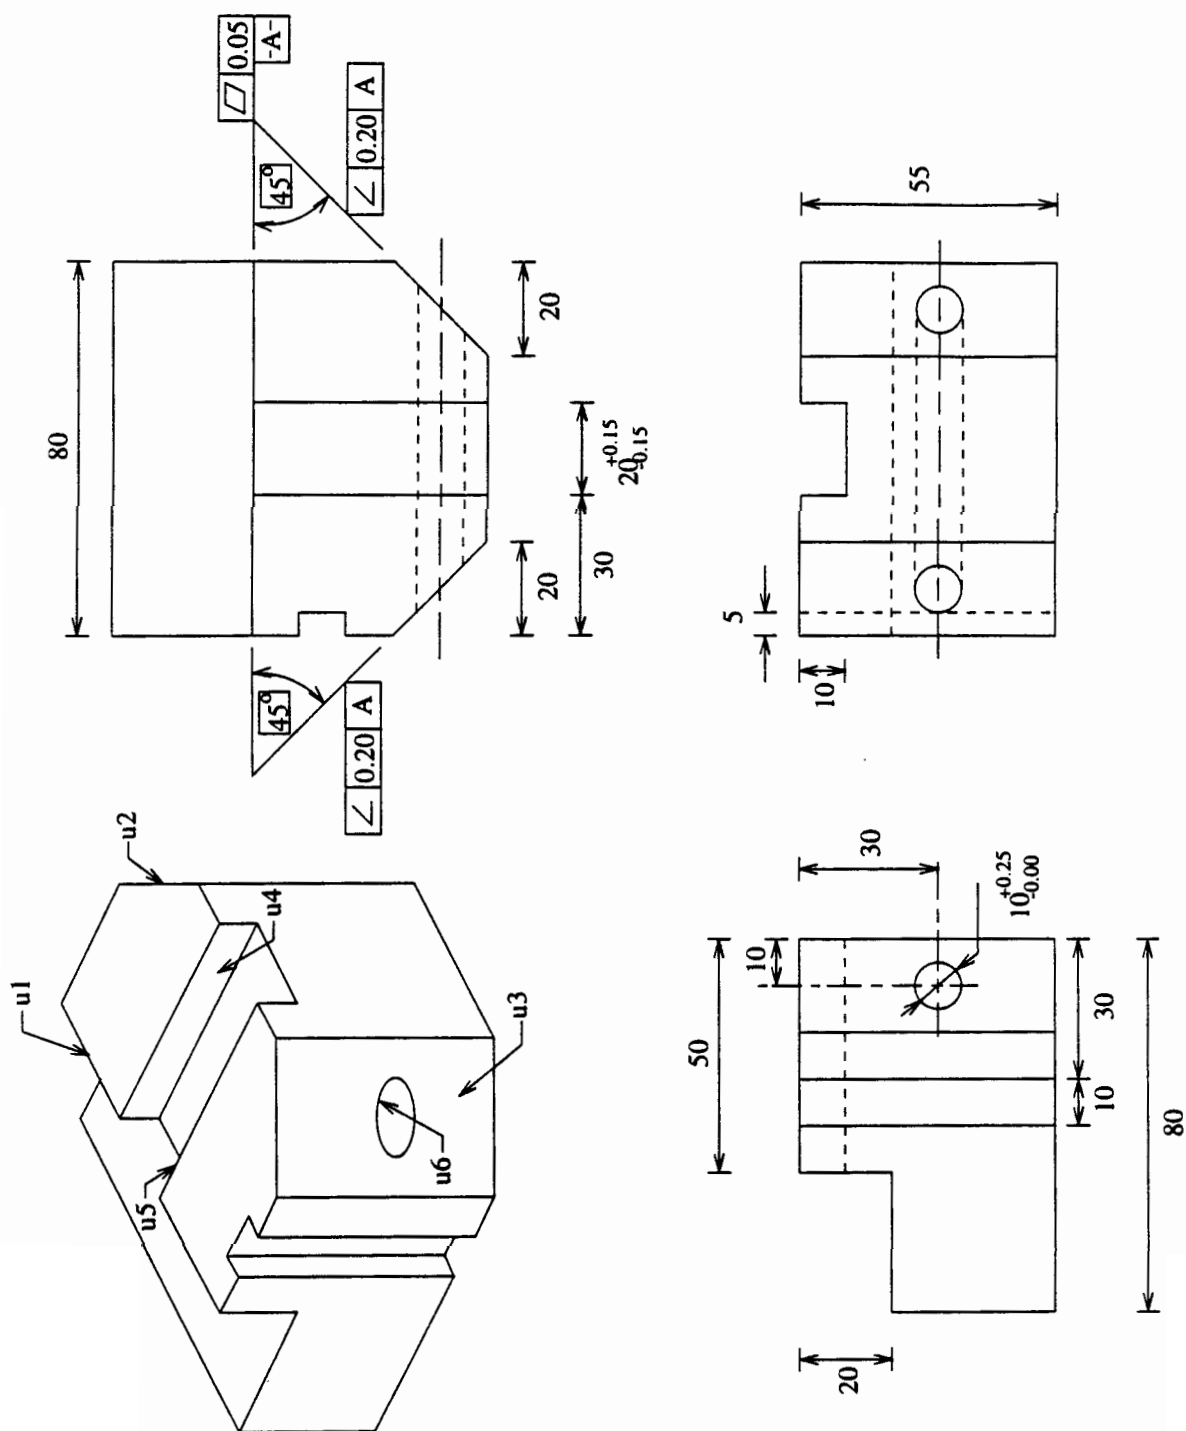


Figure 6: An example part.


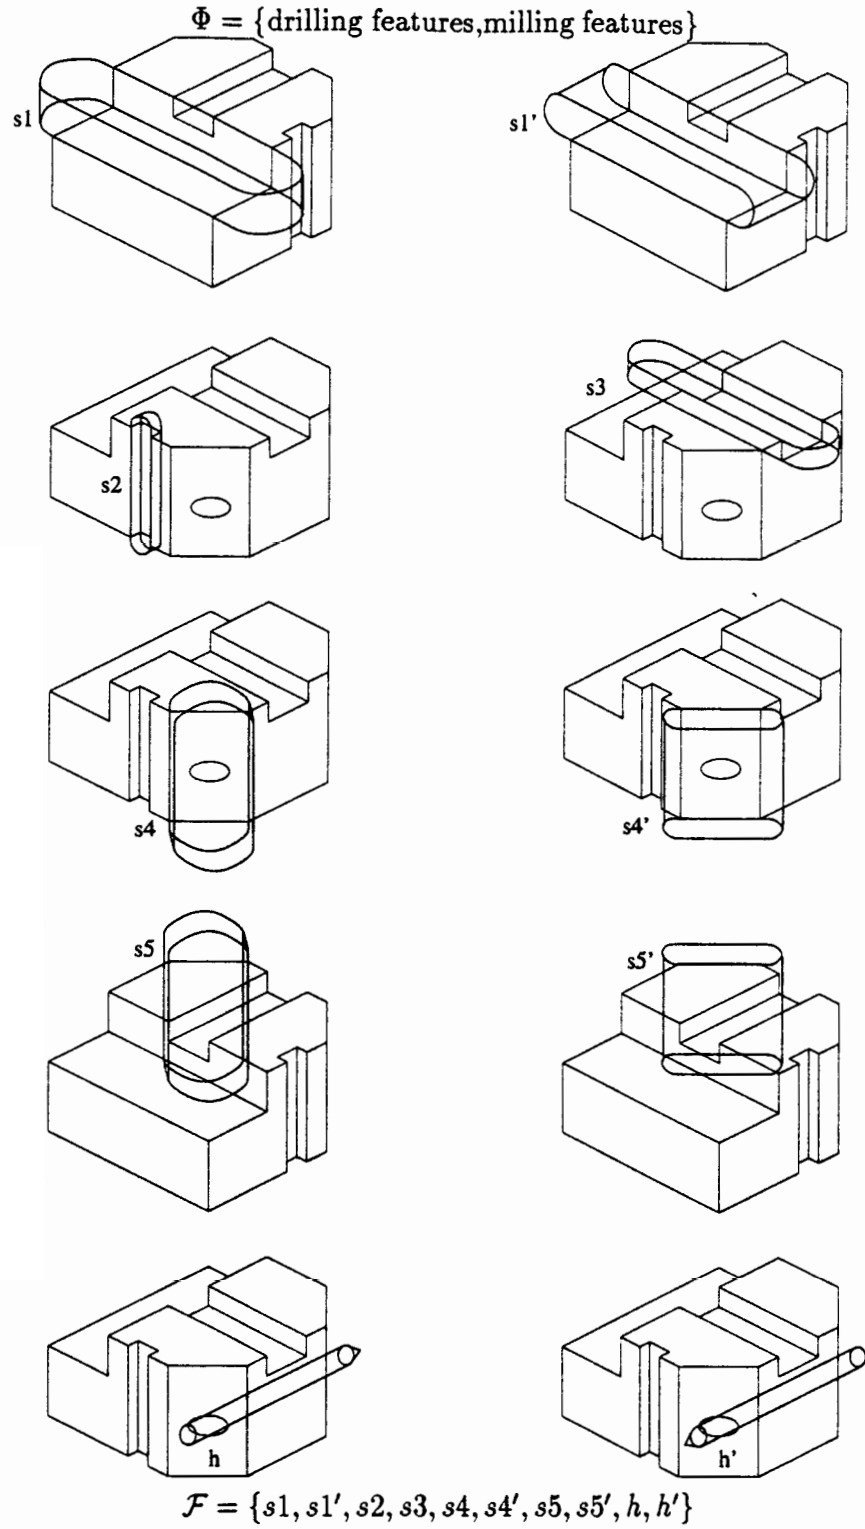


Figure 7: Features identified by our algorithm for the part shown in Fig. 6.

$$\text{FBM1} = \{h, s1, s2, s3, s4, s5\}:$$

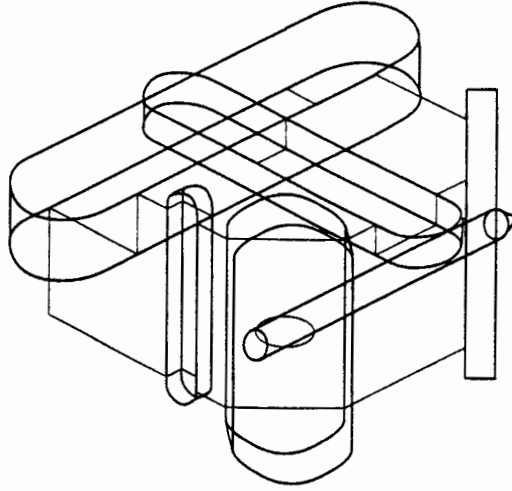

$$\text{FBM2} = \{h, s1, s2, s3, s4', s5'\}:$$

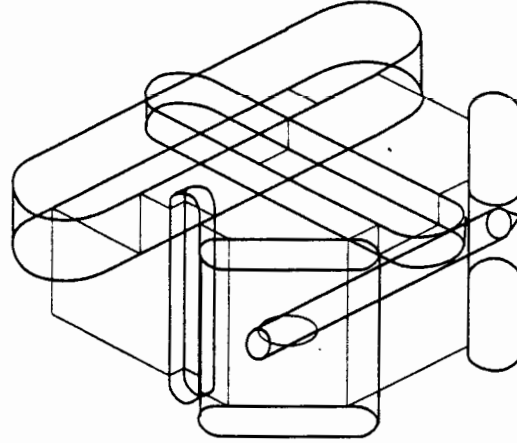


Figure 8: FBMs generated by our algorithm.

$L_s(F)$ is the number of different directions of approach needed in order to machine F , and (except on 5-axis machines or special purpose fixtures) is a lower bound on the number of setups needed to machine F . Similarly, let $L_{tc}(F)$ be the cardinality of the set $\{(tool(f), \vec{v}(f)) : f \in F\}$, where $tool(f)$ is the tool associated with feature f . Then $L_{tc}(F)$ is a lower bound on the number of tool changes needed in order to machine F .

If two FBMs F and F' have same sets of removal volumes but different sets of accessibility volumes, then the expected machining accuracy of F and F' is same, but the number of setups and/or tool changes might be different. In this case, we consider F' unpromising if either of the following conditions is satisfied:

- $L_s(F) \leq L_s(F')$ and $L_{tc}(F) < L_{tc}(F')$, i.e., F is believed to require no more setups than F' , and fewer tool changes;
- $L_{tc}(F) \leq L_{tc}(F')$ and $L_s(F) < L_s(F')$, i.e., F is believed to require no more tool changes than F' , and fewer setups.

As an example, Fig. 8 shows two of the FBMs generated from the features shown in Fig. 7.

6. GENERATING OPERATION PLANS

After generating FBMs, the next step is to generate the associated machining operations along with their partial orderings. Given an FBM F , we generate operation plans from F as follows:

1. $\mathcal{O} = \emptyset$. (\mathcal{O} will eventually be the set of operation plans returned in Step 3.)
2. For every partial ordering \prec on F that totally orders intersecting features and leaves non-intersecting features unordered,² do:
 - (a) Let f_1, \dots, f_n be any total ordering of F that is consistent with \prec .³ As described below, trim each f_i with respect to $W_i = S -^* (\text{rem}(f_1) \cup^* \dots \cup^* \text{rem}(f_{i-1}))$, producing a new trimmed feature g_i . If g_i is not accessible in W_i , then discard \prec and skip Steps (b) and (c). Otherwise, let G be the FBM consisting of g_1, \dots, g_n .
 - (b) Let \rightarrow be the partial ordering on G that is defined as follows:
 - i. $g \rightarrow g'$ for each pair of features $g, g' \in G$ such that g must be machined in order to make g' accessible (i.e., $\text{rem}(g) \cap^* \text{acc}(g') \neq \emptyset$);
 - ii. $g \rightarrow g'$ for each pair of features $g, g' \in G$ such that machining g' before g would allow us to machine $\text{rem}(g)$ using a smaller feature h of the same class as g (i.e., there is a feature $h \in \text{class}(g)$ such that $\text{rem}(h) \subset \text{rem}(g)$ and $S -^* (\text{rem}(g') \cup^* \text{rem}(h)) = S -^* (\text{rem}(g') \cup^* \text{rem}(g))$);
 - iii. $g \rightarrow g'$ for each pair of features $g, g' \in G$ such that g creates the datum surface for g' .
 - (c) If \rightarrow is a consistent partial ordering (which can easily be verified using a topological sorting procedure [3]), then (G, \rightarrow) is an operation plan, so add it to \mathcal{O} and select the associated cutting parameters. Otherwise, G is not machinable, so discard it.

3. Return \mathcal{O} .

If f is a feature and R is a solid, then trimming f with respect to R involves the following two steps:

²What we mean by this is the following. Let $\{(f_1, f'_1), (f_2, f'_2), \dots, (f_n, f'_n)\}$ be all pairs of intersecting features in F , and for each i , let C_i be the pair of partial ordering constraints $\{(f_i \prec f'_i), (f'_i \prec f_i)\}$. Then every consistent set of partial ordering constraints that can be found in the Cartesian product $C_1 \times \dots \times C_n$ gives us a possibility for the partial ordering \prec . In the worst case, this could be a very large number of partial orders—but we believe that this worst case is quite unlikely to occur. In most cases, all sets of intersecting features will be quite small, and thus the number of partial orders should not normally be very large.

³Such a total ordering can easily be generated using topological sorting [3]. This total ordering is not unique, but since \prec totally orders intersecting features, we can prove that we will get exactly the same operation plan regardless of which total ordering is produced by the topological sorting algorithm. The only purpose of this total ordering is so that we can trim the features; once we have trimmed them we discard the total ordering.

1. First, shorten f by eliminating (as much as possible) those portions of $\text{rem}(f)$ that are outside R and finding a new datum point p_d .
2. The removal volume $\text{rem}(f)$ is a swept volume produced by sweeping the cutting-tool volume T_v along a trajectory t that starts at the datum point p_d . If the trajectory t can be shortened without changing the datum point p_d or the volume removed from R by f , then trim f by shortening t .

As an example, consider FBM 1 of Fig. 8. If the hole h is machined before the face s_4 , then h 's entry face will not be perpendicular to its axis and will pose an accessibility problem (as described at the end of Section 3.2). Therefore, the above procedure will generate no operation plan in which $s_4 \prec h$. Fig. 9 shows two different operation plans produced from FBM 1.

Identifying Unpromising Operation Plans. We will consider O to be unpromising if it contains features whose dimensions and tolerances appear unreasonable. Examples include the following: a hole-drilling operation having too large a length-to-diameter ratio; a recess-boring operation having too large a ratio of outer diameter to inner diameter; two concentric hole-drilling operations with tight concentricity tolerance and opposite approach directions. All three of these examples are illustrated in Fig. 10.

7. OPERATION PLAN EVALUATION

7.1 Estimating Achievable Machining Tolerances

Each machining operation creates a feature which has certain geometric variations compared to its nominal geometry. Designers normally give *design tolerance* specifications on the nominal geometry, to specify how large these variations are allowed to be. To verify whether or not a given operation plan will produce the desired design tolerances, we want to estimate what tolerances the operations can achieve.

To get the most accurate results, the best technique is to construct a mathematical model of the machining process. To date, we have done this for turning and boring—and our methodology can easily be extended to model all machining processes involving single-point cutting tools. By modeling the relative motion of the workpiece and the cutting tool, we produce models of topography resulting from the machining process—and from these models, we calculate the achievable tolerances and surface finishes produced by the machining process. Our models take into account the following factors:

1. The machining system parameters, such as the feed rate, cutting speed, depth of cut, and structural dynamics [38, 33, 34, 15, 18].
2. The natural and external variations in the machining process. For example, variations in hardness in the material being machined cause random vibration, which is one of the factors affecting the surface quality [35, 36, 18].

To model these factors, we use a combination of deterministic, statistical, and empirical techniques [35, 36, 38, 33, 34, 18].

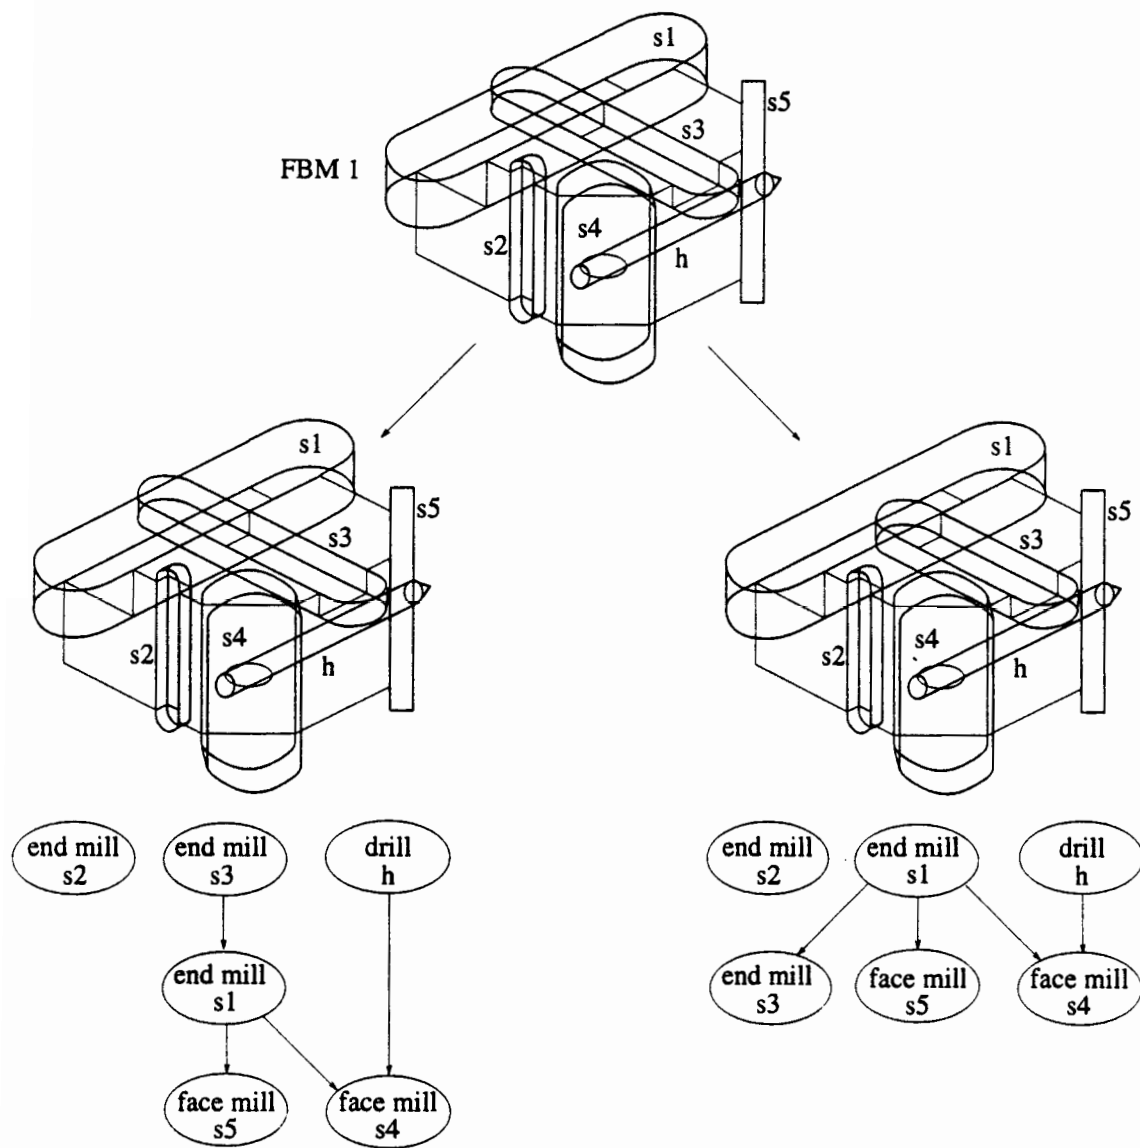


Figure 9: Generating Operation Plans from FBM 1

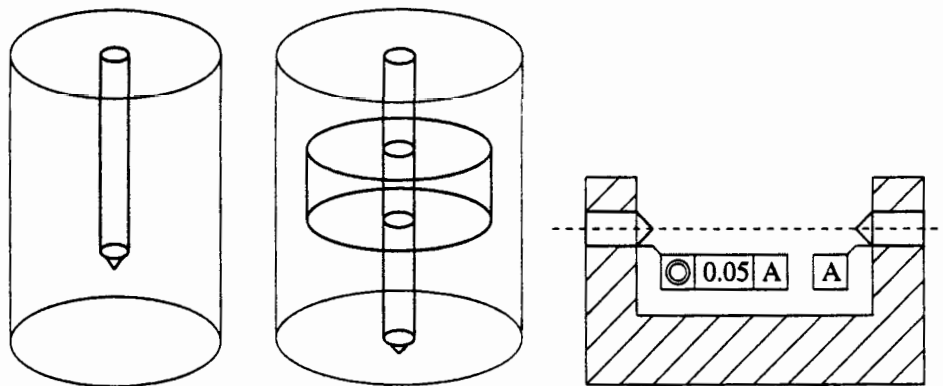


Figure 10: Examples of features which lead to unpromising operation plans.

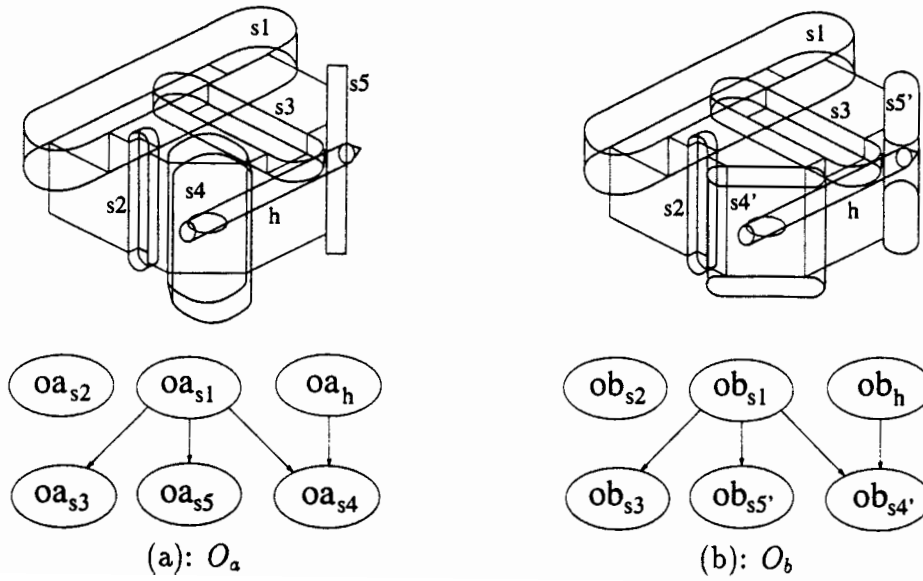


Figure 11: Two Different Operation Plans

Machining processes that do not involve single-point cutting tools are complex. Mathematical models to describe drilling, milling, and grinding processes can be found in the relevant literature. In our approach, empirical models are also used to estimate machining tolerances. The approach is similar to tolerance charting. For the sake of brevity, we omit the details.

Example. For the part shown in Fig. 6, Fig. 11 shows two operation plans O_a and O_b . O_a was generated from FBM 1 (it is the rightmost of the plans shown in Fig. 9), and O_b was generated from FBM 2. The details of these two plans are presented in the Appendix. As we discuss later in Section 7.2, O_a is the plan that produces the shortest production time for this part. However, O_b is the plan that produces the tightest machining tolerances.

Tables 2 and 3 present the estimated achievable tolerances for operation plan O_a and O_b respectively. Note that because of setup changes between the operations in operation plan O_a , the achievable angularity tolerances between $u1$ and $u2$, and between $u1$ and $u3$, are worse than in O_b . If designer had specified a tighter angularity tolerance, then O_a would have not been able to achieve that tolerance.

7.2 Estimating Production Cost and Time

The total time of a machining operation consists of two components, the cutting time (during which the tool is actually engaged in machining), and the non-cutting time (which includes the tool-change time, setup time, etc.). Methods have been developed for estimating the fixed and variable costs of machining operations; conventional formulas for estimating these costs can be found in standard handbooks related to machining economics, such as [32, 31]. The particular formulas we use to evaluate the production cost and time for machining processes are presented in [37, 18].

Table 2

Achievable tolerances for operation plan O_a

Surface(s)	Tolerance Type	Operations	Design	Achievable
$u1$	flatness	oa_{s1}	0.05	0.05
$u1, u2$	angularity	oa_{s1}, oa_{s4}	0.20	0.20
$u1, u3$	angularity	oa_{s1}, oa_{s5}	0.20	0.20
$u4, u5$	length	oa_{s3}	+0.15, -0.15	+0.10, -0.10
$u6$	diameter	oa_h	+0.25, -0.00	+0.20, -0.00

Table 3

Achievable tolerances for operation plan O_b

Surface(s)	Tolerance type	Operations	Design	Achievable
$u1$	flatness	ob_{s1}	0.05	0.05
$u1, u2$	angularity	$ob_{s1}, ob_{s4'}$	0.20	0.10
$u1, u3$	angularity	$ob_{s1}, ob_{s5'}$	0.20	0.10
$u4, u5$	length	ob_{s3}	+0.15, -0.15	+0.10, -0.10
$u6$	diameter	ob_h	+0.25, -0.00	+0.20, -0.00

Table 4

Time estimates for plan O_a

Operation	Time (min)
oa_h	1.42
oa_{s1}	2.08
oa_{s2}	0.25
oa_{s3}	0.50
oa_{s4}	0.42
oa_{s5}	0.42
4 setup changes	6.0
6 tool changes	1.0
Total time	12.09

Table 5

Time estimates for plan O_b

Operation	Time (min)
ob_h	1.42
ob_{s1}	2.08
ob_{s2}	0.25
ob_{s3}	0.50
$ob_{s4'}$	3.13
$ob_{s5'}$	3.13
2 setup changes	3.0
4 tool changes	0.66
Total time	14.17

Examples. Tables 4 and 5 present time estimates for operation plans O_a and O_b . In estimating the production time for milling operations, we have added the half the tool diameter to each slot and face length to account for lead-in and break-through. We assume that the part will held in a vise. The setup-change time for the vise is taken from [31]. Although we can similarly estimate the production costs for O_a and O_b , we omit this for the sake of brevity.

7.3 Tradeoffs

From the above calculations, it is clear that which of the two operation plans is preferable will depend on the machining tolerances and cost objectives.

Operation plan O_b involves fewer setups than operation plan O_a , thus offering an opportunity to achieve a higher machining accuracy. In particular, O_b will be preferable when a tight angularity tolerance is required. But because of the number of passes required for machining $u2$ and $u3$, operation plan O_b requires a larger production time than O_a .

When the angularity tolerance requirement is not tight (as is the case for the design specifications shown in Fig. 6), the main objective in process planning may be to achieve a low production time while maintaining an acceptable machining accuracy. Under such circumstances, O_a will be preferable.

8. RESEARCH ISSUES

8.1 Generating Redundant FBMs

It is often desirable to use a roughing operation to remove a volume of material followed by a finishing operation in which the swept volume of the tool completely subsumes the removal volume of the roughing operation. Examples are (i) making a hole by drilling and then reaming the hole and (ii) making a slot with a roughing end mill and then finishing the slot with a slightly larger finish end mill.

It follows that redundant FBMs must be considered at some point. The procedure described in this chapter does not allow redundant FBMs at any point. The redundant FBMs should certainly be generated before a cutting order is established and the cost is estimated. (For example, if we are drilling and boring a dozen similar holes in a workpiece, the lowest-cost order is to drill them all then bore them all).

8.2 Alternative FBMs for Different-Sized Tools

If we use machining features to represent the swept volume of the cutting portion of the tool, then we will need take into account the possibility of using different tools when we generate alternative FBMs. For example:

1. If we are cutting a pocket whose outline is an hourglass shape (or any shape with a bottleneck in it), the cost-effective method is to use a large tool to cut the bottom and top of the hourglass and a small tool to cut the narrow part in the middle where the large tool would not fit. Using the small tool to cut the entire pocket would take too much time. Thus, a machining-feature decomposition must include three machining features for cutting the pocket.
2. If a large pocket contains tight corners into which a large tool will not fit, a large machining feature should be generated in which the tight corners are rounded, and each tight corner should have its own small machining feature. A small tool should be used for the large machining feature, and small tools for the small machining features.
3. If a machining feature is defined for removing some delta volume, in some cases the corners of the machining feature may have radii assigned to them arbitrarily. A smaller radius lets a smaller machining feature be defined (which helps avoid interferences) but requires a small tool, while a larger radius allows a larger tool to be used. Some heuristic rules are needed to determine radii when generating an FBM.

8.3 Setups

Our current approach does not deal with the machinability considerations involved with setting up the machine tool in order to perform the machining operations. Addressing this issue is a major problem for future work.

9. CONCLUSIONS

In this chapter, we have described a systematic way to generate and evaluate alternative operation plans for a given design. This work represents a step toward the following long-term goals:

1. Providing information about alternative ways in which the part might be machined. We hope this information will aid process engineers or process planning systems in developing alternative process plans, so that the most appropriate plan can be selected depending upon machine tool availability and/or other constraints specific to plant facilities.
2. Pushing process engineering upstream, by providing information about the manufacturability of the design. We hope this information can help designers modify the design if necessary to balance the need for efficient machining against the need for a quality product.

Some of the benefits of our approach are listed below:

1. Since we consider various alternative ways of machining the part, this allows us to consider how well each one balances the need for a quality product against the need for efficient manufacturing.
2. Our approach is based on theoretical foundations which we hope will enable us to make rigorous statements about the soundness, completeness, efficiency, and robustness of the approach.

We anticipate that the results of this work will be useful in providing a way to speed up the evaluation of new product designs in order to decide how or whether to manufacture them. Such a capability will be especially useful in flexible manufacturing systems, which need to respond quickly to changing demands and opportunities in the marketplace.

ACKNOWLEDGEMENT

We wish to thank Tom Kramer for his many helpful comments.

REFERENCES

- [1] P. Brown and S. Ray. Research issues in process planning at the national bureau of standards. In *19th CIRP International Seminar on Manufacturing Systems*, pages 111-119, June 1987.

- [2] Tien-Chien Chang. *Expert Process Planning for Manufacturing*. Addison-Wesley Publishing Co., 1990.
- [3] T. H. Corman, C. E. Leiserson, and R. L. Rivest. *Introduction to Algorithms*. MIT Press/McGraw Hill, 1990.
- [4] Leila De Floriani. Feature extraction from boundary models of three-dimensional objects. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 11(8), August 1989.
- [5] R. Gadh and F. B. Prinz. Recognition of geometric forms using the differential depth filter. *Computer Aided Design*, 24(11):583–598, November 1992.
- [6] N.N.Z. Gindy. A hierarchical structure for form features. *Int. J. Prod. Res.*, 27(12):2089–2103, 1989.
- [7] S.K. Gupta, D.S. Nau, and G.M. Zhang. Estimation of achievable tolerances. Technical Report TR-93-44, Institute for Systems Research, University of Maryland, College Park, Md-20742, 1993.
- [8] C. C. Hayes and P. Wright. Automatic process planning: using feature interaction to guide search. *Journal of Manufacturing Systems*, 8(1):1–15, 1989.
- [9] K. E. Hummel and C. W. Brown. The role of features in the implementation of concurrent product and process design. In *ASME Winter Annual Meeting*, pages 1–8, New York, NY 10017, 1989. ASME. DE-Vol 21, PED-Vol 36.
- [10] N.C. Ide. Integration of process planning and solid modeling through design by features. Master's thesis, University of Maryland, College Park, Department of Computer Science, 1987.
- [11] S. Joshi and T. C. Chang. Graph-based heuristics for recognition of machined features from a 3d solid model. *Computer-Aided Design*, 20(2):58–66, March 1988.
- [12] R. Karinithi and D. Nau. An algebraic approach to feature interactions. *IEEE Trans. Pattern Analysis and Machine Intelligence*, 14(4):469–484, April 1992.
- [13] Raghu Karinithi, Dana S. Nau, and Qiang Yang. Handling feature interactions in process planning. *Applied Artificial Intelligence*, 6(4):389–415, October-December 1992. Special issue on AI for manufacturing.
- [14] A. Klein. A solid groove feature based programming of parts. *Mechanical Engineering*, March 1988.
- [15] Machinability Data Center. *Machining Data Handbook*. Metcut Research Associates, Cincinnati, Ohio, second edition, 1972.
- [16] M. Mantyla, J. Opas, and J. Puhakka. Generative process planning of prismatic parts by feature relaxation. Technical report, Helsinki Institute of Technology, Laboratory of Information Processing Science, Finland, Feb 1989.

- [17] D. S. Nau. Automated process planning using hierarchical abstraction. *TI Technical Journal*, pages 39–46, Winter 1987. Award winner, Texas Instruments 1987 Call for Papers on AI for Industrial Automation.
- [18] D. S. Nau, G. Zhang, and S. K. Gupta. Generation and evaluation of alternative operation sequences. In A. R. Thangaraj, A. Bagchi, M. Ajanappa, and D. K. Anand, editors, *Quality Assurance through Integration of Manufacturing Processes and Systems, ASME Winter Annual Meeting*, volume PED-Vol. 56, pages 93–108, November 1992.
- [19] Yun Peng and James A. Reggia. Diagnostic problem-solving with causal chaining. *International Journal of Intelligent Systems*, 2:265–302, 1987.
- [20] P. Prabhu, S. Elhence, H. Wang, and R. Wysk. An operations network generator for computer aided process planning. *Journal of Manufacturing Systems*, 9(4):283–291.
- [21] J. A. Reggia, D. S. Nau, and P. Y. Wang. A formal model of diagnostic inference. II. algorithmic solution and applications. *Information Sciences*, 37:257–285, 1985.
- [22] W. C. Regli and D. S. Nau. Recognition of volumetric features from CAD models: Problem formalization and algorithms. Technical Report Tech. report ISR-TR-93-41, Institute for Systems Research, University of Maryland.
- [23] W. C. Regli and D. S. Nau. Building a general approach to feature recognition of material removal shape element volumes (MRSEVs). In Jaroslaw Rossignac and Joshua Turner, editors, *Second Symposium on Solid Modeling Foundations and CAD/CAM Applications*. ACM SIGGRAPH, May 19-21 1993.
- [24] Aristides A. G. Requicha. Representation for rigid solids: Theory, methods, and systems. *Computing Surveys*, 12(4):437–464, December 1980.
- [25] Hiroshi Sakurai and David C. Gossard. Recognizing shape features in solid models. *IEEE Computer Graphics & Applications*, September 1990.
- [26] J. J. Shah and M.T. Rogers. Functional requirement and conceptual design of the feature based modeling system. *Computer Aided Engineering Journal*, 7(2):9–15, February 1988.
- [27] Jami J. Shah. Assessment of features technology. *Computer Aided Design*, 23(5):331–343, June 1991.
- [28] G. P. Turner and D. C. Anderson. An object oriented approach to interactive, feature based design for quick turn around manufacturing. In *ASME-computers in Engineering Conference*, San Fransisco, CA, July-Aug. 1988.
- [29] Jan H. Vandenbrande. *Automatic recognition of machinable features in solid models*. PhD thesis, Electrical Engineering Department, University of Rochester, 1990.
- [30] H.P. Wang and J.K. Li. *Computer Aided Process Planning*. Elsevier Science Publishers, 1991.

- [31] F.W. Wilson and P.D. Harvey. *Manufacturing Planning and Estimating Handbook*. McGraw Hill Book Company, 1963.
- [32] W. Winchell. *Realistic Cost Estimating for Manufacturing*. Society of Manufacturing Engineers, 1989.
- [33] G. M. Zhang. A system performance index approach to the selection of boring machining data. *Transactions of the North American Research Manufacturing Research Institute of SME*, pages 130–136.
- [34] G. M. Zhang and S. G. Kapoor. Dynamic modeling and analysis of the boring machining system. *Journal of Engineering for Industry, Transaction of ASME*, 109:219–226, May 1987.
- [35] G. M. Zhang and S. G. Kapoor. Dynamic generation of machined surface, part- i: Mathematical description of the random excitation system. *Journal of Engineering for Industry, Transaction of ASME*, May 1991.
- [36] G. M. Zhang and S. G. Kapoor. Dynamic generation of machined surface, part- ii: Mathematical description of the tool vibratory motion and construction of surface topography. *the Journal of Engineering for Industry, Transaction of ASME*, May 1991.
- [37] G. M. Zhang and S. C-Y. Lu. An expert system framework for economic evaluation of machining operation planning. *Journal of Operational Research Society*, 41(5):391–404, 1990.
- [38] G.M. Zhang, S. Yerramareddy, S.M. Lee, and S.C-Y. Lu. Simulation intermittent turning processes. *Journal of Dynamic Systems, Measurement, and Control, Transactions of the ASME*, 114:458–466, September 1991.

APPENDIX

Table 7 gives details of operation plan O_a for machining Design 1, and Table 8 gives details of operation plan O_b for machining Design 2. Various tools used in these plans are described in Table 6.

Table 6
Description of tools

Tool number	Tool type	Parameters
TD1	HSS STD drill	tool dia = 10 mm
EM1	HSS end mill	tool dia = 40 mm, number of teeth = 4
EM2	HSS end mill	tool dia = 10 mm, number of teeth = 4
EM3	HSS end mill	tool dia = 20 mm, number of teeth = 4
FM1	HSS face mill	tool dia = 40 mm, number of teeth = 4

Table 7
Details of operation plan O_a

Name	Type	Tool	Parameters	Feed and speed
oa_h	hole drilling	TD1	hole dia = 10 mm hole length = 85 mm	feed = 0.10 mm/rev RPM = 600
oa_{s1}	end milling 5 passes	EM1	slot width = 30 mm slot length = 80 mm	feed = 0.20 mm/tooth RPM = 300
oa_{s2}	end milling 2 passes	EM2	slot width = 10 mm slot length = 55 mm	feed = 0.10 mm/tooth RPM = 1200
oa_{s3}	end milling 3 passes	EM3	slot width = 20 mm slot length = 50 mm	feed = 0.15 mm/tooth RPM = 600
oa_{s4}	face milling 4 passes	FM1	face width = 30 mm face length = 55 mm	feed = 0.30 mm/tooth RPM = 600
oa_{s5}	face milling 4 passes	FM1	face width = 30 mm face length = 55 mm	feed = 0.30 mm/tooth RPM = 600

Table 8
Details of operation plan O_b

Name	Type	Tool	Parameters	Feed and speed
ob_h	hole drilling	TD1	hole dia = 10 mm hole length = 85 mm	feed = 0.10 mm/rev RPM = 600
ob_{s1}	end milling 5 passes	EM1	slot width = 30 mm slot length = 80 mm	feed = 0.20 mm/tooth RPM = 300
ob_{s2}	end milling 2 passes	EM2	slot width = 10 mm slot length = 55 mm	feed = 0.10 mm/tooth RPM = 1200
ob_{s3}	end milling 3 passes	EM3	slot width = 20 mm slot length = 50 mm	feed = 0.15 mm/tooth RPM = 600
$ob_{s4'}$	end milling 15 passes	EM1	slot width = 15 mm slot length = 30 mm	feed = 0.20 mm/tooth RPM = 300
$ob_{s5'}$	end milling 15 passes	EM1	slot width = 15 mm slot length = 30 mm	feed = 0.20 mm/tooth RPM = 300