NISTIR 7146

Integrated Supply Chain Simulation System – A Design Specification for a Generic Supply Chain Simulator

Shigeki Umeda

Guest Researcher Manufacturing Systems Integration Division Manufacturing Engineering Laboratory

Y. Tina Lee

Computer Scientist Manufacturing Systems Integration Division Manufacturing Engineering Laboratory



NISTIR 7146

Integrated Supply Chain Simulation System – A Design Specification for a Generic Supply Chain Simulator

Shigeki Umeda

Guest Researcher Manufacturing Systems Integration Division Manufacturing Engineering Laboratory

Y. Tina Lee

Computer Scientist Manufacturing Systems Integration Division Manufacturing Engineering Laboratory

July 2004



U.S. DEPARTMENT OF COMMERCE Donald L. Evans, Secretary TECHNOLOGY ADMINISTRATION Phillip J. Bond, Under Secretary of Commerce for Technology NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY Arden L. Bement, Jr., Director

Integrated Supply Chain Simulation System --A Design Specification for A Generic Supply Chain Simulator

Shigeki Umeda¹ Management School Musashi University 1-26 Toyotama-kami Nerima Tokyo 176-8543 Japan

Y. Tina Lee Manufacturing Systems Integration Division Manufacturing Engineering Laboratory National Institute of Standards and Technology Gaithersburg, MD 20899-8260 U.S.A.

ABSTRACT

This paper describes a design specification for a generic, supply-chain-simulation system. The proposed simulation system is based on schedule-driven and stock-driven control methods to support the supply chain management. The simulation system includes three processing modes: business process flows, material process flows, and information process flows. The paper also discusses interface data requirements for the proposed supply-chain-simulation system.

Keywords: Information requirements, simulation, supply chain, and system integration.

DISCLAIMER

No approval or endorsement of any commercial product by the National Institute of Standards and Technology is intended or implied. The work described was funded by the United States Government and is not subject to copyright.

1 INTRODUCTION

The primary goal of supply chains is to provide manufactured products to end-customers. Modern manufacturing enterprises must collaborate with their business partners in the activities of designing, manufacturing, and distributing their products. Supply chain management is one of the hottest topics in production planning and control areas. Supply chain planning is, in a sense, restructuring a business system for supply chain members to collaborate with each other by exchanging information.

This restructuring frequently involves fundamental decisions regarding business activities and, more importantly, these decisions must be made in full collaboration with business partners. In making these decisions, each enterprise must develop a flexible management system to survive in today's competitive business environment. Supply chain managers, in both planning phases and operational phases, face various kinds of problems, such as capacity planning, production planning, inventory planning and others. Systematic approaches are needed to support planning and control of such supply chain systems.

Simulation is an effective tool to optimize designs and operations of manufacturing and logistics systems. The strength of simulation, in comparison with mathematical programming methods [Geoffrion 1974] or stochastic models [Cohen 1988], is to enable users to observe and analyze the dynamic behaviors in the target system.

Realization of supply chain simulation revealed several technical difficulties, including modeling of business process and data communication, representation of a synchronization mechanism of information-flow with material-flow, and building simulation models.

Modeling requirements and a framework for a generic simulation system that supports design, planning and operation of supply chain systems have been identified [Umeda 2004]. It is recommended that common control methods of manufacturing systems are also applicable to supply chain modeling. The common control methods identified are "schedule-driven control" and "stock-driven control," which are based on material management policies in discrete manufacturing systems [Arnold 2001]. This paper applies these concepts to simulation modeling. The following sections give detailed descriptions of models, which simulate activities and data flows of an individual chain member. Major topics include the design specifications of a generic supply chain simulator and its interface

¹ Research performed while the author is a guest researcher at the National Institute of Standard and Technology.

data requirements.

2 SIMULATION MODEL DESCRIPTIONS

A generic, supply-chain simulation system is proposed based on the modeling requirements and modeling framework that has been identified previously [Umeda 2004]. This section describes fundamental designs for the proposed simulation system. The following sub-sections describe the system's configuration and management.

2.1 Supply chain system configuration

There are many types of supply chain systems. Figure 1 represents an example of a supply chain system. This chain includes three 1st-tier and two 2nd-tier suppliers, a final product plant, a retailer that possesses a warehouse, a transporter, a 3rd party logistics company that directly delivers products to customers, and three consumers. Our previous work classified chain members into six types, based on their business behaviors [Umeda 2004]. These six types of chain members are "supplier," "source," " deliverer," " consumer," and "planner." The proposed simulation system also uses this classification method to represent all supply chain members.

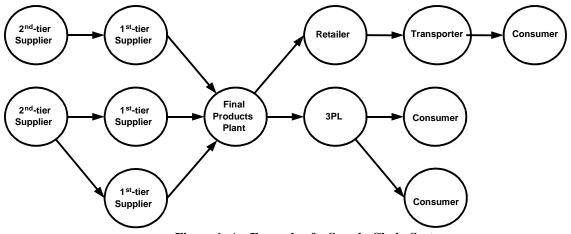


Figure 1: An Example of a Supply Chain System

The function the particular chain member performs is italicized in the discussion that follows. Supplier *produces* products or parts by using materials that another supplier provided. Source is a special supplier that *generates* materials. Every material flow in a chain starts with a source. Storage is a supplier that *stores* materials until another chain member requires them. An example of storage is a warehouse in a distribution network. Deliverer *transports* materials from a particular chain member to another. A 3rd Party Logistics (3PLs) company is one of the typical examples of deliverer. Consumer *gives* purchase orders and *receives* products. Planner makes operational plans for all chain members in order to deliver products to consumers just in time. Planner *controls* other chain members by giving orders to them or sending signals to replenish materials. Planner often plays a role as a supervisor of suppliers. Table 1 provides a definition and example of each chain member type. Figure 2 is another representation of the supply chain example that is shown in Figure 1.

In Figure 2, planner is represented with a shaded circle. It plays a very important role in managing the chain. Although the planner shows no visible connection to any member, it actually communicates with most of the chain members. Planner, in many cases, belongs to the same organization as the final products plant. This planner often generates operational plans over the entire chain to deliver products to consumers in time, and it also manages informational transactions with particular chain members to control them. Activities of each chain member depend on an event sequence that may be defined as an activity model.

Chain Member	Definition	Example	
Supplier	An organization that provides materials in the	Parts manufacturers, material	
	chain.	manufacturers, parts assemble manufacturers, and final products plants.	
Source	An organization that starts the material-flows in the chain. Parts and material suppliers, which start material-flows in the chain.	Material manufacturers.	
Storage	An organization that holds materials, parts, or products.	Warehouses, transportation bases, storehouses, wholesalers, and plant warehouses.	
Deliverer	An organization that transports products, parts, and/or materials between members.	3 rd party logistics companies, UPS, and post office.	
Consumer	An organization or individual who acquires products.	Buyers, consumers, and trading companies.	
Planner	An organization that controls material-flows and information-flows in the chain.	A headquarters of a final products manufacturer, and a supply chain control center.	

Table 1: A Classification of Supply Chain Members

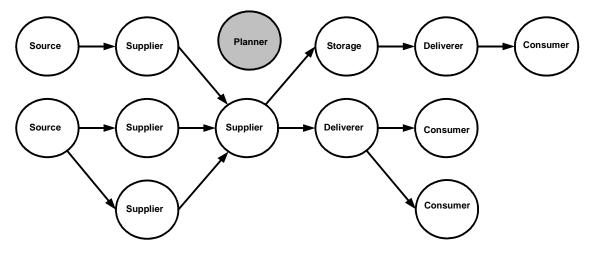


Figure 2: An Example of a Supply Chain System Represented with Abstract Notations

2.2 Control methods of chain members

Schedule-driven and stock-driven control methods are used to support the supply chain management in the proposed simulation system. This section briefs these two control methods.

2.2.1 Schedule-driven control

Schedule-driven control uses a production schedule, the so-called "Master Production Schedule" (MPS), which the supply chain planner generates. The chain planner regularly collects demand data from marketing channels in a constant cycle time. It periodically updates the MPS by using accumulated, demand-prediction data. MPS is a schedule about when finished-goods are delivered to consumers. To generate the MPS, the chain planner generally bases on demands forecast, production plan, availability of materials, and availability of capacity.

The main function of the chain planner is to give periodic operational orders to supply chain members by using MPS and Bills Of Materials (BOMs). The schedule-driven suppliers regularly work with the planner. As shown in Figure 3, the chain planner uses schedule-driven control to repeat the above activities cycle. The activities of planner are summarized as follows:

- 1) It receives purchase orders from consumers.
- 2) It accumulates this purchase data.
- 3) It generates future demand predictions by using the accumulated demand data.
- 4) It updates MPS by using the predicted demand and feedback data from supply chain members.
- 5) It gives orders (sourcing, manufacturing, and shipping) to corresponding chain members.

2.2.2 Stock-driven control

While a schedule-driven supplier works according to the orders sent by the planner, a stock-driven supplier gives orders to itself. "Stock-driven" control method uses stock information of a particular chain member. This member is usually located downstream in the material flow. This member should own two parameters of input material stock volume: stock-replenishment level and stock-volume level. These two parameters are determined by the planner, which observes the changes of demands. A stock-driven supplier autonomously replenishes material inventories based on these two parameters.

Each "Stock-driven" member continuously observes stock volume at a particular chain member. It starts to produce products when the stock volume is smaller than the stock-replenishment level, and continues to work until the stock volume is equal to or greater than the stock-volume level. Figure 4 is a diagram of the stock-driven, supply chain control. This stock-driven supplier generally works according to the following operational sequences:

- 1) It periodically observes stock-volume data of a particular chain member.
- 2) It starts producing when the stock volume goes down below the stock-replenishment level.
- 3) It stops producing when the stock volume reaches the stock-volume level.

Planner dynamically changes the stock-replenishment level and stock-volume level according to the market demand transition.

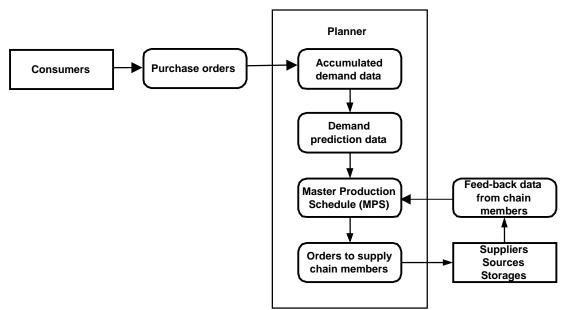


Figure 3: Schedule-driven Supply Chain Control

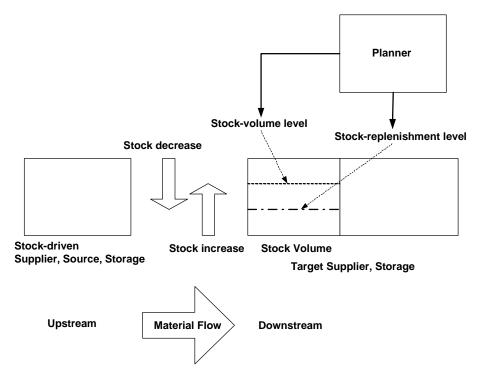


Figure 4: Stock-driven Supply Chain Control

3 SUPPLY CHAIN SIMULATION SYSTEM

This section provides a design specification of the proposed supply chain simulation system. The characteristics, requirements, responsibilities, activities sequence, and performance that each supply chain member holds, for either the schedule-driven or stock-driven methods, are described. There are nine types of players/components: schedule-driven source, stock-driven source, schedule-driven supplier, stock-driven supplier, schedule-driven storage, stock-driven storage, deliverer, planner, and consumer. The following sub-sections, 3.1-3.9, specify detail attributes of each component. Information included in each sub-section is presented in the following categories:

- Material input: The material this component receives from other components.
- **Information input**: The information this component receives from other components.
- Material output: The material this component provides to other components.
- Information output: The information this component provides to other components.
- **Pre-defined information**: The information about the constraints of this component in view of the material capacity.
- Activities sequence: A sequence of activities performed by this component.
- **Performance measure**: A set of measurements representing the component's performance within the supply chain.

3.1 Schedule-driven source

Schedule-driven source receives and executes sourcing orders from the planner, which maintains an MPS. When it is busy, a new order waits in an order queue to be executed. Figure 5 shows the role the schedule-driven source plays and Table 2 details its characteristics, requirements, and/or responsibilities of each attribute.

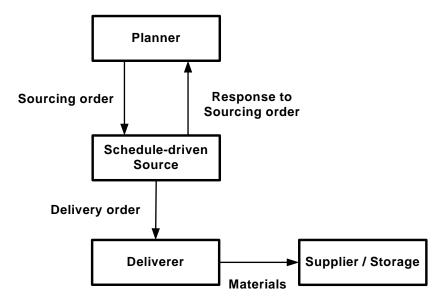


Figure 5: Schedule-driven Source

Table 2: Attributes	of Schedule-driven	Source
---------------------	--------------------	--------

Input	Material	None		
	Information	Sourcing order		
Output	Material	Material		
	Information	Response to sourcing order (planner)		
		Delivery order to the attached deliverer		
Pre-defined	Information	Material name		
		Maximum sourcing volume		
		Sourcing lead-time for maximum sourcing volume		
		Attached deliverer's name		
Activities sequences		 It receives a sourcing order from the planner. When the received order volume reaches the maximum sourcing volume, this sourcing order is divided into multiple sourcing orders. It calculates sourcing lead-time. It waits during sourcing lead-time (sourcing execution). It generates materials in its own buffer. It sends a delivery order to the attached deliverer. 		
Performance measurements		 Mean and standard deviation (S.D.) of Materials in source buffer stock Mean and S.D. of sourcing order waiting time Throughput = Output materials per unit time Utilization rate = Summation of sourcing execution time / Total simulation time 		

3.2 Stock-driven source

Stock-driven source continuously observes the stock volume of a particular chain member. When the materials volume of the target supplier becomes lower than the stock-replenishment level, this source generates materials in its own buffer. Work continues until the stock volume reaches the stock-volume level. When it finishes a sourcing operation for a predefined lot-size, it sends a delivery order to the attached deliverer. This shipment will stop once the volume of materials at the specified supplier reaches or exceeds the stock-volume level. Figure 6 shows the role of the stock-driven source and Table 3 details its characteristics, requirements, and/or responsibilities of each attribute.

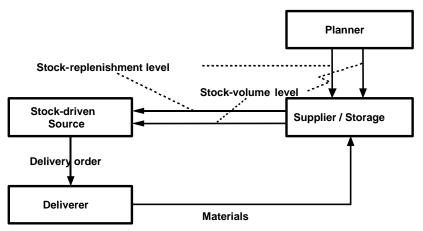


Figure 6: Stock-driven Source

Table 3:	Attributes	of Stock-Dri	iven Source
I and C C C	I LUULIN GUUD		l'en boulee

Input Material		None		
Information				
-		Stock-replenishment level of sourcing material at target supplier		
Output	Material	Material		
	Information	Report about sourcing activity (planner)		
Pre-defined	l Information	Material name		
		Target supplier names		
		Sourcing lot-size: fixed		
		Sourcing lead-time: fixed		
		Stock-replenishment level at the target member		
		Stock-volume level at the target member		
		Attached deliverer's name		
Activities s	sequences	(1) It continuously observes the target material at the target supplier.		
		(2) It sends out a sourcing order when the volume becomes lower than the		
		stock-replenishment level.		
		(3) It waits during sourcing lead-time.		
		(4) It generates materials into its own buffer.		
		(5) It sends a delivery order to the attached deliverer.		
		(6) It stops producing once the volume of materials at the specified		
		supplier reaches or exceeds the stock-volume level.		
		(2) Throughput = Output materials per unit time		
		(3) Utilization rate = Summation of sourcing execution time / Total		
		simulation time		

3.3 Schedule-driven supplier

Schedule-driven supplier receives manufacturing orders from the planner, which maintains an MPS. The schedule-driven supplier executes the manufacturing orders received from the planner. When it is busy, the new incoming order waits at the order queue. Materials stay in the supplier's buffer until the delivery order is received. Figure 7 shows the role of the schedule-driven supplier and Table 4 details its characteristics, requirements, and/or responsibilities of each attribute.

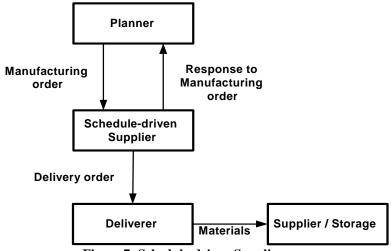


Figure 7: Schedule-driven Supplier

Table 4: Attributes of Schedule-driven Supplier			
Input Material		Materials	
	Information	Manufacturing order	
Output	Material	Materials	
	Information	Response to manufacturing order (planner)	
		Delivery order to the attached deliverer	
Pre-defined	Information	Material name	
		Maximum manufacturing volume	
		Production lead-time per lot-size	
		Attached deliverer name	
Activities sequences (1) It receives materials from an upstream supplier. (2) It receives a manufacturing order from a planner. When the recorder volume exceeds the maximum manufacturing volume, the divided into multiple manufacturing orders. Waiting orders state queue. (3) It calculates manufacturing lead-time. (4) It withdraws materials from the supplier's input buffer. (5) It waits during manufacturing lead-time. (6) It generates materials into output buffer of this supplier.		 (2) It receives a manufacturing order from a planner. When the received order volume exceeds the maximum manufacturing volume, this order is divided into multiple manufacturing orders. Waiting orders stay at a queue. (3) It calculates manufacturing lead-time. (4) It withdraws materials from the supplier's input buffer. (5) It waits during manufacturing lead-time. 	
Performance measurements		 (1) Mean and S.D. of Materials in supplier buffer stock (2) Mean and S.D. of manufacturing order waiting time (3) Throughput = Output materials per unit time (4) Utilization rate = Summation of supplier execution time / Total simulation time 	

3.4 Stock-driven supplier

Stock-driven supplier continuously observes the stock volume at a particular chain member. When the materials volume of the target supplier is lower than the stock-replenishment level, this supplier executes orders. The work continues until the stock volume reaches the stock-volume level. When it finishes a manufacturing operation for a pre-defined lot-size, it sends a delivery order to the attached deliverer. This manufacturing will stop once the volume of materials at the specified supplier reaches or exceeds the stock-volume level. Figure 8 shows the role of the stock-driven supplier and Table 5 details its characteristics, requirements, and/or responsibilities of each attribute.

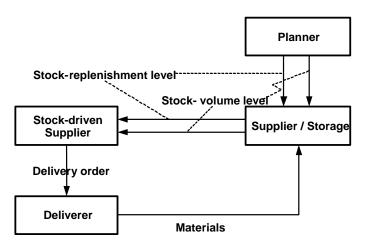


Figure 8: Stock-driven Supplier

Table 5: Attributes	of Stock-dr	iven Supplier
---------------------	-------------	---------------

Input	Material	Material	
-	Information	Stock-replenishment level of at target supplier	
		Stock volume at the target member	
Output	Material	Material	
-	Information	Report about manufacturing activity (planner)	
Pre-defined	Information	Target material name	
		Target supplier names	
		Manufacturing lot-size: fixed	
		Manufacturing lead-time: fixed	
		Attached deliverer name	
Activities se	equences	(1) It receives materials from upstream suppliers.	
		(2) It periodically observes the target material volume at the target supplier.	
		(3) It sends out a manufacturing order when the volume becomes lower than	
		the stock-replenishment level.	
		(4) It withdraws manufacturing lot-sized materials from the input material buffer.	
		(5) It waits during manufacturing lead-time.	
		(6) It generates manufacturing lot-sized materials into its own output buffer.	
		(7) It sends a delivery order to the attached deliverer.	
		(8) It stops working once the volume of materials at the specified supplier reaches or exceeds the stock-volume level.	
Performance measurements		(1) Mean and S.D. of Materials in source buffer stock	
		(2) Mean and S.D. of manufacturing order waiting time	
		(3) Throughput = Output materials per unit time	
		(4) Utilization rate = Summation of supplier manufacturing execution time /	
		Total simulation time	

3.5 Schedule-driven storage

Schedule-driven storage receives orders from the planner, which maintains an MPS. A chain planner often plans to

store materials for future demand fluctuation. The schedule-driven storage plays an important role in such scenarios. Schedule-driven storage receives materials and saves them when materials are received from the up-stream suppliers. Schedule-driven storage sends a delivery order to the attached deliverer when it receives the shipment orders from the planner. When it is busy, a new incoming order waits at the order queue. Figure 9 shows the role of the schedule-driven storage and Table 6 details its characteristics, requirements, and/or responsibilities of each attribute.

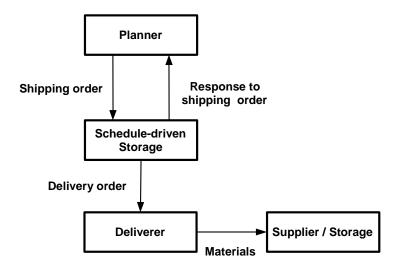


Figure 9: Schedule-driven Storage

Table 0: Attributes of Schedule-driven Storage				
Input	Material	Material		
	Information	Shipping order		
Output	Material	Material		
	Information	Response to shipping order (planner)		
		Delivery order to the attached deliverer		
Pre-defined In	nformation	Material name		
		Shipping lot-size (maximum shipment volume per an order)		
		Shipping lead-time per lot-size		
		Attached deliverer name		
Activities seq	uences	(1) It receives materials from an upstream supplier.		
		(2) It receives a shipment order from a planner. When the received order		
		volume exceeds the current inventory volume, this order is divided into		
		multiple shipping orders. Waiting orders stay at a queue.		
		(3) It calculates shipping lead-time.		
		(4) It removes materials from the stock.		
		(5) It waits during shipping lead-time.		
		(6) It generates materials into output buffer of this storage.		
		(7) It sends a delivery order to the attached deliverer		
Performance measurements		(1) Mean and S.D. of Materials in Storage buffer stock		
		(2) Throughput = Output materials per unit time		
		(3) Utilization = Summation of shipping execution time / Total simulation		
		time		

3.6 Stock-driven storage

Stock-driven storage, as well as schedule-driven storage, receives materials and stores them when materials arrive from its up-stream supplier. While schedule-driven storage provides materials through the orders received from the planner, the stock-driven storage provides the materials from a particular supplier's buffer. Stock-driven storage

receives materials and saves them, when materials arrive from the up-stream suppliers. Stock-driven storage continuously observes the stock volume in a particular chain member. When the materials volume in the target supplier becomes lower than the stock-replenishment level, this storage generates a delivery order and sends it to the attached deliverer. It stops working when the volume of materials at the specified suppliers reaches or exceeds the stock-volume level. Figure 10 shows the role of the stock-driven storage and Table 7 details its characteristics, requirements, and/or responsibilities of each attribute.

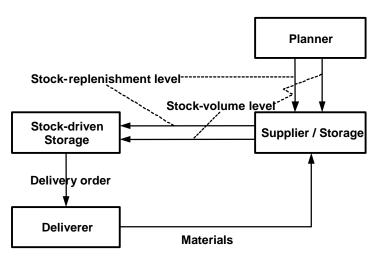


Figure10: Stock-driven Storage

		Table 7: Attributes of Stock-univen Storage	
Input Material		Material	
	Information	Stock-replenishment level of target material at target supplier	
Output Material Material		Material	
	Information	Delivery order to the attached deliverer	
Pre-define	d Information	Target supplier names	
		Target material name	
		Stock-replenishment level	
		Stock-volume level	
		Shipping lot-size (maximum production volume per an order)	
		Shipping lead-time per lot-size	
		Attached supplier's buffer	
Activities	sequences	(1) It periodically observes the target material at the target supplier.	
		(2) It puts the order into a queue and waits until the stock's material resource is	
		available, that is when the stock volume becomes lower than the	
		stock-replenishment level.	
		(3) It withdraws lot-sized materials from the material buffer.	
		(4) It works during shipping lead-time.	
		(5) It generates materials into its own output buffer.	
		(6) It sends a delivery order to the attached deliverer.	
		(7) It stops working when the volume of materials at the specified supplier	
		reaches or exceeds the stock-volume level.	
Performan	ce measurements	(1) Mean and S.D. of Materials in Storage buffer stock	
		(2) Throughput = Output materials per unit time	
		(3) Utilization = Summation of shipping execution time / Total simulation time	

Table 7: Attributes of Stock-driven Storage

3.7 Deliverer

Deliverer serves as a generic, physical, material transporter. The deliverer in the simulation model performs no function other than carrying materials from one site to another according to a given order. When it receives the delivery orders from the supplier (usually an immediate up-stream supplier), the deliverer carries materials from

upstream to downstream. When it does not own enough materials to be delivered, it waits for materials. Figure 11 shows the role of the deliverer and Table 8 details its characteristics, requirements, and/or responsibilities of each attribute.

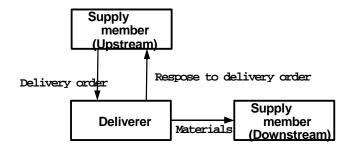


Figure 11: Deliverer

Input	Material	Material				
	Information	Delivery order from supplier/storage/source				
Output	Material	Material				
	Information	Response to delivery order				
Pre-defined	Information	Upstream supplier name/Downstream supplier name				
		Delivery lot-size				
		Delivery time				
Activities s	equences	(1) It receives a delivery order.				
		(2) It delivers materials.				
		(3) It puts materials into the source buffer.				
		(4) It sends a delivery order to the attached deliverer.				
Performanc	e measurements	(1) Throughput = Output materials per unit time				
		(2) Utilization of deliverer resources				

3.8 Planner

Major tasks are providing predictions of future market demands and giving orders to the chain members. The order sent by the planner may be for sourcing, supplying, or shipping. Predictions of market demands in actual business practice is a complex task. The predictions are based on various types of demand data, including non-numerical data such as knowledge-oriented data and heuristics. Further discussion of prediction approaches is beyond the scope of this paper and the proposed simulation only adopts statistical techniques for making such predictions. This section describes input and output information the planner requires, such as: accumulated demand data, demand prediction, and orders and materials levels.

3.8.1 Demand data accumulation

The accumulated demand data is used to forecast demands. Each demand-data record describes one purchase order with information including order identification, consumer, order date, delivery due date, product type, and product quantity. With accumulated demand data, total volume of each specific product ordered in a particular day can be calculated and used for predicting future demands.

3.8.2 Demand prediction

There are many demand forecasting methods using statistical techniques. One of the most popular methods is the exponential smoothing method. An advantage of this method is that the new data can be generated with any weight indicated. The weight given to the latest demand is called a smoothing constant and is represented by alpha (α). This value is always expressed as a decimal from 0 to 1.0. The formula for calculating the new forecast is as follows: New forecast = α * (latest demand) + (1- α) * (previous forecast)

Table 9 represents an example of demand forecasting calculations with α = 0.8 and eight planning phases. Listed in the table is information for each phase, including phase number, actual demand, calculated forecast, predicated

demand, and the difference between a predicated demand and an actual demand. Demand value is expressed in lots. Figure 12 is a graph that compares forecasted and actual data. Initial value of actual demand data and forecast value are both 70 (lots) in this case. Means of actual demand and predicted demand are 66.25 +/- 2.625 and 68.875 +/- 15.14, respectively. This prediction method often produces large errors when the changes of demand trends are increased (see Phases 5 and 8 in Figure 12).

Phase term (i)	0	1	2	3	4	5	6	7	8
Actual demand	70	80	70	60	50	70	70	80	50
Forecast	(70)	56+14	64+14	56+16	48+15	40+13	56+11	56+14	64+14
calculated									
Predicated		70	78	72	63	53	67	70	78
demand									
Difference		-10	8	12	13	-17	-3	10	28
(predicated,									
actual)									

Table 9: An example of Demand Forecast Calculation

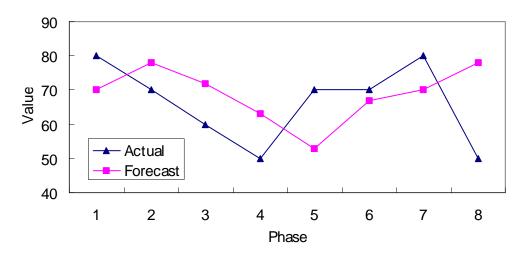


Figure 12: Comparison between Forecast and Actual Demands

The importance in this operation is a concept of "planning phase," or planning cycle-time. In the rest of this subsection, the current phase is treated and represented as the (i)-th phase.

It is a difficult problem to decide how often a planner predicts market demands. Suppose that the planner gives orders daily; the data bias (variance of the data) would be greater if the prediction were calculated weekly. Several methods are considered to reduce data variance; one of them would be to set a demand prediction term longer than ordering cycle-time.

3.8.3 Master production scheduling

MPS represents how the chain plans to produce with specific configurations, quantities, and dates. MPS must take into account the forecast, production plan, backlog, availability of material, availability of capacity, management policies and goals, etc. Tables 10 and 11 represent two MPS polices with different emphases: maintaining a minimum inventory volume and maintaining a constant inventory volume.

Table 10: MPS Policy with Minimum Volume of Inventory

Where Available_Inventory (i) = Available_Inventory (i-1)+MPS(i)-Forecast(i)

Pe	riod	_)		
	Phase term	1	2	3	4	5	6	7
	Forecast	70	80	70	60	55	75	80

Available Inventory	40	50	40	40	50	30	30	30
MPS		80	70	70	70	35	75	80

Table 11: MPS policy with Constant (Equivalence to Average) Inventory

D	•	1
\mathbf{D}_{c}	ric	vd.
10	אונ	JU

Phase term		1	2	3	4	5	6	7
Forecast	70	80	70	60	55	75	80	
Projected Available 40		40	50	50	60	65	60	50
MPS		70	70	70	70	70	70	70

3.8.4 Orders and stock levels

When the planner receives purchase orders from the customer, this order data is divided into two flows. The first is an input to shipment preparation; the other is an input to demand predictor. Shipment preparation is based on the production strategy used. The demand predictor generates a forecast of final products. Figure 13 shows a mechanism to generate production orders. The required forecast term is directly correlated with supply chain structure (Chain depth). The first-tier supplier at the *n*-th planning phase works based on the prediction data at the *n*+1-th planning phase. This is because the materials produced at the first-tier suppliers in the *n*-th phase will be provided to the final product plant for use in the (n+1)-th phase. Similarly, the second-tier supplier at *n*-th phase works based on the prediction data at (n+2)-th phase.

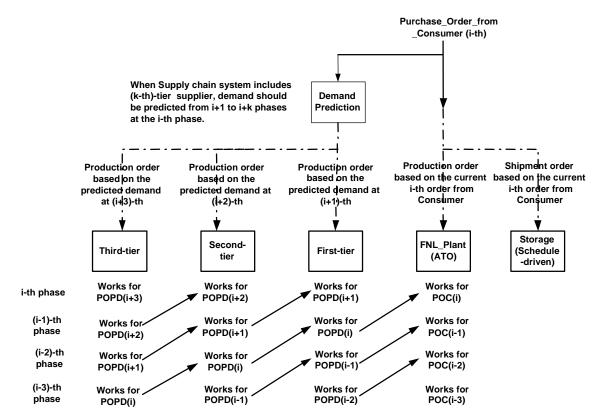


Figure 13: Order Generation Mechanism in Supply Chain Planner

Production strategies may include assemble-to-order (ATO), make-to-order (MTO), configure-to-order (CTO), make-to-stock (MTS), ship-to-stock (STS), etc. The selection of a control method (schedule-drive control or stock-driven control) is determined by the type of production strategy used. Three supply chain scenarios are described here.

1. ATO or MTO with schedule-driven control: The chain is operated according to the ATO or MTO production

strategy. In this case, a schedule-driven supplier produces final products to be delivered directly to consumers. The customers' orders are directly transformed into an assembling (manufacturing) order to a final product plant [Umeda 2004]. The planner gives manufacturing orders to the schedule-driven members, and the schedule-driven member gives a delivery order to the deliverer (refer to Figure 7 and Figure 9).

- MTS with schedule-driven control: The chain is operated according to the MTS production strategy. The customer's orders are transformed directly into a shipment order to a distributor. In this case, final products are stored in a schedule-driven storage. The planner gives shipment orders directly to the schedule-driven storage.
- 3. STS with stock-driven control: The chain is operated according to the STS production strategy. In this case, a stock-driven supplier, the closest supplier to consumers, autonomously works according to the requirements of stock-replenishment-level data and stock-volume data. The planner gives no order to the supplier of final products; however, it sets the "stock-replenishment level" and "stock-volume level" for its stock-driven chain members. When the material shortage rate increases at this member, the planner raises the member's stock-replenishment level. On the other hand, when the material inventory volume increases at this member, the planner reduces the stock-volume level.

Table 12 details the planner's characteristics, requirements, and/or responsibilities of each attribute.

Input	Material	None				
	Information	Purchase order from consumer				
Output	Material	None				
	Information	Production orders to schedule-driven suppliers				
		Shipment orders to particular deliverer				
Pre-defined	Information	Material name				
		Demand record set				
		Planning cycle time				
		Depth of suppliers				
Activities s	equences	(1) It receives purchase orders from consumers. ((i)-th order).				
		(2) It gives delivery orders ((i)-th order) to the deliverer that transports				
		products to consumers, if it owns deliverable stock.				
		(3) It gives production orders ((i)-th order) to the final product suppliers.				
		(4) It adds the current purchase order ((i)-th order) from consumers into a				
		demand record dataset. (This dataset includes all data that is provided by consumers up to the (i)-th phase.)				
		(5) It predicts purchase demands in next ((i+1)-th) time phase by using the demand record dataset.				
		(6) If the suppliers belong to schedule-driven types, it gives production				
		orders (($i + n$)-th predicted order) to the <i>n</i> -th tier suppliers by using predicted demand data.				
		(7) If the particular stock-driven suppliers need supplement order from the				
		planner, it gives stock-replenishment-level data.				
Performanc	e measurements	(1) Mean and S.D. of order lead-time to consumer				
i cirioiniane	e measurements	(2) Mean and S.D. of order delay time to consumer				
		(3) Order on time rate				
		(5) Studi on unio iuto				

Table12: Attributes of Planner

3.9 Consumer

Consumer gives purchase orders to the planner. It also receives products from other chain components (e.g., supplier or storage) by way of a deliverer. Table 13 details the consumer's characteristics, requirements, and/or responsibilities of each attribute.

Input	Material	Products			
	Information	None			
Output	Material	None			
	Information	Purchase orders to planner			
Pre-defined Information		Published order time			
		Received order time			
		Order lead-time			
Activities seque	nces	(1) It generates purchase order.			
-		(2) It sends purchase order.			
		(3) It receives products.			
Performance me	asurements	(1) Mean and S.D. of order lead-time			

Table 13: Attributes of Consumer

4 INTERFACE DATA REQUIREMENTS FOR SUPPLY CHAIN SIMULATION MODEL

This section specifies the information required for the supply chain simulation proposed in this report. A requirement analysis of the supply chain simulation has been performed. This analysis focuses on the data that needs to be exchanged between supply chain members. As a result, a set of data requirements needed for exchange amongst these members has been identified. Local data required by an individual supply chain member is not included in the requirements list. The data requirements are grouped into thirty entities or units of functionality:

- Supply chain
- Product volume data
- Supplier data
- Source data
- Consumer data
- Deliverer data
- Storage data
- Planner data
- MPS data
- Supply chain order data
- Supply chain order status data
- Shipping order data
- Shipping order status data
- Delivery request data
- Delivery status data
- Delivery report data
- Performance report data
- Organizations*
- Calendars*
- Resources*
- Skill definitions*
- Setup definitions*
- Operation definitions*
- Maintenance definitions*
- Parts*
- Bills of materials*
- Inventory*
- Probability distributions*
- Units of measurement*
- Cost summary*

A machine-shop information model has been developed to support the exchange of shop data between various

manufacturing software applications, including simulation. The purpose of developing this model is to use the model's data structures for managing actual production operations and for simulating the machine shop. About twenty major entities and thirty commonly used entities are included in the machine-shop information model. The entities designated by * have been previously defined by McLean et al [McLean 2004].

A brief definition of each entity listed above is included in sub-sections 4.1 - 4.27. More detailed information regarding those entities designated by * in the above list are provided with the machine-shop information model.

4.1 Supply Chain

Supply chain defines the supply chain's identification, products, and each member's role. The supply chain role is an enumeration of consumer, deliverer, planner, source, supplier, and storage.

4.2 Product Volume Data

Product volume data identifies the quantities of products available during each specified time period for various purposes. The purpose may be for a demand forecast, a manufacturing capacity estimation, a stock-replenishment level and stock-volume level assignments, an MPS update, or a stock availability record. Demand forecast predicts the volume of demand for each end product. Manufacturing capacity estimation approximates the volume of each product produced. Stock-replenishment level and stock-volume level are set by a planner but belong to a stock-driven supplier; these two parameters are keys to start or stop a production. MPS specifies at which end products are produced. Stock availability specifies the volume of each product carried over from the previous business phase.

4.3 Supplier Data

Supplier data specifies the materials the supplier organization requires and the products the supplier provides, including manufacturing lot size, manufacturing lead-time, attached deliverer organization, target supplier organizations, and the stock-replenishment level and stock-volume level of each target supplier organization. It also keeps track of manufacturing orders received, manufacturing order responses sent, and delivery orders sent. Information about materials and products' charges and discount options may also be included.

4.4 Source Data

Source data specifies the type and volume of parts that the source organization carries, sourcing lot size, sourcing lead-time, attached deliverer organizations, and the stock-replenishment level and stock-volume level of each target supplier organization. It also keeps track of sourcing orders received, sourcing order responses sent, and delivery orders sent. Information about each part's price and discount options may also be included.

4.5 Consumer Data

Consumer data specifies the products' volume that the consumer organization might consume during a particular business phase. It also keeps track of purchase orders sent, order lead-time, products received time, and product volume of each delivery received.

4.6 Deliverer Data

Deliverer data specifies the deliverer organization's transportation methods and resources including resource type, resource count, delivery lot size, and delivery time. It also keeps track of delivery orders received, delivery order responses, and upstream supplier organizations, as well as downstream supplier organizations. Information about loading equipment requirement, labor requirement, and transportation lead-time may also be included.

4.7 Storage Data

Storage data specifies the type and volume of materials and storage lot size that the storage organization carries. Information included in *storage data* are shipping lot size, shipping lead-time, attached deliverer organizations, target supplier organizations with supplied materials, and the stock-replenishment level and stock-volume level of each target stock-driven supplier. It also keeps track of shipping orders received, shipping order responses, and delivery orders. Each material's price and discount options may also be included.

4.8 Planner Data

Planner data maintains planning cycle time, purchase orders received from consumers, manufacturing orders and shipping orders sent out from the planner, and feed-back data received from chain members. It also keeps track of demand prediction data, the stock-replenishment level and stock-volume level at each stock-driven supplier, and

MPS data.

4.9 MPS Data

MPS data specifies an MPS policy, planning phases, and a set of schedules for final products to be delivered to consumers.

4.10 Supply Chain Order Data

Supply chain order data describes a generic order that is submitted, received, and/or processed for the supply chain. A supply chain order may be a purchase order, a manufacturing order, a sourcing order, or a storing order. Information about the order, including identification, type, date, originator organization, receiver organization, priority, due date, and type and volume of ordered products are included in the *supply chain order data* entity. Order priority is an enumeration of regular and urgent orders.

4.11 Supply Chain Order Status

Supply chain order status data describes the status of the generic supply chain order, which may be a purchase order, a manufacturing order, a sourcing order, or a storing order. Information about the planned shipping date, shipping method, and subtotal charge for each product are included in the supply *chain order status data* entity.

4.12 Shipping Order Data

Shipping order data describes a shipping order for materials or products to be delivered to or picked up from a supply chain organization. Information about the shipping order, including date, type, originator and receiver organizations, pick up time and location, delivery time and location, shipping materials/products, shipment value, transportation cost, and total shipment weight are included in the *shipping order data* entity. The shipping order type is an enumeration of new, revised, and cancelled orders.

4.13 Shipping Order Status Data

Shipping order status data specifies the shipping status of a particular shipping order. Information about the shipping order status, including identification, generation date, origination organization, status code, and original shipping order identifier are included in the *shipping order status* entity. The shipping order status code is an enumeration of pending, in-process, completed, and cancelled orders.

4.14 Delivery Request Data

Delivery request data describes a transportation service request for accomplishing a particular shipping order. Information about the delivery request, including identification, generation date, request originator and receiver organizations, shipping order identifier, and delivery type are included in the *delivery request data* entity. The delivery type is an enumeration of pickup and delivery.

4.15 Delivery Status Data

Delivery status data describes the status of a transportation request service. Information about the delivery status, including identification, date, originator organization, status code, and original delivery request identifier are included in the *delivery status data* entity. The delivery status code is an enumeration of pending, in-process, completed, and cancelled orders.

4.16 Delivery Report Data

Delivery report data summarizes the completion of a particular delivery request service. Information about the delivery request, including identification, date, delivered materials/products, and organizations that receive and send deliveries are included in the *delivery report data* entity.

4.17 Performance Report Data

Performance report data summarizes a supply chain's performance based on a simulation run. Performance data includes statistics regarding production, materials flow, resource utilization, staff utilization, and inventory. Production statistics identify the total products the origination produced in a particular simulation run. Materials-flow statistics identify the organization's throughput, average flow time, and queuing time for each material used in the simulation run. Resource utilization statistics identify the organization's machine utilization (e.g., utilization level, process time, maintenance time, and down time). Staff utilization summarizes each staff's utilization (e.g., utilization level, regular hours, overtime hours, and absentee hours). Inventory statistics identify the inventory's average

work-in-process value and inventory turnover rate during the simulation run.

4.18 Organization*

Organizations is used to maintain the organizational structure, contacts and address information for the manufacturing organization and its customers and suppliers.

4.19 Calendars*

Calendars identifies the shift schedules that are in effect for a period of time, including breaks and holidays.

4.20 Resources*

Resources describe all the resources that may be assigned to tasks in the shop. The resource types available in the machine-shop environment include: stations and machines, cranes, employees, and tool and fixture catalog items.

4.21 Skill Definitions*

Skill-definitions lists the skills that an employee may possess and the levels of proficiency associated with those skills.

4.22 Setup Definitions*

Setup definitions typically specifies tool or fixture setups on a machine. Tool setups are typically the tools that are required in the tool magazine. Fixture setups are work-holding devices mounted on the machine. Setups may also apply to cranes or stations.

4.23 Operation Definitions*

Operation definitions defines the operations that may be performed at a particular station or group of stations in the shop.

4.24 Maintenance Definitions*

Maintenance definitions defines preventive or corrective maintenance to be done on machines or other maintained resources.

4.25 Parts*

Parts provides elements for part specifications, group technology codes, customers, suppliers, as well as links to bills of materials, process plans, drawings, part models, and other references.

4.26 Bills of Materials*

Bills of materials cross-references the parts and quantities required in a hierarchical bill-of-materials structure.

4.27 Inventory*

Inventory identifies the instances and locations for parts, materials, tools, and fixtures inventory.

4.28 Probability Distributions*

Probability distributions specifies distributions that are used to vary processing times, breakdown and repair times, availability of resources, etc.

4.29 Units of Measurements*

Units of measurement describes various measurement units used in the file. For example, the measurement may be specified for distance, speed, mass, time duration, or currency.

4.30 Cost Summary*

Cost summary specifies a summary of costs at various stages including estimation, planning, and actual expenses. The categories of costs include material cost, labor cost, equipment-usage cost, inventory cost, and transportation cost. The element of equipment depreciation, which was missing from the machine shop information model, will be added into this model's data structure.

5 CONCLUSION

A supply-chain-simulation system is proposed in this paper. The design of each component and supply chain member included in the system is described. Planning, control, and operation of the supply chain are discussed. Interface data requirements that support information exchange and sharing amongst chain members are identified. The proposed system has been designed to be generic in order to simulate any typical discrete-event manufacturing in a supply chain. The proposed simulation has also been designed to preserve independence from both usage and implementation. Implementation independence allows users to select their own simulation language. Currently, further work has begun on design of interface requirements' data structures, and development and execution of a prototype supply chain simulation system. It is anticipated that the proposed system will be refined in order to enhance the system's performance and implementers' satisfaction.

6 REFERENCES

Arnold, T. J.R., and S. N. Chapman. 2001. Introduction to Materials Management. 4th edition. Prentice Hall, Inc., USA.

Cohen, M.A., and H. L. Lee. 1998. Strategic analysis of integrated production–distribution systems: Models and methods. Operations Research, 36/2, pp. 216-228.

Geoffrion, A.M., and G. W. Grave. 1974. Multi-commodity distribution system design by Benders Decomposition, Management Science. 20/5, pp. 822-844.

McLean, C., T. Lee, G. Shao, and F. Riddick. 2004. Shop Data Model And Interface Specification. Draft NISTIR. Gaithersburg, Maryland: National Institute of Standards and Technology.

Umeda, S., and S. Jain. 2004. ISSS: Integrated Supply Chain Simulation System -- Modeling Requirement and Design Issues, Draft NISTIR. Gaithersburg, Maryland: National Institute of Standards and Technology.