

Effect of 3D Scaffold Structure on Osteogenic Differentiation of Human Bone Marrow Stromal Cells

Girish Kumar^{1,2}, Marian F. Young², Carl G. Simon, Jr.¹

¹Polymers Division, National Institute of Standards and Technology, Gaithersburg MD 20899, USA

²National Institute of Dental and Craniofacial Research, National Institutes of Health, Bethesda MD 20892, USA

Introduction: 3D structural properties of polymeric scaffolds for tissue engineering play a key role in directing osteogenesis. In addition, much work has demonstrated that cell differentiation is sensitive to topography at sizes ranging from nano- to micro- to macro-scale. Thus, the effect of different scaffold topographies on differentiation of human bone marrow stromal cells (hBMSCs) has been measured.

Materials and Methods: All scaffolds were made from PCL [poly (ϵ -caprolactone), mass-averaged relative molecular mass 80000 g/mol] and were designed to fit in a 48-well plate (12 mm dia.). “Salt-Leached” (SL): 30 % by mass PCL solutions in chloroform were mixed with sieved NaCl (0.25 mm to 0.425 mm) to make a paste that was put into Teflon molds, air dried and salt-leached in water. “Gas-Foamed” (GF): 30 % by mass PCL solutions in chloroform were mixed with sieved ammonium bicarbonate (0.25 mm to 0.425 mm) to make a paste that was put into Teflon molds, air dried and foamed in warm water (40 °C) for 2 h. “Phase-Separated” (PS): 30 % by mass PCL solutions in 7:3 chloroform:butanol (by volume) were mixed with sieved ammonium bicarbonate (0.25 mm to 0.425 mm) to make a paste that was put into Teflon molds, frozen at -80 °C for 2 h, immersed in methanol at -20 °C for 18 h and foamed in warm water (40 °C) for 2 h. “Nanofibers” (NF): 15 % by mass PCL solution in 9:1 by volume chloroform:methanol was pumped at 0.5 mL/h into an electrospinning apparatus running at 15 kV. Polystyrene disks (12 mm) were placed on an aluminum foil target to collect nanofibers. “Freeform Fabricated” (FFF): Scaffolds were purchased in 96-well plates (3DBiotek; disc-shaped 5 mm dia., 2 mm height; 0.3 mm strut dia.). “Spin-Coated” (SC): 10 % by mass PCL solutions in acetic acid were spun onto polystyrene disks (12 mm dia.) and air dried. “Tissue Culture Polystyrene” (TCPS): This is control 2D TCPS. hBMSCs (29 year old female, Tulane University Gene Therapy Center) were cultured according to supplier protocols. hBMSCs were seeded on scaffolds (10,000 cells/well) and cultured in medium with and without osteogenic supplements (OS) (dexamethasone, ascorbic acid, β -glycerophosphate). Cells on scaffolds were fixed (formaldehyde), permeabilized (Triton X-100), stained and imaged by fluorescence or stereomicroscopy.

Results: PCL was used as the polymer in all 3D scaffolds so that contributions from material chemistry could be isolated from topographic effects. PCL spun-coat films were used as a 2D control as well as TCPS. hBMSCs produced a calcium-containing matrix on all scaffolds and substrates by 21 d culture with OS (not shown). However, only NF scaffolds were able to induce osteogenesis by hBMSCs in the absence of OS (Fig. 1). Cell morphology was assessed since it is linked to cell function. hBMSCs were well spread with well-defined actin filaments on 2D substrates (SC, TCPS) and FFF. hBMSCs assumed a stellate morphology with poorly defined actin filaments on the 3D scaffolds (SL, GF, PS, NF).

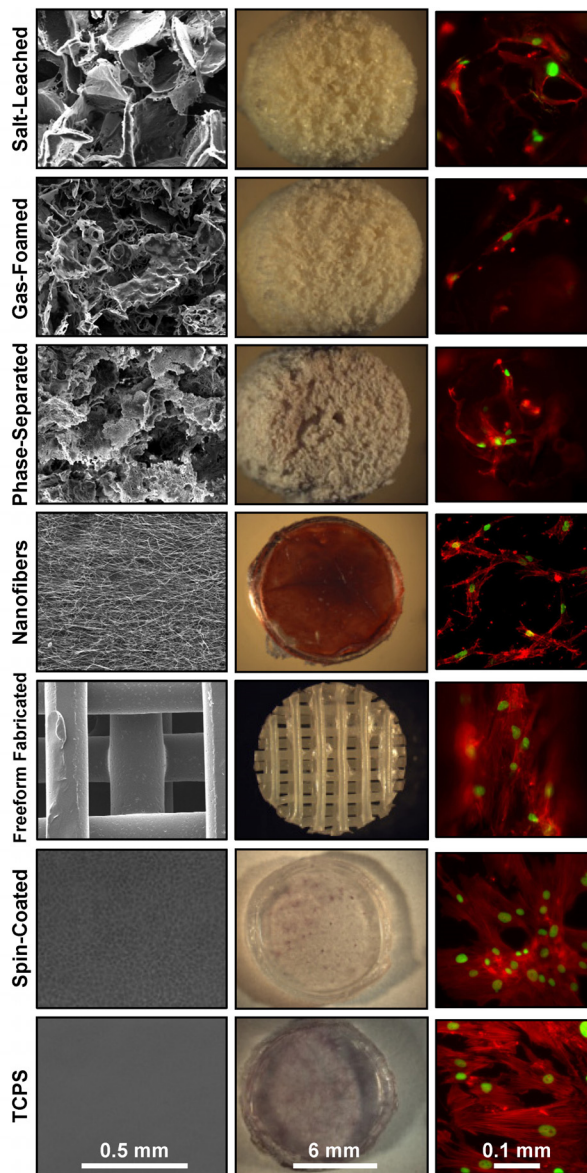


Fig. 1: Left column is scanning electron (SL, GF, PS, NF, FFF) and phase contrast (SC, TCPS) micrographs of scaffolds. Middle column is stereomicrographs of calcium staining (Alizarin red) for osteogenesis by hBMSCs cultured 50 d on scaffolds without OS. Right column is fluorescence micrographs of hBMSCs cultured 7 d on scaffolds without OS (green = nuclei = Sytox green; red = actin = Alexa fluor 546 phalloidin).

Conclusion: These results demonstrate that many PCL scaffold morphologies can support hBMSC osteogenic differentiation in the presence of OS. Only the NF scaffolds induced hBMSC osteogenesis in the absence of OS, suggesting that nanofiber structures can direct differentiation.

Acknowledgements: G.K. is supported by a fellowship from National Academy of Sciences (NIH -NIBIB/NIST NRC). This work was supported in part NIH-NIDCR Intramural Program and NIH-NIBIB R21 EB006497-01. This article, a contribution of the National Institute of Standards and Technology, is not subject to US copyright. Identification of materials/equipment does not imply recommendation by NIST, nor does it imply that materials are the best available for the purpose.