


Food &  
Agriculture



Industrial Materials




High Purity Materials



Radioactivity



Clinical &  
Industrial Hygiene



Environmental



Physical Properties

Environmental



Forensics



Engineering  
Materials



# SRM

## NIST Standard Reference Materials® 2021 Catalog

NIST SP 260-176  
January 2021

www.nist.gov  
Phone: (301) 975-2200  
Email: srminfo@nist.gov

# Mail Orders

Mail Orders (in English) for all NIST SRMs/RMs should be directed to:

Standard Reference Materials Program  
National Institute of Standards and Technology  
100 Bureau Drive, Stop 2300  
Gaithersburg, MD 20899-2300  
USA

Telephone: (301) 975-2200  
E-Mail: [srminfo@nist.gov](mailto:srminfo@nist.gov)  
[www.nist.gov/srm](http://www.nist.gov/srm)

**Each purchase order should give the number of units, SRM number, and name of each reference material requested.**

**Example:**

1 unit, SRM 930e Glass Filters for Spectrophotometry

**The following information must be included with each order:**

- end user contact information
- name of customer
- shipping address
- billing address
- telephone number
- fax number
- purchase order number
- a customer identification number, i.e., a social security number (SSN) for consumer customers, tax identification number (TIN) for commercial customers, or agency code (ALC) for U.S. Government customers

Note: NIST SRMs/RMs are only distributed in the units of issue listed in this catalog and its supplement (price list).  
All purchase orders must be in English.

Receipt of an order does not imply acceptance of provisions set forth in the order that are contrary to the policies, practices, or regulations of the National Institute of Standards and Technology or the United States Government.



NIST SP 260-176

# Standard Reference Materials® Catalog

January 2021

*Editors: Regina R. Montgomery and  
Mary D. Crivellone*

Office of Reference Materials  
National Institute of Standards and Technology  
Gaithersburg, MD 20899-2300  
*Steven J. Choquette, Director*



U.S. Department of Commerce  
*Wynn Coggins, Acting Secretary*

National Institute of Standards and Technology  
*James K. Olthoff, Acting NIST Director and Acting Under  
Secretary of Commerce for Standards and Technology*

Please visit our website  
[www.nist.gov/srm](http://www.nist.gov/srm)

Certain commercial entities, equipment, or materials may be identified in this document in order to describe an experimental procedure or concept adequately. Such identification is not intended to imply recommendation or endorsement by the National Institute of Standards and Technology, nor is it intended to imply that the entities, materials, or equipment are necessarily the best available for the purpose.

**National Institute of Standards and Technology**

Special Publication 260-176

Supersedes NIST SP 260-176, 2020

114 pages (January 2021)

CODEN: NSPUE2

U.S. GOVERNMENT PRINTING OFFICE  
WASHINGTON: 2021

**N**IST Standard Reference Materials® (SRMs) are used by industry, government, and academia to ensure the highest quality measurements. This catalog lists over 1200 individual reference materials produced and sold by NIST, each with carefully assigned values for chemical composition and physical properties.

SRMs find use in calibrating instruments and in assuring the long-term integrity of quality assurance programs. They are also key mechanisms for verifying important measurement results and in developing new measurement methods. SRMs provide users with tools to assist in establishing traceability of measurement results to the International System of Units (SI). Each SRM comes carefully packaged with documentation containing assigned values with stated uncertainties and a material safety data sheet, if applicable. Details on use, stability, and NIST analytical methods are also included.

For further information and prices, contact us at:

Telephone: (301) 975-2200  
E-mail: [srminfo@nist.gov](mailto:srminfo@nist.gov)  
[www.nist.gov/srm](http://www.nist.gov/srm)

**PLEASE NOTE:** The tables are presented to facilitate comparisons among a family of materials to help customers select the best SRM for their needs. For specific values and uncertainties, the certificate is the only official source.

The data given in this catalog is constantly being revised. For the most up-to-date information, please consult our website at <https://www.nist.gov/srm>.



# Table of Contents

## Chemical Composition

<b>Ferrous Metals</b> .....	<b>1</b>
Plain Carbon Steels.....	2
Special Low Alloy Steels.....	2
Low Alloy Steels (chip).....	2
Low Alloy Steels (disk and rod).....	3
High Alloy Steels .....	3
High Temperature Alloys .....	3
Stainless Steels (chip and powder) .....	4
Stainless Steels (disk).....	4
Tool Steels.....	4
Specialty Steels .....	4
Steelmaking Alloys .....	4
Gases in Ferrous Metals .....	5
Cast Steels, White Cast Irons, and Ductile Irons.....	5
Cast Irons.....	5
<b>Nonferrous Metals</b> .....	<b>7</b>
Aluminum Base Alloys.....	8
Cobalt Base Alloys.....	8
Copper Base Alloys (chip, granule and rod).....	8
Copper “Benchmark” .....	8
Copper Base Alloys (block and disk).....	9
Lead Base Alloys .....	9
Nickel Base Alloys .....	9
Tin Base Alloys.....	10
Titanium Base Alloys .....	10
Zinc Base Alloys.....	10
Zirconium Base Alloy.....	10
<b>Microanalysis</b> .....	<b>11</b>
Metals .....	12
Synthetic Glass for Microanalysis .....	12
Semiconductor Thin Film for the Composition of Thin Films .....	12
Nanomaterials: Composition .....	12
<b>High-Purity Materials</b> .....	<b>13</b>
High Purity Metals.....	14
Stoichiometry.....	14
Microchemistry.....	14
Spectrometry, Single Element Standard Solutions.....	14, 15
Arsenic Species Standard Solutions .....	16
Anion Chromatography .....	16
Stable Isotopic Materials .....	16
Light Stable Isotopic Materials.....	17

<b>Health &amp; Clinical Industrial Hygiene</b> .....	<b>19</b>
Clinical Laboratory Materials.....	20
Serum and Plasma Materials.....	21
Ethanol Solutions .....	21
Toxic Substances in Urine.....	21
Drugs of Abuse .....	22
Biomaterials.....	22
Respirable Materials on Filter Media .....	22
Respirable Materials .....	22
DNA Profiling, Nucleic Acid Materials and Monoclonal Antibody.....	23
Lead in Paint, Dust, and Soil .....	24
<b>Inorganics</b> .....	<b>25</b>
Metal (Inorganics) Constituents in Natural Matrices.....	26
Mercury in Activated Carbon .....	27
Environmental Matrices with Carbon Values .....	27
Used Auto Catalysts .....	27
Zeolites .....	27
<b>Primary Gas Mixtures</b> .....	<b>29</b>
Carbon Monoxide in Air.....	30
Carbon Monoxide in Nitrogen.....	30
Carbon Dioxide in Nitrogen.....	31
Continental and Oceanic Air .....	31
Hydrogen Sulfide in Nitrogen.....	31
Methane in Air .....	31
Propane in Air .....	32
Propane in Nitrogen .....	32
Organic Mixtures in Air or Nitrogen .....	32
Nitrogen Oxides in Air or Nitrogen .....	32
Oxygen in Nitrogen .....	33
Sulfur Dioxide in Nitrogen.....	33
<b>Fossil &amp; Alternative Fuels</b> .....	<b>35</b>
Alcohols and Ethers [Oxygenates] in Gasoline.....	36
Metal Constituents in Fossil Fuels .....	36
Sulfur, Mercury, and Chlorine in Fuels.....	36
Moisture in Oils and Alcohols.....	37
Fossil Fuel: Trace Elements .....	37
Biofuels .....	37
Biomass Feedstock .....	37

<b>Organics</b> .....	<b>39</b>
Organics .....	40
EPA: Organic Compounds Related to Water Analysis .....	41
Perfluorinated and Polyfluorinated Alkyl Substances (PFAS) .....	41
Crime Scene Investigations .....	41
<b>Food &amp; Agriculture</b> .....	<b>43</b>
Foods and Beverages .....	44
Food Contaminants and Allergens.....	44
Agricultural Materials.....	45
Fertilizers .....	45
Wheat Hardness.....	45
Dietary Supplement Materials .....	45
Tobacco Related Materials .....	45
<b>Geological Materials &amp; Ores</b> .....	<b>47</b>
Ores.....	48
Ore Bioleaching Substrate.....	48
Clays.....	48
Rock and Minerals .....	48
Refractories .....	48
Soils, Sediments, and Sludges.....	49
<b>Ceramics &amp; Glasses</b> .....	<b>51</b>
Nitrides.....	52
Cemented Carbides .....	52
Glasses .....	52
Trace Elements.....	52
<b>Cement</b> .....	<b>53</b>
Cements and Related Materials.....	54
Portland Cement Clinkers (solid form) .....	54
<b>Engine Wear Materials</b> .....	<b>55</b>
Lubricating Oils .....	56
<b>Forensics</b> .....	<b>57</b>
Ethanol Solutions .....	58
Drugs of Abuse .....	58
DNA Profiling and Nucleic Acid Materials.....	58
Crime Scene Investigations .....	58

# Table of Contents

## Physical Properties

<b>Ion Activity</b> .....	<b>59</b>
pH Standards for Calibration.....	60
Biological Buffer Systems.....	60
pD Calibration.....	60
Ion-Selective Electrode Calibration.....	60
<b>Polymeric Properties</b> .....	<b>61</b>
Polymers.....	62
Melt Flow Rate.....	62
Viscosity.....	62
<b>Thermodynamic Properties</b> .....	<b>63</b>
Combustion Calorimetry.....	64
Solution Calorimetry.....	64
Differential Scanning Calorimetry and Differential Thermal Analysis.....	64
Temperature and Enthalpy of Fusion.....	64
Enthalpy and Heat Capacity.....	64
Thermal Analysis Purity Set.....	64
Defining Fixed Point, International Temperature Scale of 1990, ITS-90.....	64
Reference Points.....	65
Freezing Point, Melting Point, and Triple Point Cells.....	65
Thermocouple Materials and Thermometers.....	65
Thermal Conductivity of Iron, Fibrous Glass, and Polystyrene.....	65
Thermal Expansion of Glass.....	65
Thermal Resistance Properties of Fibrous Glass and Fumed Silica Board.....	65
Thermoelectric Materials.....	65
<b>Optical Properties</b> .....	<b>67</b>
Molecular Absorption.....	68
Fluorescence and Raman Spectroscopy.....	68
Infrared Reflectance (solid form).....	68
Optical Rotation (powder form).....	68
Photography (chart form).....	68
<b>Radioactivity</b> .....	<b>69</b>
Radiation Dosimetry.....	70
Radioactive Solutions.....	70
Radiopharmaceuticals.....	71
Carbon-14 Dating.....	72
Radioactive Natural Matrix Materials.....	72

## Electrical Properties..... 73

Electrical Resistivity and Conductivity of Iron.....	74
Superconducting Critical Current.....	74

## Metrology..... 75

Scanning Electron Microscope (SEM).....	76
Depth Profiling.....	76
Nonmagnetic Coating Thickness.....	77
Microscale Dimensional Measurement Standards.....	77

## Liquids & Glasses..... 79

Chemical Resistance [Durability] of Glass.....	80
Electrical Properties of Dielectrics.....	80
Viscosity of Glass.....	80
Glass Liquidus Temperature.....	80
Viscosity Fixpoints.....	80
Relative Stress Optical Coefficient.....	80
Density.....	80

## X-Ray Diffraction..... 81

X-Ray Diffraction.....	82
------------------------	----

## Engineering Materials

### Sizing..... 83

Particle Size.....	84
Cement and Coal Fly Ash Fineness.....	85
Electrophoretic Mobility, E.....	85
Surface Area of Powders and Mercury Porosimetry Standards.....	85
Particle Count Materials.....	85

### Surface Finish..... 87

Microindentation Hardness.....	88
Abrasive Wear.....	88
Surface Roughness.....	88
Rockwell Hardness.....	88

### Fire Research..... 89

Flooring Radiant Panel.....	90
Standard Cigarettes for Ignition Strength and Ignition Resistance Testing.....	90


### Nanomaterials..... 91

Nanomaterials.....	92
--------------------	----

## Miscellaneous Performance Engineering Materials..... 93

Impact Standards: Charpy V-Notch Specimens.....	94
Tape Adhesion Testing.....	95
Bleached Kraft Pulps.....	95
Secondary Ferrite Standards.....	95
Fracture Toughness of Ceramics.....	96
Magnetic Moment.....	96
Standard Bullet Replica and Cartridge Case.....	96

## Numerical Index..... 97

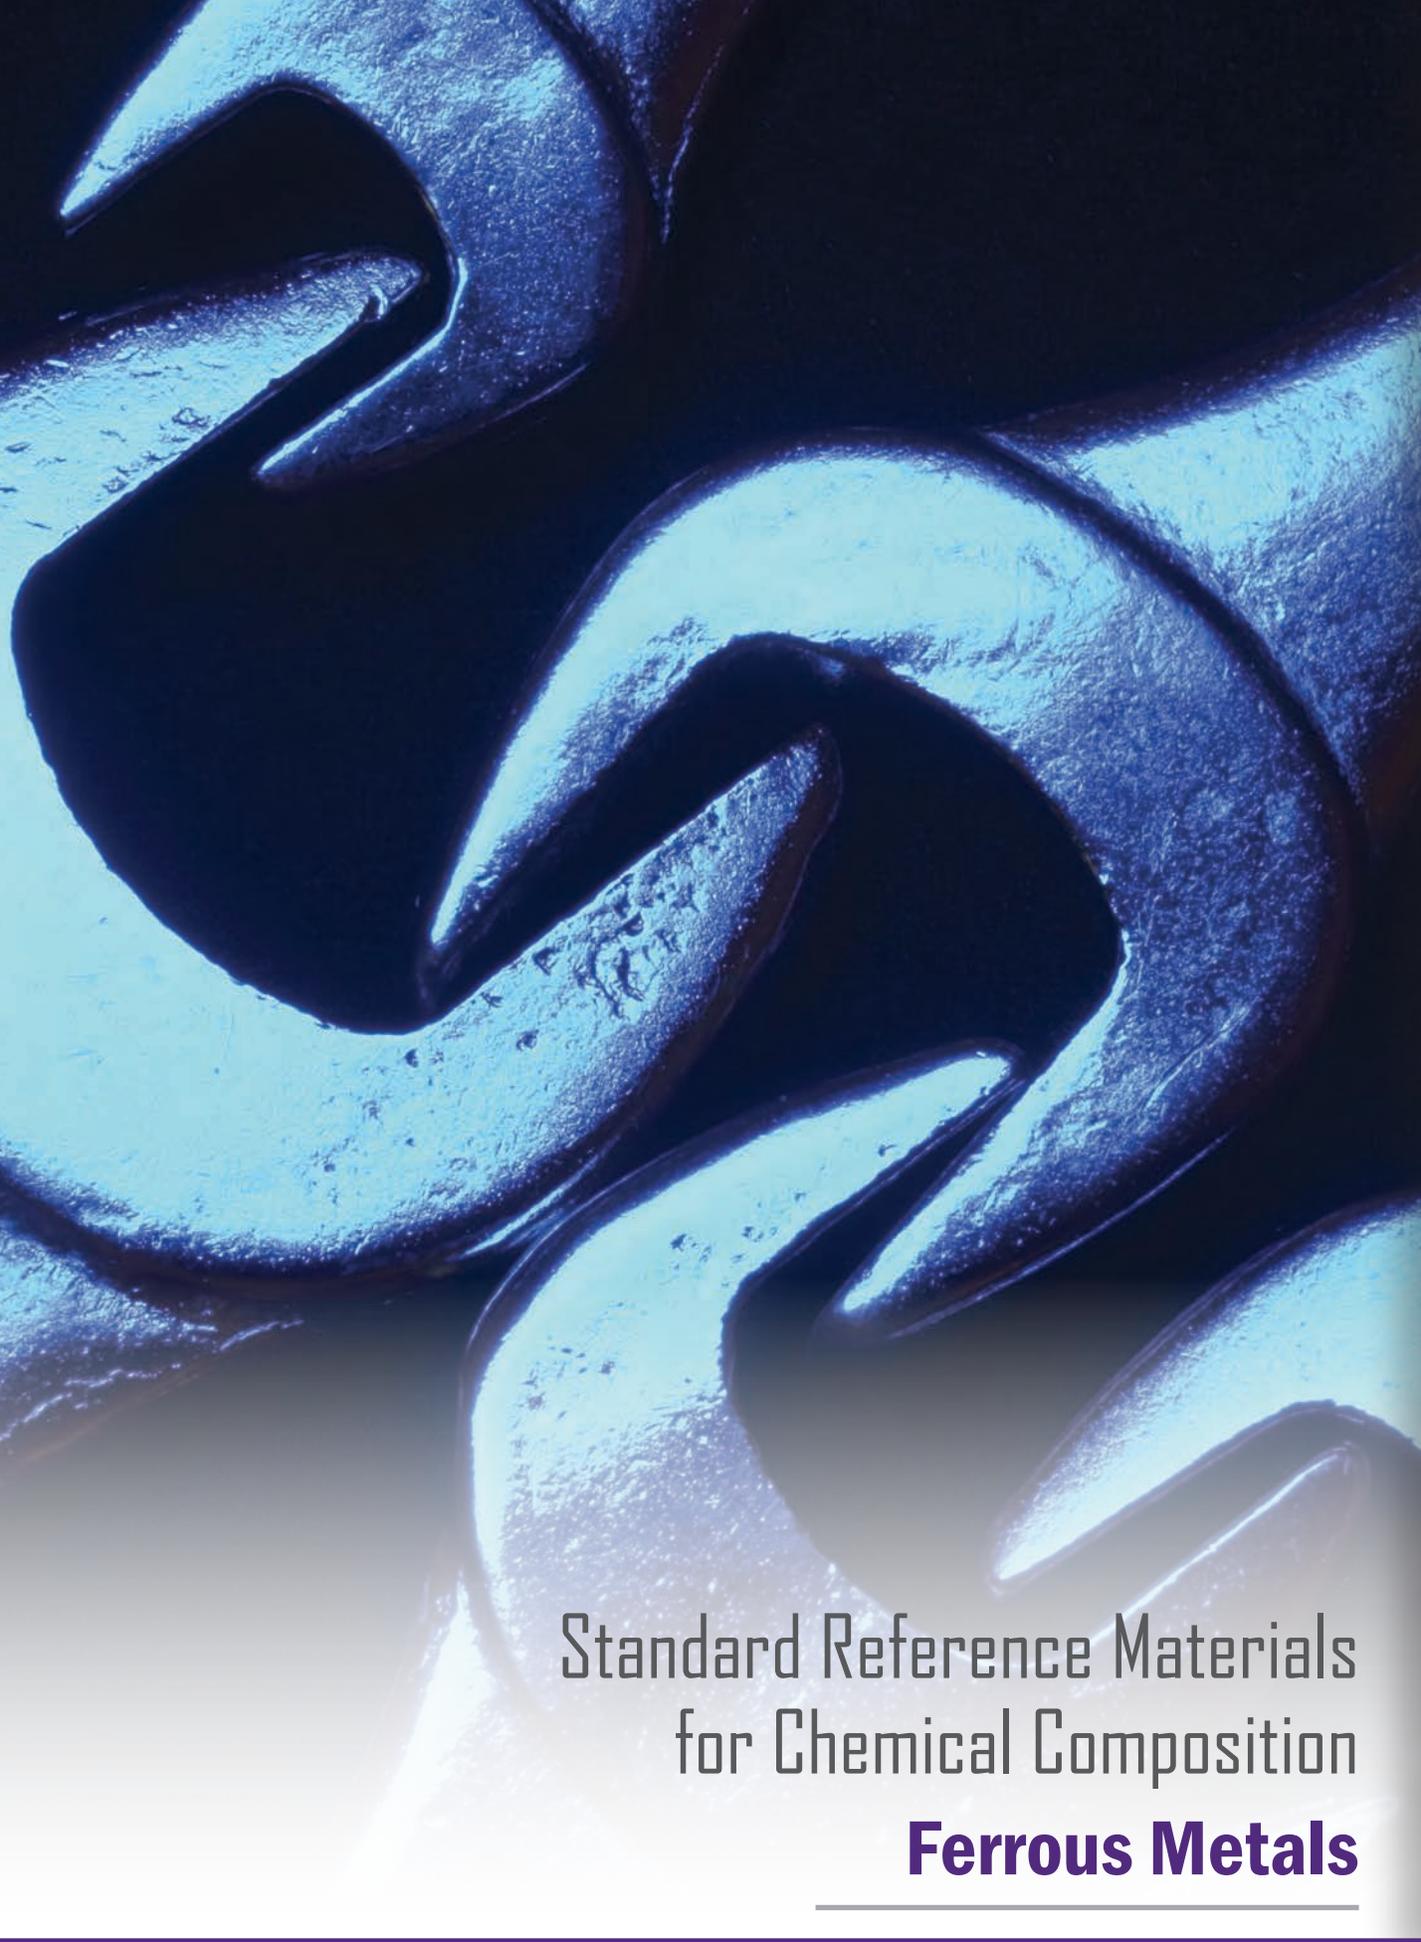

# Standard Reference Materials for Chemical Composition

## **Ferrous Metals**

---

These SRMs are for checking optical emission and X-ray fluorescence spectrometric methods and for other methods of chemical analysis. They consist of steel alloys selected to provide a wide range of analytical values for elements. They are furnished as chips (small metal turnings), rods, disks, pins or powders from selected portions of commercial ingots. A "C" preceding the SRM number indicates a chill cast sample. Certificates are available on the website with information regarding specific alloy composition.

### Plain Carbon Steels (chip form)

SRM	Description	Unit of Issue
8k	Bessemer Steel (Simulated), 0.1 % Carbon	150 g
12h	Basic Open-Hearth Steel, 0.4 % Carbon	150 g
13g	0.6 % Carbon Steel	150 g
14g	Carbon Steel (AISI 1078)	150 g
16f	Basic Open-Hearth Steel, 1 % Carbon	150 g
19h	Basic Electric Steel, 0.2 % Carbon	150 g
20g	AISI 1045 Steel	150 g
152a	Basic Open-Hearth Steel, 0.5 % Carbon (Tin Bearing)	150 g
178	0.4C Basic Oxygen Furnace Steel	150 g
368	Carbon Steel (AISI 1211)	150 g

See [Table 101.1](#) on the website for more information.

### Special Low Alloy Steels (chip and pin forms)

SRM	Description	Unit of Issue
361	AISI 4340 Steel (chip form)	150 g
363	Chromium-Vanadium Steel (Modified) (chip form)	150 g
2160	Low-Alloy Steel (pin form)	200 g
2161	Low Alloy Steel (chip form)	150 g
2162	Low Alloy Steel (chip form)	150 g
2163	Low Alloy Steel (chip form)	150 g
2164	Low Alloy Steel (chip form)	150 g
2165	Low Alloy Steel (chip form)	150 g
2166	Low Alloy Steel (chip form)	150 g
2167	Low Alloy Steel (chip form)	150 g
2168	High-Purity Iron (chip form)	150 g

See [Table 101.3](#) on the website for more information.

### Low Alloy Steels (chip form)

SRM	Description	Unit of Issue
30f	Cr-V Steel (SAE 6150)	150 g
32e	Carbon Low Alloy Steel (SAE 3140)	150 g
33e	Nickel Steel	150 g
72g	Low Alloy Steel (AISI 4130)	150 g
100b	Manganese Steel	150 g
125b	LA Steel, High Silicon	100 g
129c	LA Steel, High Sulfur (SAE 112)	150 g
131h	Refined Cast Iron	100 g
139b	Chromium-Nickel-Molybdenum Steel	150 g
155	Chromium-Tungsten Steel	150 g
163	Chromium Steel	100 g
179	LA Steel, High Silicon	150 g
291	Cr-Mo Steel (ASTM A-213)	150 g
293	Cr-Ni-Mo Steel (AISI 8620)	150 g
2171	LA Steel, (HSLA 100)	150 g

See [Table 101.2](#) on the website for more information.





## Low Alloy Steels (disk and rod forms)

SRM	Description	Unit of Issue
663	Chromium-Vanadium Steel (Modified)	5 rods
1134	Low-Alloy High-Silicon Steel	disk
1135	LA Steel, High Silicon	disk
1218	LA Steel, High Silicon	disk
1224	LA Steel, Carbon (AISI 1078)	disk
1225	LA Steel (AISI 4130)	disk
1226	LA Steel	disk
1227	LA Steel, Basic Open Hearth, 1 % C	disk
1228	LA Steel, 0.1 % C	disk
1264a	LA Steel, High Carbon (Modified)	disk
1265a	Electrolytic Iron	disk
1269	Line Pipe (AISI 1526 Modified)	disk
1270	LA Steel, Cr-Mo (A336) (F-22)	disk
1271	LA Steel (HSLA-100)	disk
C1285	LA Steel (A242) (Modified)	disk
1286	Low Alloy Steel (HY 80)	disk
1761a	Low Alloy Steel	disk
1762a	Low Alloy Steel	disk
1763b	Low Alloy Steel	disk
1764a	Low Alloy Steel	disk
1765	Low Alloy Steel	disk
1766	Low Alloy Steel	disk
1767	Low Alloy Steel	disk
1768	High-Purity Iron	disk

See [Table 101.8](#) on the website for more information.



## High Alloy Steels (chip form)

SRM	Description	Unit of Issue
126c	High-Nickel Steel (Nominal Mass Fraction 36 % Ni)	150 g
344	15 Chromium-7 Nickel Steel (Mo Precipitation Hardening)	150 g
345b	Fe-Cr-Ni Alloy UNS J92180	150 g
346a	Valve Steel	150 g
862	High-Temperature Alloy L 605	100 g
868	High-Temperature Alloy (Fe-Ni-Co)	100 g

See [Table 101.4](#) on the website for more information.

## High Temperature Alloys (chip and disk forms)

SRM	Description	Unit of Issue
866	Incoloy 800 (chip form)	100 g
867	Ni-Fe-Cr Alloy UNS N08825 (chip form)	100 g
1230	High-Temperature Alloy A286	disk
1246	Incoloy 800	disk
1247	Ni-Fe-Cr Alloy UNS N08825	disk
1250	High-Temperature Alloy Fe-Ni-Co	disk
C2400	Fe-Cr-Ni Alloy UNS J92180	disk

See [Table 101.9](#) on the website for more information.



### Stainless Steels (chip and powder form)

SRM	Description	Unit of Issue
101g	18 Cr-10 Ni Steel (AISI 304L) (powder form)	100 g
123c	Stainless Steel, Cr-Ni-Nb (AISI 348) (chip form)	150 g
133b	Chromium-Molybdenum Steel (chip form)	150 g
160b	Stainless Steel, Cr 18-Ni 12-Mo 2 (AISI 316) (chip form)	150 g
166c	Stainless Steel, Low-Carbon (AISI 316L) (chip form)	100 g
339	17 Chromium-9 Nickel-0.2 Selenium Steel (chip form)	150 g
893	Stainless Steel (SAE 405) (chip form)	150 g
895	Stainless Steel (SAE 201) (chip form)	150 g

See [Table 101.6](#) on the website for more information.

### Stainless Steels (disk form)

SRM	Description	Unit of Issue
C1151a	Stainless Steel, 23Cr-7Ni	disk
C1152a	Stainless Steel, 18Cr-11Ni	disk
C1153a	Stainless Steel, 17Cr-9Ni	disk
C1154a	Stainless Steel, 19Cr-13Ni	disk
1155a	Stainless Steel, Cr 18 Ni 12 Mo 2 (AISI 316)	disk
1171	Stainless Steel, Cr 17-Ni 11-Ti 0.3 (AISI 321)	disk
1172	Stainless Steel, Cr 17-Ni 11-Nb 0.6 (AISI 348)	disk
1219	Stainless Steel, Cr16 - Ni2 (AISI 431) (disk form)	disk
1223	Chromium Steel	disk
1295	Stainless Steel (SAE 405)	disk
C1296	Stainless Steel	disk
1297	Stainless Steel (SAE 201)	disk

See [Table 101.10](#) on the website for more information.

### Tool Steels (chip form)

SRM	Description	Unit of Issue
50c	Tungsten-Chromium-Vanadium Steel	150 g
132b	Tool Steel (AISI M2)	150 g
134a	Molybdenum-Tungsten-Chromium-Vanadium Steel	150 g

See [Table 101.7](#) on the website for more information.

### Specialty Steels (disk form)

SRM	Description	Unit of Issue
1157	Tool Steel (AISI M2)	disk
1158	High-Nickel Steel (Nominal Mass Fraction 36 % Ni)	disk
1772	Tool Steel (S-7)	disk

See [Table 101.11](#) on the website for more information.

### Steelmaking Alloys (powder form)

These SRMs are for checking chemical methods of analysis for major constituents and selected minor elements. They are furnished as fine powders (usually <0.1 mm).

SRM	Description	Unit of Issue
57b	Silicon Metal	40 g
58a	Ferrosilicon (73 % Si Regular Grade)	75 g
59a	Ferrosilicon	50 g
64c	Ferrochromium High Carbon	100 g
68c	High-Carbon Ferromanganese	100 g
90	Ferrophosphorus	75 g
195	Ferrosilicon (75 % Si-High Purity Grade)	75 g
196	Ferrochromium, (Low-Carbon)	100 g
689	Ferrochromium Silicon	100 g

See [Table 101.12](#) on the website for more information.



## Gases in Ferrous Metals (rod and disk forms)

These SRMs are for determining oxygen and nitrogen by vacuum fusion, inert gas fusion, and neutron activation methods.

SRM	Description	Unit of Issue
<b>1089†</b>	Steels, Set (consists of SRMs 1095, 1096, 1097, 1098 and 1099)	5 rods
<b>1090</b>	Oxygen in Ingot Iron	rod
<b>1091a</b>	Oxygen in Stainless Steel (AISI 431)	rod
<b>1093</b>	Oxygen in Valve Steel	rod
<b>1094</b>	Oxygen in Maraging Steel	rod
<b>1754</b>	Low-Alloy Steel, AISI 4320	rod
<b>1755</b>	Nitrogen in Low Alloy Steel	disk

† These SRMs are sold only as a set designated SRM 1089. See [Table 101.5](#) on the website for more information.



## Cast Steels, White Cast Irons, and Ductile Irons (disk and block forms)

These SRMs are for analysis of cast steels and cast irons by rapid instrumental methods.

SRM	Description	Unit of Issue
<b>C1137a</b>	White Cast Iron	disk
<b>1138a</b>	Cast Steel Standard	block
<b>C1145a</b>	White Cast Iron	disk
<b>1173</b>	Ni-Cr-Mo-V Steel	disk
<b>C1173</b>	Cast Steel 3	disk
<b>C1290</b>	High-Alloy White Cast Iron (HC-250+V)	disk
<b>C1291</b>	High-Alloy White Cast Iron (Ni-Hard, Type I)	disk
<b>C1292</b>	High-Alloy White Cast Iron I (Ni-Hard, Type IV)	disk
<b>C2424</b>	Ductile Iron C	disk

See [Table 101.14](#) on the website for more information.

## Cast Irons (chip form)

SRM	Description	Unit of Issue
<b>4l</b>	Cast Iron	150 g
<b>5m</b>	Cast Iron	150 g
<b>6g</b>	Cast Iron	150 g
<b>107c</b>	Cast Iron (Ni-Cr-Mo)	150 g
<b>115a</b>	Copper-Nickel-Chromium Cast Iron	150 g
<b>122i</b>	Cast Iron	150 g
<b>334</b>	Gray Cast Iron	150 g
<b>341</b>	Ductile Cast Iron	150 g
<b>342a</b>	Nodular Cast Iron	150 g
<b>892</b>	High-Alloy White Cast Iron (Ni-Hard, Type IV)	150 g

See [Table 101.13](#) on the website for more information.


# New SRMs/RMs

Check out our SRM website ([www.nist.gov/srm](http://www.nist.gov/srm)) for news regarding SRMs/RMs. This includes information about newly released SRMs, RMs, Renewals and Revisions. It also has links to available resources for questions or ordering SRMs.

**Would you like to add your name to our mailing list to receive updates on New SRMs/RMs ?**

Sign up on our homepage at <https://www.nist.gov/srm> under New SRMs/RMs



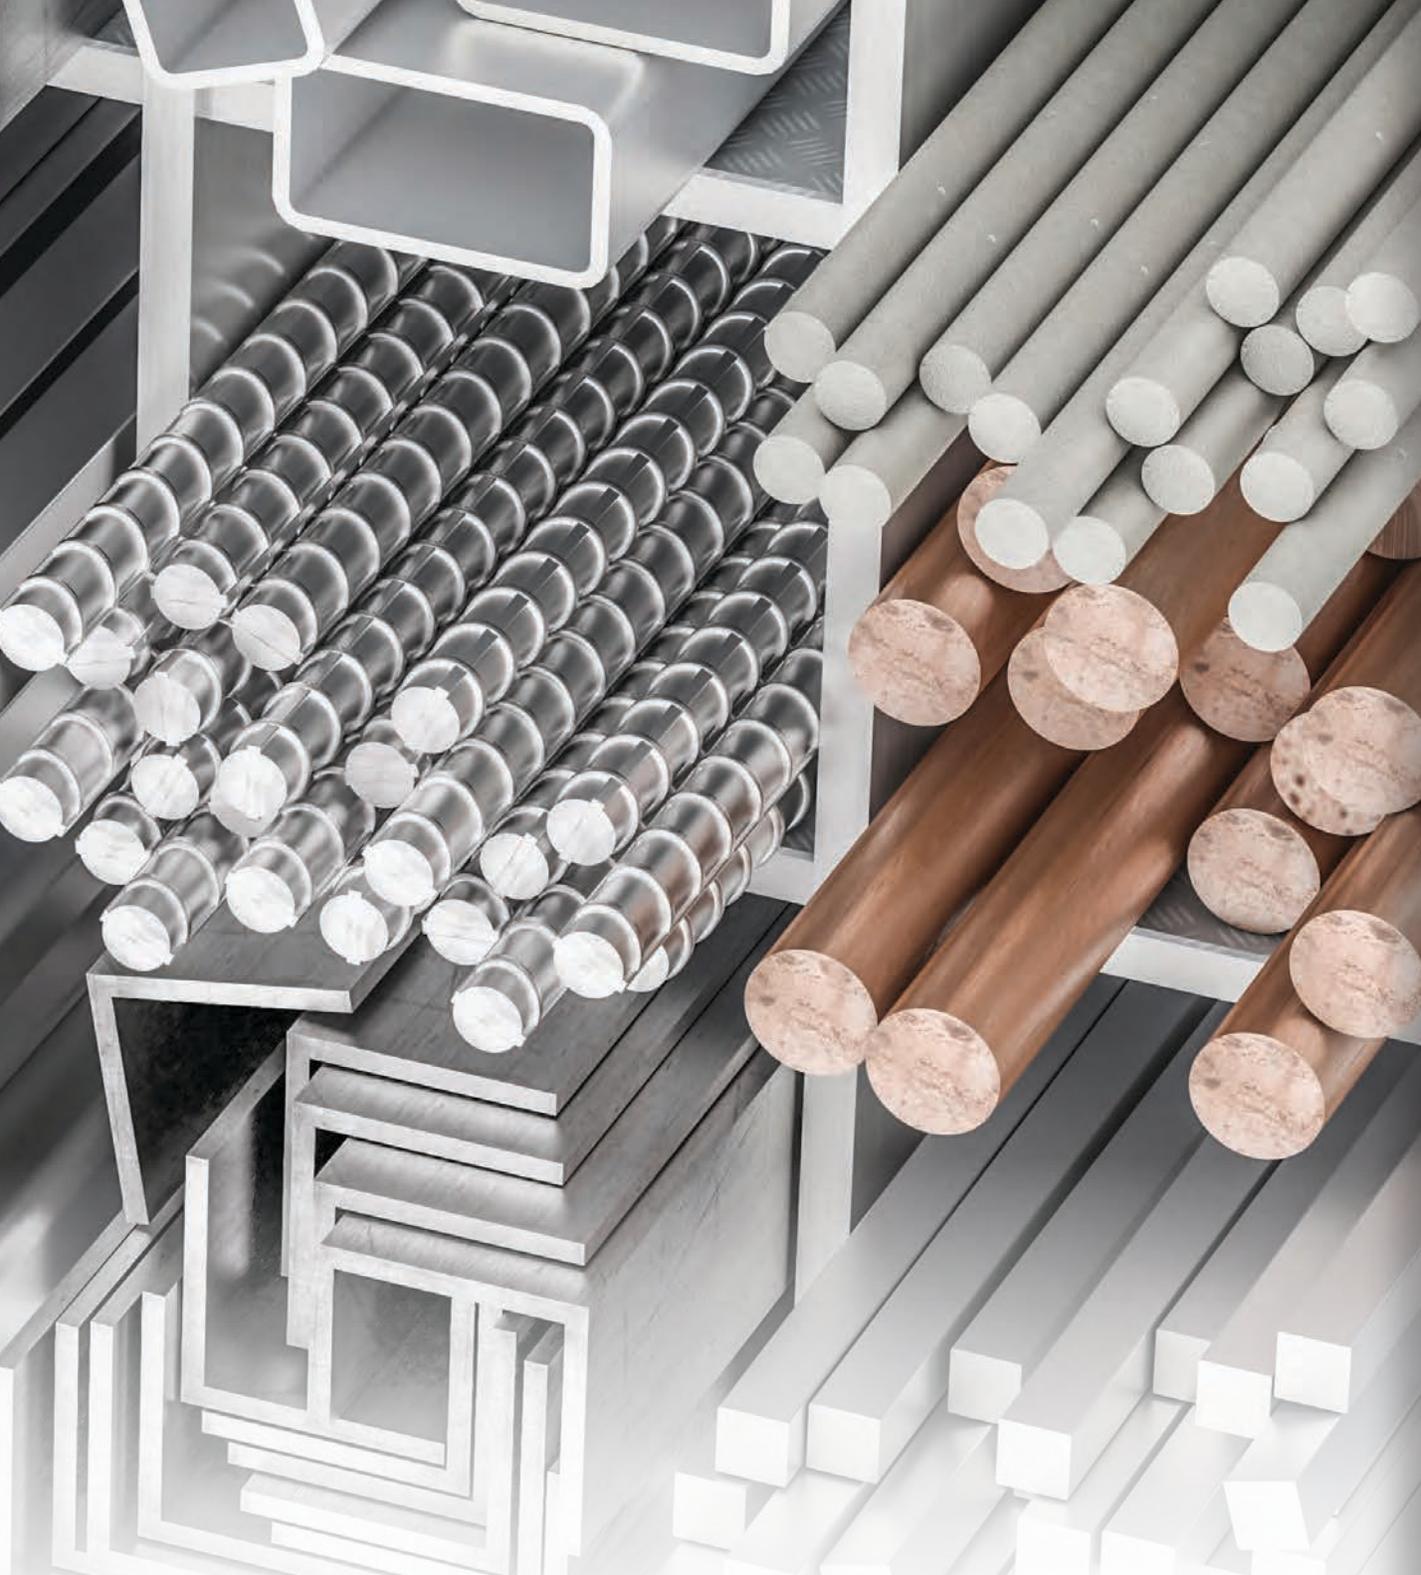

# Standard Reference Materials for Chemical Composition **Nonferrous Metals**

---

These SRMs are intended for optical emission, X-ray fluorescence spectrometric methods, and for other methods of chemical analysis. They consist of alloys selected to provide a wide range of analytical values for elements. They are furnished as chips (small metal turnings), rods, disks, pins or powders from selected portions of commercial ingots. A "C" preceding the SRM number indicates a chill cast sample. Certificates are available on the website with information regarding specific alloy composition.

### Aluminum Base Alloys (chip and disk forms)

These SRMs are intended for analyses of aluminum alloys by chemical and instrumental methods. SRM 1711 is specially prepared to include low levels of cadmium and lead encountered in the analysis of recycled aluminum. SRM 2426 is a hot-dip coating alloy for sheet steel applications.

SRM	Description	Unit of Issue
87a	Silicon-Aluminum Alloy (chip form)	75 g
853a	Aluminum Alloy 3004 (chip form)	40 g
854a	Aluminum Alloy 5182 (chip form)	40 g
855a	Aluminum Casting Alloy 356 (chip form)	30 g
856a	Aluminum Casting Alloy 380 (chip form)	30 g
858	Aluminum Alloy 6011 (chip form)	35 g
1240c	Aluminum Alloy 3004	disk
1241c	Aluminum Alloy 5182	disk
1255b	Aluminum Alloy 356	disk
1256b	Aluminum Alloy 380	disk
1258-I	Aluminum Alloy 6011 (Modified)	disk
1259	Aluminum Alloy 7075	disk
2426	55 % Aluminum-Zinc Alloy	40 g

See [Table 102.1](#) on the website for more information.

### Cobalt Base Alloys (chip and disk forms)

SRM	Description	Unit of Issue
862	High-Temperature Alloy L 605 (chip form)	100 g
1242	High Temperature Alloy L 605	disk
1775	Refractory Alloy MP-35-N	disk
2175	Refractory Alloy MP-35-N (chip form)	150 g

See [Table 102.2](#) on the website for more information.

### Copper Base Alloys (chip, granule and rod forms)

SRM	Description	Unit of Issue
158a	Silicon Bronze (chip form)	150 g
458	Beryllium-Copper (17510) (chip form)	50 g
459	Beryllium-Copper (17200) (chip form)	50 g
460	Beryllium-Copper Alloy (chip form)	50 g
871	Phosphor Bronze (CDA 521) (chip form)	100 g
872	Phosphor Bronze (CDA 544) (chip form)	100 g
874	Cupro-Nickel, 10 % (CDA 706) "HIGH-PURITY" (chip form)	100 g
875	Cupro-Nickel, 10 % (CDA 706) "DOPED" (chip form)	100 g
880	Nickel Silver (CDA 770) (granular form)	100 g
1034	Unalloyed Copper	rod
1035	Leaded-Tin Bronze Alloy (chip form)	50 g

See [Table 102.3](#) on the website for more information.

### Copper "Benchmark" (block, chip and rod forms)

SRMs with a "C" prefix are chill-cast blocks approximately 32 mm square and 19 mm thick.

SRM	Description	Unit of Issue
399	Unalloyed Copper - Cu VI (chip form)	50 g
454	Unalloyed Copper XI (chip form)	35 g
457	Unalloyed Copper IV (solid)	rod
494	Unalloyed Copper I (solid)	rod
495	Unalloyed Copper II (solid)	rod
498	Unalloyed Copper V (solid)	rod
500	Unalloyed Copper - Cu VII	rod
C1251a	Phosphorus Deoxidized Copper - Cu VIII	block
C1252a	Phosphorus Deoxidized Copper - Cu IX	block
C1253a	Phosphorus Deoxidized Copper - Cu X	block

See [Table 102.5](#) on the website for more information.



## Copper Base Alloys (block and disk forms)

The SRMs with a “C” prefix are chill-cast blocks, 31 mm square and 19 mm thick; the others are wrought disks, 31 mm in diameter and 19 mm thick. Both forms have nearly identical elemental compositions.

SRM	Description	Unit of Issue
1107	Naval Brass UNS 46400	disk
1110	Red Brass B	disk
1111	Red Brass Standard	disk
1112	Gilding Metal	disk
1113	Gilding Metal	disk
1114	Gilding Metal	disk
1115	Commercial Bronze Standard for Optical Emission and X-ray Spectroscopic Analysis	disk
C1115	Commercial Bronze A	block
1116	Commercial Bronze Standard for Optical Emission and X-ray Spectroscopic Analysis	disk
1117	Commercial Bronze Standard for Optical Emission and X-ray Spectroscopic Analysis	disk
C1117	Commercial Bronze C	block
1124	Free Cutting Brass (UNS C36000)	disk
C1251a	Phosphorus Deoxidized Copper - Cu VIII	block
C1252a	Phosphorus Deoxidized Copper - Cu IX	block
C1253a	Phosphorus Deoxidized Copper - Cu X	block
1276a	Cupro-Nickel (CDA 715)	disk

See [Table 102.4](#) on the website for more information.

## Lead-Base Alloys (disk and powder forms)

SRMs in the form of disks are approximately 50 mm in diameter and 16 mm thick. They are intended for use with optical emission spectrometric methods of analysis.

SRM	Description	Unit of Issue
53e	Lead-Base Bearing Metal (84Pb-10Sb-6Sn)	150 g
127b	Solder (40Sn-60Pb)	150 g
1129	Solder (63Sn-37Pb)	200 g
1131	Solder (40Sn-60Pb)	disk
1132	Lead-Base Bearing Metal (84Pb-10Sb-6Sn)	disk
C2415a	Battery Lead (UNS 52770)	disk
C2416	Bullet Lead	disk
C2417	Lead-Base Alloy	disk
C2418	High-Purity Lead	disk

See [Table 102.10](#) on the website for more information.

## Nickel Base Alloys (chip, disk and granule forms)

SRM	Description	Unit of Issue
349a	Waspaloy (chip form)	150 g
861	Nickel-based Superalloy PWA 1484 (chip form)	50 g
864	Nickel Alloy UNS N06600 (chip form)	100 g
865	Inconel 625 (chip form)	150 g
882	Nickel-Copper Alloy (65Ni-31Cu-3Al) (chip form)	100 g
897	Tracealloy A (chip form)	35 g
899	Tracealloy C (chip form)	35 g
1159	Electronic and Magnetic Alloy Standard	disk
1160	Electronic and Magnetic Alloy Standard	disk
1243	Ni-Cr-Co Alloy UNS N07001	disk
1244	Nickel Alloy UNS N06600	disk
C1248	Nickel-Copper Alloy	disk
1249	Ni-Cr-Fe-Nb-Mo Alloy UNS N077178	disk
1775	Refractory Alloy MP-35-N	disk
2175	Refractory Alloy MP-35-N (chip form)	150 g
C2402	Hastelloy 7C	disk

See [Table 102.12](#) on the website for more information.



### Tin Base Alloys (powder, block and disk forms)

SRM	Description	Unit of Issue
54d	Bearing Metal (Tin Base) (powder)	75 g
1727	Anode Tin	block
1728	Tin Alloy (Sn-3Cu-0.5Ag)	disk
1729	Tin Alloy (97Sn-3Pb)	disk

See [Table 102.15](#) on the website for more information.

### Titanium Base Alloys (chip and disk forms)

SRM	Description	Unit of Issue
173c	Titanium Alloy UNS R56400 (chip form)	50 g
641	Spectroscopic Titanium-Base Standards Titanium Alloy, 8 Mn (A)	disk
643	Spectroscopic Titanium-Base Standards Titanium Alloy, 8 Mn (C)	disk
647	Titanium Alloy, Al-Mo-Sn-Zr (chip form)	50 g
648	Titanium-Base Alloy 5Al-2Sn-2Zr-4Cr-4Mo (chip form)	50 g
649	Titanium-Base Alloy (15V-3Al-3Cr-3Sn) (chip form)	50 g
654b	Titanium Alloy, Al-V	disk
1128	Titanium-Base Alloy (15V-3Al-3Cr-3Sn)	disk
2061	TiAl(NbW) Alloy for Microanalysis	cube
2431	Titanium-Base Alloy (6Al-2Sn-4Zr-6Mo) (chip form)	50 g
2432	Titanium-Base Alloy (10V-2Fe-3Al) (chip form)	50 g
2433	Titanium-Base Alloy (8Al-1Mo-1V) (chip form)	50 g
2452	Hydrogen In Titanium Alloy (Nominal Mass Fraction 60 mg/kg H) (chip form)	10 g
2453a	Hydrogen In Titanium Alloy (Nominal Mass Fraction 125 mg/kg H) (pin form)	10 g
2454	Hydrogen In Titanium Alloy (Nominal Mass Fraction 200 mg/kg H) (chip form)	10 g

See [Table 102.16](#) on the website for more information.

### Zinc Base Alloys (block, chip and disk forms)

SRM 1738 through 1741 and SRM 2139 are specially prepared alloys primarily intended for use with spectrometric methods of analysis.

SRM	Description	Unit of Issue
625	Spectrographic Zinc-Base Die-Casting Alloy A	block
626	Spectrographic Zinc-Base Die-Casting Alloy B	block
627	Spectrographic Zinc-Base Die-Casting Alloy C	block
628	Spectrographic Zinc-Base Die-Casting Alloy D	block
629	Spectrographic Zinc-Base Die-Casting Alloy E	block
630	Spectrographic Zinc-Base Die-Casting Alloy F	block
631	Spectrographic Zinc Spelter (Modified)	block
1738	Zinc-Aluminum Alloy	disk
1740	Zinc-Aluminum Alloy	disk
1741	Zinc-Aluminum Alloy	disk
2139	Zinc-Aluminum Alloy (chip form)	100 g
2426	55 % Aluminum-Zinc Alloy (chip form)	40 g


See [Table 102.17](#) on the website for more information.

### Zirconium Base Alloy (chip form)

SRM	Description	Unit of Issue
360b	Zirconium (Sn-Fe-Cr) Alloy	100 g

See [Table 102.18](#) on the website for more information.



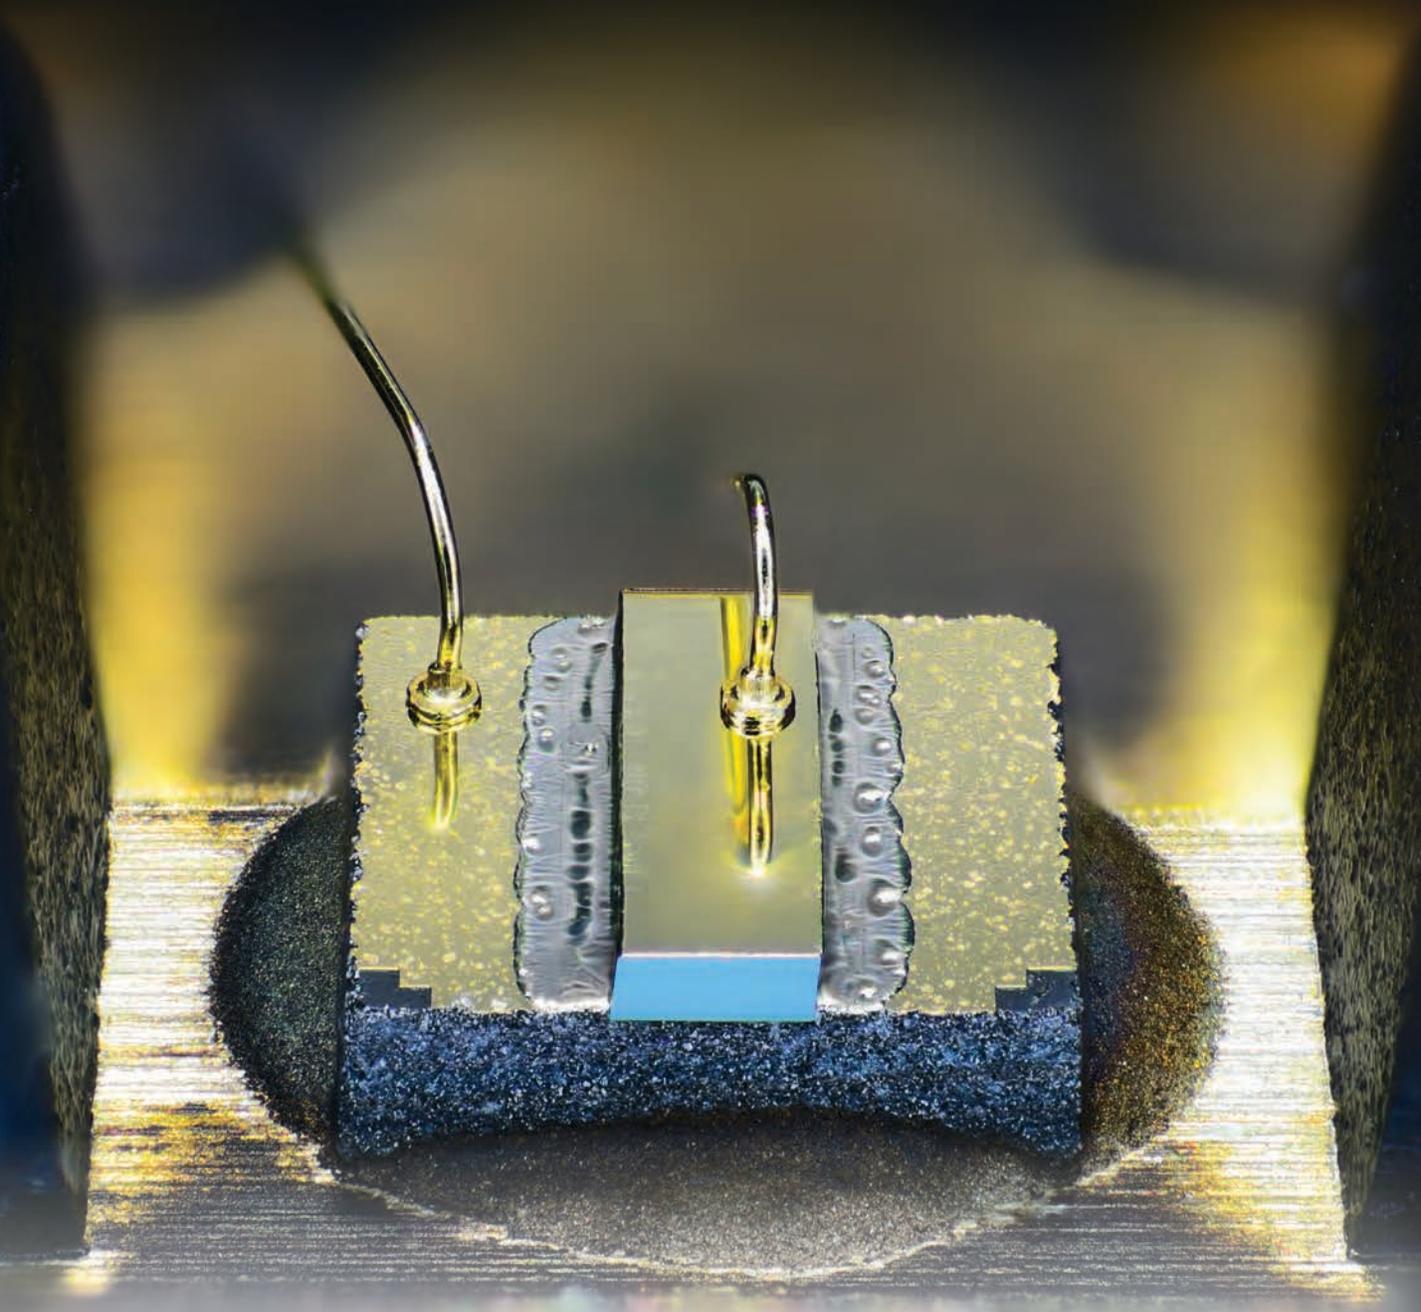

# Standard Reference Materials for Chemical Composition **Microanalysis**

### Metals (wire, disk and cube forms)

SRM	Description	Unit of Issue
480	Tungsten 20 % - Molybdenum Alloy Electron Microprobe Standard	disk
481	Gold-Silver Wires for Microprobe Analysis	set (6)
482	Gold-Copper Wires for Microprobe Analysis	set (6)
2061	TiAl(NbW) Alloy for Microanalysis	cube

See [Table 103.1](#) on the website for more information.

### Synthetic Glass for Microanalysis (microsphere form)

The glass SRM listed below is suitable for microanalysis, such as electron microprobe analysis (EMPA), secondary ion mass spectrometry (SIMS) and other methods that require high homogeneity.

SRM	Description	Unit of Issue
2066	K-411 Glass Microspheres	50 mg

See [Table 103.2](#) on the website for more information.

### Semiconductor Thin Film for the Composition of Thin Films

SRMs 2841 and 2842 are intended for use as a reference standard for analytical methods that measure the composition of thin films, such as electron microprobe analysis (EMPA), photoluminescence (PL), auger electron spectroscopy (AES) and X-ray photoelectron spectroscopy (XPS). The SRM consists of an epitaxial layer of Al<sub>x</sub>Ga<sub>1-x</sub>As, 3μm thick, on a 1 cm x 1 cm square of GaAs substrate. The semiconductor chip is attached with carbon tape to a 2.5 cm diameter stainless steel disk for labeling and handling.


SRM	Description	Unit of Issue
2841	Semiconductor Thin Film: Al <sub>x</sub> Ga <sub>1-x</sub> As Epitaxial Layers (Al mole fraction $x$ near 0.20)	disk
2842	Semiconductor Thin Film: Al <sub>x</sub> Ga <sub>1-x</sub> As Epitaxial Layers (Al mole fraction $x$ near 0.30)	disk

See [Table 103.4](#) on the website for more information.

### Nanomaterials: Composition

SRM	Description	Unit of Issue
2483	Single-Wall Carbon Nanotubes (Raw Soot)	250 mg

See [Table 103.5](#) on the website for more information.

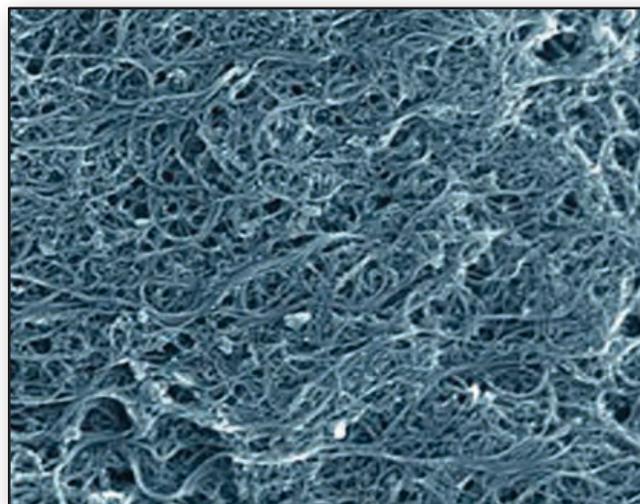

Scanning Electron Microscopy Image of SRM 2483



# Standard Reference Materials for Chemical Composition

## **High-Purity Materials**

### High Purity Metals (solid forms)

These SRMs are for determining impurity elements in high purity metals.

SRM	Description	Unit of Issue
682	High-Purity Zinc	block
683	Zinc Metal	block
728	Intermediate-Purity Zinc (pellet form)	450 g
885	Refined Copper (pin form)	200 g

See [Table 104.1](#) on the website for more information.

### Stoichiometry (powder form)

These SRMs are defined as primary, working, and secondary standards in accordance with recommendations of the Analytical Chemistry Section of the International Union of Pure and Applied Chemistry [Ref. Analyst 90, 251 (1965)]. These definitions are as follows:

#### Primary Standard:

A commercially available substance of purity  $100\% \pm 0.02\%$  (Purity 99.98+ %).

#### Working Standard:

A commercially available substance of purity  $100\% \pm 0.05\%$  (Purity 99.95+ %).

#### Secondary Standard:

A substance of lower purity which can be standardized against a primary grade standard.

SRM	Description	Unit of Issue
17f	Sucrose Optical Rotation	60 g
84I	Potassium Hydrogen Phthalate	60 g
136f	Potassium Dichromate, (Oxidimetric Standard)	60 g
350c	Benzoic Acid Acidimetric Standard	30 g
351a	Sodium Carbonate	50 g
723e	Tris Acidimetric	50 g
917c	D-Glucose (Dextrose)	50 g
973	Boric Acid Acidimetric Standard	100 g
999c	Potassium Chloride Primary Standard (Dried at 500 °C)	30 g
8040	Sodium Oxalate (Na <sub>2</sub> C <sub>2</sub> O <sub>4</sub> ) Reductometric Standard	60 g

See [Table 104.3](#) on the website for more information.

### Microchemistry (powder form)

SRM	Description	Unit of Issue
141e	Acetanilide	2 g
143d	Cystine (L-Cystine)	2 g
2141	Urea	2 g
2143	p-Fluorobenzoic Acid	2 g
2144	m-Chlorobenzoic Acid	2 g

See [Table 104.4](#) on the website for more information.

### Spectrometry, Single Element Standard Solutions

These SRMs are intended as the primary calibration standards for the quantitative determinations of a single element, typically using inductively coupled plasma optical emission spectrometry and/or inductively coupled plasma mass spectrometry. They can also be used in conjunction with any other analytical technique or procedure where standard solutions are required. The SRM is a single-element solution of 50 mL with a nominal concentration of 10 mg/g and is provided as either a single high-density polyethylene bottle or in 5 x 10 mL borosilicate glass ampoules. Solutions may contain a nominal amount of acid, such as 10 % Nitric acid or 10 % Hydrochloric acid.

SRM	Description	Unit of Issue
3101a	Aluminum (Al) Standard Solution	5 x 10 mL
3102a	Antimony (Sb) Standard Solution	50 mL
3103a	Arsenic (As) Standard Solution	5 x 10 mL
3104a	Barium (Ba) Standard Solution	50 mL
3105a	Beryllium (Be) Standard Solution	5 x 10 mL
3106	Bismuth (Bi) Standard Solution	5 x 10 mL
3107	Boron (B) Standard Solution	50 mL
3108	Cadmium (Cd) Standard Solution	5 x 10 mL
3109a	Calcium (Ca) Standard Solution	5 x 10 mL
3110	Cerium (Ce) Standard Solution	5 x 10 mL
3111a	Cesium (Cs) Standard Solution	5 x 10 mL
3112a	Chromium (Cr) Standard Solution	5 x 10 mL
3113	Cobalt (Co) Standard Solution	5 x 10 mL
3114	Copper (Cu) Standard Solution	50 mL
3115a	Dysprosium (Dy) Standard Solution	5 x 10 mL
3116a	Erbium (Er) Standard Solution	5 x 10 mL



SRM	Description	Unit of Issue
3117a	Europium (Eu) Standard Solution	5 x 10 mL
3118a	Gadolinium (Gd) Standard Solution	5 x 10 mL
3119a	Gallium (Ga) Standard Solution	5 x 10 mL
3120a	Germanium (Ge) Standard Solution	50 mL
3121	Gold (Au) Standard Solution	5 x 10 mL
3122	Hafnium (Hf) Standard Solution	50 mL
3123a	Holmium (Ho) Standard Solution	5 x 10 mL
3124a	Indium (In) Standard Solution	5 x 10 mL
3126a	Iron (Fe) Standard Solution	5 x 10 mL
3127a	Lanthanum (La) Standard Solution	5 x 10 mL
3128	Lead (Pb) Standard Solution	5 x 10 mL
3129a	Lithium (Li) Standard Solution	5 x 10 mL
3130a	Lutetium (Lu) Standard Solution	5 x 10 mL
3131a	Magnesium (Mg) Standard Solution	5 x 10 mL
3132	Manganese (Mn) Standard Solution	5 x 10 mL
3133	Mercury (Hg) Standard Solution	5 x 10 mL
3134	Molybdenum (Mo) Standard Solution	5 x 10 mL
3135a	Neodymium (Nd) Standard Solution	5 x 10 mL
3136	Nickel (Ni) Standard Solution	5 x 10 mL
3137	Niobium (Nb) Standard Solution	50 mL
3138	Palladium (Pd) Standard Solution	5 x 10 mL
3139a	Phosphorus (P) Standard Solution	5 x 10 mL
3140	Platinum (Pt) Standard Solution	5 x 10 mL
3141a	Potassium (K) Standard Solution	5 x 10 mL
3142a	Praseodymium (Pr) Standard Solution	5 x 10 mL
3143	Rhenium (Re) Standard Solution	5 x 10 mL
3144	Rhodium (Rh) Standard Solution	5 x 10 mL
3145a	Rubidium (Rb) Standard Solution	5 x 10 mL

SRM	Description	Unit of Issue
3147a	Samarium (Sm) Standard Solution	5 x 10 mL
3148a	Scandium (Sc) Standard Solution	5 x 10 mL
3149	Selenium (Se) Standard Solution	5 x 10 mL
3150	Silicon (Si) Standard Solution	50 mL
3151	Silver (Ag) Standard Solution	5 x 10 mL
3152a	Sodium (Na) Standard Solution	50 mL
3153a	Strontium (Sr) Standard Solution	5 x 10 mL
3154	Sulfur (S) Standard Solution	5 x 10 mL
3155	Tantalum (Ta) Standard Solution	50 mL
3156	Tellurium (Te) Standard Solution	5 x 10 mL
3157a	Terbium (Tb) Standard Solution	5 x 10 ml
3158	Thallium (Tl) Standard Solution	5 x 10 mL
3160a	Thulium (Tm) Standard Solution	5 x 10 mL
3161a	Tin (Sn) Standard Solution	50 mL
3162a	Titanium (Ti) Standard Solution	50 mL
3163	Tungsten (W) Standard Solution	50 mL
3164	Uranium (U) Standard Solution (Radioactive)	5 x 10 mL
3165	Vanadium (V) Standard Solution	5 x 10 mL
3166a	Ytterbium (Yb) Standard Solution	5 x 10 mL
3167a	Yttrium (Y) Standard Solution	5 x 10 mL
3168a	Zinc (Zn) Standard Solution	5 x 10 mL
3169	Zirconium (Zr) Standard Solution	50 mL
3177	Mercuric Chloride Standard Solution	5 x 10 mL

See [Table 104.5](#) on the website for more information.



### Arsenic Species Standard Solutions

These SRMs are intended as calibration standards to provide SI traceability in the measurement of total arsenic and arsenic species in food and clinical samples.

SRM	Description	Unit of Issue
3030	Monomethylarsonic Acid Standard Solution	2 x 5 mL
3031	Dimethylarsinic Acid Standard Solution	2 x 5 mL
3033	Arsenobetaine Standard Solution	2 x 5 mL
3034	Arsenocholine Standard Solution	2 x 5 mL
3036	Arsenic Acid (AsV) Standard Solution	2 x 10 mL
3037	Arsenous Acid (AsIII) Standard Solution	2 x 10 mL
3103a	Arsenic (As) Standard Solution	5 x 10 mL

See [Table 104.6](#) on the website for more information.

### Anion Chromatography (solution form)

These SRMs are single component solutions prepared gravimetrically for use in anion chromatography or any other technique that requires aqueous standard solutions for calibration or control materials.

SRM	Description	Unit of Issue
3180	Iodide Anion (I <sup>-</sup> ) Standard Solution	5 x 5 mL
3181	Sulfate Anion (SO <sub>4</sub> <sup>2-</sup> ) Standard Solution	5 x 10 mL
3182	Chloride Anion (Cl <sup>-</sup> ) Standard Solution	5 x 10 mL
3183	Fluoride Anion (F <sup>-</sup> ) Standard Solution	50 mL
3184	Bromide Anion (Br <sup>-</sup> ) Standard Solution	5 x 10 mL
3185	Nitrate Anion (NO <sub>3</sub> <sup>-</sup> ) Standard Solution	5 x 10 mL
3186	Phosphate Anion (PO <sub>4</sub> <sup>3-</sup> ) Standard Solution	5 x 10 mL

See [Table 104.8](#) on the website for more information.

### Stable Isotopic Materials (solid and solution forms)

The isotopic composition of these SRMs has been determined by mass spectrometry.

For light stable isotopic materials value assigned on an artifact based scale, see Light Stable Isotopic Materials.

SRM	Description	Unit of Issue
951a	Boric Acid Isotopic Standard	10 g
952	Enriched Boric Acid Standard	0.25 g
973	Boric Acid Acidimetric Standard	100 g
975a	Isotopic Standard for Chlorine	0.25 g
977	Isotopic Standard for Bromine	0.25 g
978a	Assay-Isotopic Standard for Silver	0.25 g
979	Chromium Isotopic Standard	0.25 g
980	Isotopic Standard for Magnesium	0.25 g
981	Common Lead Isotopic Standard (wire)	1 g
982	Equal-Atom Lead Isotopic Standard (wire)	1 g
983	Radiogenic Lead Isotopic Standard (wire)	1 g
984	Rubidium Chloride	0.25 g
986	Isotopic Standard for Nickel	0.5 g
987	Strontium Carbonate Isotopic Standard	1 g
994	Isotopic Standard for Gallium	0.25 g
997	Thallium Isotopic Standard	0.25 g
3230	Iodine-129 Isotopic Standard (Low Level)	5 x 5 mL
3231	Iodine-129 Isotopic Standard (High Level)	5 x 5 mL
8599	Henderson Molybdenite	10 g

See [Table 104.9](#) on the website for more information.





### Light Stable Isotopic Materials (gas, liquid and solid forms)

These RMs are for calibration of isotope-ratio mass spectrometers and associated sample preparation systems. They are distributed by NIST on behalf of the International Atomic Energy Agency (IAEA). At the request of the IAEA, quantities of these materials are limited to one unit of each RM per laboratory every 3 years.

The isotopic compositions are given in parts per thousand difference from isotope-ratio standards - Hydrogen and Oxygen: Vienna Standard Mean Ocean Water (VSMOW), Carbon: Vienna PeeDee Belemnite (VPDB), Nitrogen: atmospheric N<sub>2</sub> (Air), Silicon: NBS28 Silica Sand (optical), and Sulfur: Vienna Canyon Diablo Troilite (VCDT). RM 8545 (LSVEC) is also expressed as an absolute isotopic ratio.

SRM	Description	Unit of Issue
8529	IAEA-S-3 (Sulfur Isotopes in Silver Sulfide)	1 x 0.5 g
8535a	VSMOW2 Vienna Standard Mean Ocean Water (Hydrogen and Oxygen Isotopes in Water)	20 mL
8536	GISP-Water	20 mL
8537	SLAP-Water Light Stable Isotopic Standard	20 mL
8539	NBS22 Oil (Carbon and Hydrogen Isotopes in Oil)	1 mL
8540	IAEA-CH-7 (Carbon and Hydrogen Isotopes in Polyethylene Foil)	3.5 g
8541	USGS24 Graphite (Carbon Isotopes in Graphite)	0.8 g
8542	IAEA-CH-6 Sucrose (Carbon Isotopes in Sucrose)	1 g
8544	NBS 19 Limestone (Carbon and Oxygen Isotopes in Carbonate)	0.4 g
8545	LSVEC (Carbon, Oxygen, and Lithium Isotopes in Lithium Carbonate)	0.4 g
8546	NBS28 (Silicon and Oxygen Isotopes in Silica Sand)	0.4 g

SRM	Description	Unit of Issue
8547	IAEA-N-1 (Nitrogen Isotopes in Ammonium Sulfate)	0.4 g
8548	IAEA-N-2 (Nitrogen Isotopes in Ammonium Sulfate)	0.4 g
8550	USGS25 (Nitrogen Isotopes in Ammonium Sulfate)	0.5 g
8551	USGS26 (Nitrogen Isotopes in Ammonium Sulfate)	0.5 g
8552	NSVEC (Nitrogen Isotopes in Gaseous Nitrogen)	300 μmol
8553	IAEA-S-4 (Sulfur Isotopes in Elemental Sulfur)	0.5 g
8554	IAEA-S-1 (Sulfur Isotopes in Silver Sulfide)	0.5 g
8555	IAEA-S-2 (Sulfur Isotopes in Silver Sulfide)	0.5 g
8556	NBS123 (Sulfur Isotopes in Sphalerite)	1.5 g
8557	NBS127 (Sulfur and Oxygen Isotopes in Barium Sulfate)	0.5 g
8558	USGS32 (Nitrogen and Oxygen Isotopes in Nitrate)	0.9 g
8562	CO <sub>2</sub> -Heavy, Paleomarine Origin (Carbon Dioxide)	set (2)
8563	CO <sub>2</sub> -Light, Petrochemical Origin (Carbon Dioxide)	set (2)
8564	CO <sub>2</sub> -Biogenic, Modern Biomass Origin (Carbon Dioxide)	set (2)
8568	USGS34 (Nitrogen and Oxygen Isotopes in Nitrate)	0.9 g
8569	USGS35 (Nitrogen and Oxygen Isotopes in Nitrate)	0.9 g
8574	L-glutamic Acid USGS41 (Heavy Carbon and Nitrogen Isotopes in L-glutamic Acid)	0.5 g

See [Table 104.10](#) on the website for more information.

# NIST 2021 SRM EXHIBIT SCHEDULE

## **AACC Annual Scientific Meeting & Clinical Lab Exposition**

*July 25 - 29, 2021*

**Anaheim Convention Center**

Anaheim, CA

## **AOAC 135th Annual Meeting & Exposition**

*August 27 - September 2, 2021*

**Sheraton Boston Hotel**

Boston, MA





# Standard Reference Materials for Chemical Composition

## Health & Industrial Hygiene

### Clinical Laboratory Materials (liquid and solid forms)

The following SRMs are for calibrating apparatus and validating analytical methods used in clinical and pathology laboratories. Additional information on the serum materials is given in Table 105.2 Serum and Plasma Materials.

SRM	Description	Unit of Issue
909c	Frozen Human Serum	3 x 2 mL
911c	Cholesterol	2 g
912b	Urea-Clinical	25 g
913b	Uric Acid	10 g
914b	Creatinine	10 g
915b	Calcium Carbonate (Clinical Standard)	20 g
916a	Bilirubin	100 mg
917c	D-Glucose (Dextrose)	50 g
918c	Potassium Chloride (Clinical)	30 g
919b	Sodium Chloride (Clinical)	30 g
920	D-Mannitol	50 g
921a	Cortisol (Hydrocortisone)	1 g
924a	Lithium Carbonate	30 g
927e	Bovine Serum Albumin (7 %, solution) (Total Protein Solution)	10 x 2.2 mL
928	Lead Nitrate (Clinical)	30 g
929a	Magnesium Gluconate	5 g
937	Iron Metal (Clinical Standard)	50 g
955d	Toxic Metals and Metabolites in Frozen Human Blood	set (6)
956d	Electrolytes in Frozen Human Serum	set (6)
965b	Glucose in Frozen Human Serum	set (8)
967a	Creatinine in Frozen Human Serum	set (4)
968f	Fat-Soluble Vitamins in Frozen Human Serum	set (2)
971a	Hormones in Frozen Human Serum	set (2)
972a	Vitamin D Metabolites in Frozen Human Serum	set (4)
998	Angiotensin I (Human)	0.5 mg
1400	Bone Ash	50 g
1401	Trace Metals in Frozen Human Blood	set (4)
1486	Bone Meal	50 g
1595	Tripalmitin	2 g
1598a	Inorganic Constituents in Animal Serum	2 vials
1949	Frozen Human Prenatal Serum	set (8)
1950	Metabolites in Frozen Human Plasma	5 x 1 mL

SRM	Description	Unit of Issue
1951c	Lipids in Frozen Human Serum	set (4)
1955	Homocysteine and Folate in Frozen Human Serum	set (3)
2365	BK Virus DNA Quantitative Standard	110 µL
2366a	Cytomegalovirus DNA (Towne <sub>Δ147</sub> BAC) for DNA Measurements	150 µL
2378	Fatty Acids in Frozen Human Serum	set (3)
2389a	Amino Acids in 0.1 mol/L Hydrochloric Acid	5 x 1.2 mL
2668	Toxic Elements in Frozen Human Urine	set (10)
2669	Arsenic Species in Frozen Human Urine	set (10)
2921	Human Cardiac Troponin Complex	5 x 115 µL
2924	C-Reactive Protein Solution	3 x 1 mL
2925	Recombinant Human Serum Albumin Solution (Primary Reference Calibrator for Urine Albumin) (Frozen)	2 x 0.5 mL
2971	24R, 25-Dihydroxyvitamin D3 Calibration Solution	5 x 1 mL
2972a	25-Hydroxyvitamin D Calibration Solutions	set (20)
2973	Vitamin D Metabolites in Frozen Human Serum (High Level)	2 x 1 mL
3030	Monomethylarsonic Acid Standard Solution	2 x 5 mL
3031	Dimethylarsinic Acid Standard Solution	2 x 5 mL
3033	Arsenobetaine Standard Solution	2 x 5 mL
3034	Arsenocholine Standard Solution	2 x 5 mL
3036	Arsenic Acid (AsV) Standard Solution	2 x 10 mL
3037	Arsenous Acid (AsIII) Standard Solution	2 x 10 mL
3667	Creatinine in Frozen Human Urine	10 mL
3668	Mercury, Perchlorate, and Iodide in Frozen Human Urine	set (10)
3669	Arsenic Species in Frozen Human Urine (Elevated Levels)	5 x 1.5 mL
3671	Nicotine Metabolites in Human Urine (Frozen)	set (3)
3672	Organic Contaminants in Smokers' Urine (Frozen)	5 x 10 mL
3673	Organic Contaminants in Non-Smokers' Urine (Frozen)	5 x 10 mL
3949	Folate Vitamers in Frozen Human Serum	set (3)
3950	Vitamin B <sub>6</sub> in Frozen Human Serum	set (2)
8321	Peptide Mixture of Proteomics	3 x 50 µL
8323	Yeast Protein Extract	3 x 0.2 mL
8642a	FDA Saxitoxin Dihydrochloride Solution	5 x 1.2 mL

See [Table 105.1](#) on the website for more information.



### Serum and Plasma Materials (frozen, liquid, and lyophilized forms)

These SRMs serve a variety of clinical measurement needs.

SRMs 1957 and 1958 are freeze-dried human sera for evaluating PCB congeners, chlorinated pesticides, and PBDE congeners with non-certified values for PFCs and dioxins and furans.

SRM	Description	Unit of Issue
909c	Frozen Human Serum	3 x 2 mL
927e	Bovine Serum Albumin (7 %, solution) (Total Protein Solution)	10 x 2.2 mL
956d	Electrolytes in Frozen Human Serum	6 x 2 mL
965b	Glucose in Frozen Human Serum	set (8)
967a	Creatinine in Frozen Human Serum	set (4)
968f	Fat-Soluble Vitamins, Carotenoids, and Cholesterol in Human Serum	set (3)
971a	Hormones in Frozen Human Serum	2 x 2 mL
972a	Vitamin D Metabolites in Frozen Human Serum	4 x 1 mL
1949	Frozen Human Prenatal Serum	8 x 1.8 mL
1950	Metabolites in Human Plasma	5 x 1 mL
1951c	Lipids in Frozen Human Serum	4 x 1 mL
1955	Homocysteine and Folate in Frozen Human Serum	set (3)
1957	Organic Contaminants in Non-Fortified Human Serum	5
1958	Organic Contaminants in Fortified Human Serum	5
2378	Fatty Acids in Frozen Human Serum	3 x 1 mL
2921	Human Cardiac Troponin Complex	5 x 115 µL
2925	Recombinant Human Serum Albumin Solution (Primary Reference Calibrator for Urine Albumin) (Frozen)	2 x 0.5 mL
2973	Vitamin D Metabolites in Frozen Human Serum (High Level)	2 x 1 mL
3667	Creatinine in Frozen Human Urine	10 mL
3949	Folate Vitamers in Frozen Human Serum	3 x 1 mL
3950	Vitamin B <sub>6</sub> in Frozen Human Serum	2 x 1 mL

See [Table 105.2](#) on the website for more information.

### Ethanol Solutions

These SRMs are for use in the calibration of instruments and techniques for the determination of ethanol (ethyl alcohol) in breath and blood. SRM 1828c consists of six concentrations of ethanol-water solutions in ampoules.

SRM	Description	Unit of Issue
1828c	Ethanol-Water Solutions (Nominal Mass Fractions of 0.02 %, 0.04 %, 0.08 %, 0.1 %, 0.2 %, and 0.3 %,)	6 x 1.2 mL
2891	Ethanol-Water Solution (Nominal Mass Fraction 0.02 %)	5 x 1.2 mL
2892	Ethanol-Water Solution (Nominal Mass Fraction 0.04 %)	5 x 1.2 mL
2893a	Ethanol-Water Solution (Nominal Mass Fraction 0.08 %)	5 x 1.2 mL
2894	Ethanol-Water Solution (Nominal Mass Fraction 0.1 %)	5 x 1.2 mL
2895	Ethanol-Water Solution (Nominal Mass Fraction 0.2 %)	5 x 1.2 mL
2896	Ethanol-Water Solution (Nominal Mass Fraction 0.3 %)	5 x 1.2 mL
2897a	Ethanol Water Solution (Nominal Mass Fraction 2 %)	5 x 10 mL
2898a	Ethanol Water Solution (Nominal Mass Fraction 6 %)	5 x 10 mL
2899a	Ethanol-Water Solution (Nominal Mass Fraction 25 %)	5 x 10 mL
2900	Ethanol-Water Solution (Nominal Mass Fraction 95.6 %)	5 x 10 mL

See [Table 105.3](#) on the website for more information.

### Toxic Substances in Urine (frozen form)

SRM	Description	Unit of Issue
2668	Toxic Elements in Frozen Human Urine	set (10)
2669	Arsenic Species in Frozen Human Urine	set (10)
3668	Mercury, Perchlorate, and Iodide in Frozen Human Urine	set (10)
3669	Arsenic Species in Frozen Human Urine (Elevated Levels)	set (5)

See [Table 105.4](#) on the website for more information.

### Drugs of Abuse, Smoking Metabolites and Contaminates (urine)

SRM	Description	Unit of Issue
1507b	11-Nor-Delta-9-Tetrahydrocannabinol-9-Carboxylic Acid in Freeze-Dried Urine	set (3)
2926	Recombinant Human Insulin-like Growth Factor 1 (Frozen)	3 x 0.25 mL
2927	<sup>15</sup> N-Labeled Recombinant Human Insulin-like Growth Factor 1 (Frozen)	3 x 50 µL
3671	Nicotine Metabolites in Human Urine (Frozen)	3 x 10 mL
3672	Organic Contaminants in Smokers' Urine (Frozen)	5 x 10 mL
3673	Organic Contaminants in Non-Smokers' Urine (Frozen)	5 x 10 mL

See [Table 105.7](#) on the website for more information.

### Respirable Materials on Filter Media

These SRMs enable the determination of hazardous materials potentially found in industrial environments. SRMs 2676d, 2677a, and 3087a have been superseded by SRM 2783 Air Particulate on Filter Media.

SRM	Description	Unit of Issue
2783	Air Particulate on Filter Media (47 mm dia)	2 filters plus 2 blanks
2950a	Respirable Alpha Quartz on Filter Media (Nominal Mass of Alpha Quartz: 5 µg - 500 µg)	35 filters plus 35 blanks
2960	Respirable Cristobalite on Filter Media (Nominal Mass of Cristobalite: 5 µg - 250 µg)	30 filters plus 30 blanks
8785	Air Particulate Matter on Filter Media	3 filters
8786	Filter Blank for RM 8785	1 filter

See [Table 105.10](#) on the website for more information.



### Biomaterials (solid forms)

Biomaterials are found in medical devices that are in intimate contact with tissues and body fluids.

SRM	Description	Unit of Issue
2910b	Hydroxyapatite	2 g
8011	Gold Nanoparticles, Nominal 10 nm Diameter	2 x 5 mL
8012	Gold Nanoparticles, Nominal 30 nm Diameter	2 x 5 mL
8013	Gold Nanoparticles, Nominal 60 nm Diameter	2 x 5 mL

See [Table 105.9](#) on the website for more information.

### Respirable Materials

SRMs 1878b and 1879b are crystalline silica materials with particle size in the respirable range. They are intended for use in determining, by x-ray diffraction, the levels of respirable silica in an industrial atmosphere according to National Institute for Occupational Safety and Health (NIOSH) Analytical Method 7500 or equivalent methods.

SRM	Description	Unit of Issue
1648a	Urban Particulate Matter	2 g
1649b	Urban Dust	2 g
1650b	Diesel Particulate Matter	200 mg
1866b	Common Commercial Asbestos	set (3)
1877	Beryllium Oxide Powder	20 g
1878b	Respirable Alpha Quartz (Quantitative X-Ray Powder Diffraction Standard)	5 g
1879b	Respirable Cristobalite (Quantitative X-Ray Powder Diffraction Standard)	5 g
1975	Diesel Particulate Extract	4 x 1.2 mL
2583	Trace Elements in Indoor Dust (Nominal Mass Fraction of 90 mg/kg Lead)	8 g
2584	Trace Elements in Indoor Dust (Nominal Mass Fraction of 1% Lead)	8 g
2585	Organic Contaminants in House Dust	10 g
2786	Fine Atmospheric Particulate Matter (Mean Particle Diameter < 4 µm)	100 mg
2787	Fine Atmospheric Particulate Matter (Mean Particle Diameter < 10 µm)	100 mg
2975	Diesel Particulate Matter	1 g

See [Table 105.12](#) on the website for more information.



## DNA Profiling, Nucleic Acid Materials and Monoclonal Antibody

SRM 2374 is intended for use as a template for ribonucleic acid (RNA) control synthesis using in vitro transcription (IVT). These RNA controls are designed to be used as external, or “spike-in”, controls to support confidence in gene expression assays by providing quantitative assessment of the technical performance of a gene expression measurement. A unit of the SRM contains 96 different 0.5 mL polypropylene tubes, with approximately 10 µg of dehydrated plasmid deoxyribonucleic acid (DNA) in each tube. Depending on the strand transcribed, the controls will mimic either “sense” or “anti-sense” eukaryotic messenger RNA (mRNA).

SRM 2391c is intended for use in the standardization of forensic and paternity quality assurance procedures, and instructional law enforcement or non-clinical research purposes. SRM 2391d includes short tandem repeat (STR) information for all genomic DNA samples in the SRM. The STR data includes the Federal Bureau of Investigation’s (FBI’s) CODIS (Combined DNA Index System) core STR loci and other loci that were commercially available at the time of certification. Certified values for a total of 54 STR loci plus Amelogenin, 29 of which are Y-STRs, Reference values for 26 STR loci, and Information values for 1 STR locus, 12 X-STR loci, and 30 Insertion/Deletions (Indels) are included in this issue. The new standard includes well-characterized DNA in two forms: genomic DNA and DNA to be extracted from cells spotted onto 903 and FTA filter papers. SRM 2391c consists of 5 components packaged in one box and stored at refrigeration temperatures (NOT frozen).

SRM 2392 is intended to provide quality control when performing the polymerase chain reaction (PCR) and sequencing of human mitochondrial DNA (mtDNA) for forensic identifications, medical diagnosis, or mutation detection. It may also be used as a control when amplifying (PCR) and sequencing any DNA. SRM 2392 Mitochondrial DNA Sequencing contains DNA extracted from two cell lines plus cloned DNA from a region that is difficult to sequence. The certificate accompanying the SRM details the base pair sequences of the DNA, and the sequences of 58 unique primer sets which permit the amplification and sequencing of any specific area or the entire human mitochondrial DNA (strand). SRM 2392 consists of three frozen components packaged in one box. For further information see: SP260-155.

SRM 2392-1 Mitochondrial DNA Sequencing compliments and adds another DNA template to SRM 2392 for the amplification and sequencing of human mtDNA. The selection of the HL-60 cell culture line for this additional DNA template was based on a suggestion from the Federal Bureau of Investigation (FBI) that this DNA would be particularly useful to the forensic community. For further information see: SP260-155.

RMs 8375, 8391, 8392, 8393, and 8398 are intended for assessing performance of human genome sequencing, including whole genome sequencing, whole exome sequencing, and more targeted sequencing such as gene panels. Specifically, the material can be used to obtain estimates of true positives, false positives, true negatives, and false negatives for variant calls.

RM 8671 is intended primarily for use in evaluating the performance of methods for determining physicochemical and biophysical attributes of monoclonal antibodies. It also provides a representative test molecule for development of novel technology for therapeutic protein characterization.

SRM	Description	Unit of Issue
2365	BK Virus DNA Quantitative Standard	1 vial
2366a	Cytomegalovirus DNA (Towne $\Delta$ 147 BAC) for DNA Measurements	1 vial
2372a	Human DNA Quantitation Standard	set (3)
2373	Genomic DNA Standards for <i>HER2</i> Measurements	set (5)
2374	DNA Sequence Library for External RNA Controls	96 tubes
2391d	PCR-Based DNA Profiling Standard	5 vials
2392	Mitochondrial DNA Sequencing	set (3)
2392-1	Mitochondrial DNA Sequencing (Human HL-60 DNA)	1 vial
2393	CAG Repeat Length Mutation in Huntington’s Disease	set (6)
2396	Oxidative DNA Damage Mass Spectrometry Standards	set (10)
8366	<i>EGFR</i> and <i>MET</i> Gene Copy Number Standards for Cancer Measurements	set (6)
8375	Microbial Genomic DNA Standards for Sequencing Performance Assessment (MG-001, MG-002, MG-003, MG-004)	set (4)
8391	Human DNA for Whole-Genome Variant Assessment (Son of Eastern European Ashkenazi Jewish Ancestry) (HG-002)	1 vial or 10 vial
8392	Human DNA for Whole-Genome Variant Assessment (Trio of Eastern European Ashkenazi Jewish Ancestry) (HG-002, HG-003, HG-004)	3 vials
8393	Human DNA for Whole-Genome Variant Assessment (Son of Chinese Ancestry) (HG-005)	1 vial or 10 vial
8398	Human DNA for Whole-Genome Variant Assessment (Daughter of Utah/European Ancestry) (HG-001)	1 vial or 10 vial
8671	NISTmAb, Humanized IgG1k Monoclonal Antibody	1 vial

See [Table 105.8](#) on the website for more information.


### Lead in Paint, Dust, and Soil (powder and sheet forms)

These SRMs and RM have been developed in conjunction with the U.S. EPA to monitor paint, soil, and dust sources of lead. SRMs 2570 through 2576 consist of one Mylar sheet per unit. Each sheet, 7.6 cm x 10.2 cm, is coated with a single uniform paint layer for use with portable x-ray fluorescence analyzers. SRMs 2580, 2581, 2582, and 2589 consist of paint that has been ground and homogenized into a powder, 99+% of which passes a 100 µm sieve. SRM 2583 and SRM 2584 consist of dust, 99+% of which passes a 100 µm sieve, that was collected in vacuum cleaner bags during cleaning of dwelling interiors. SRM 2583 and SRM 2584 are certified for arsenic, chromium, cadmium, lead, and mercury. [Also see Category 106.] SRMs 2584, 2586, and 2587 are dust or soil matrices containing lead from paint.

SRM	Description	Unit of Issue
1648a	Urban Particulate Matter	2 g
2569	Lead Paint Films for Children's Products	8 sheets
2570	Lead Paint Film for Portable X-Ray Fluorescence Analyzers - Blank (Color: White)	1 film
2571	Lead Paint Film for Building Surfaces (Nominal Pb 3.5 mg/cm <sup>2</sup> )(Color: Yellow)	1 + blank
2572	Lead Paint Film for Building Surfaces (Nominal Pb 1.6 mg/cm <sup>2</sup> )(Color: Orange)	1 + blank
2573	Lead Paint Film for Building Surfaces (Nominal Pb 1.0 mg/cm <sup>2</sup> )(Color: Red)	1 + blank

SRM	Description	Unit of Issue
2574	Lead Paint Film for Building Surfaces (Nominal Pb 0.7 mg/cm <sup>2</sup> )(Color: Gold)	1 + blank
2575	Lead Paint Film for Building Surfaces (Nominal Pb 0.3 mg/cm <sup>2</sup> )(Color: Green)	1 + blank
2576	Lead Paint Film for Building Surfaces (Nominal Pb 5.6 mg/cm <sup>2</sup> )(Color: Blue)	1 + blank
2579a	Lead Paint Films For Building Surfaces (SRM 2570 through SRM 2575)	set (6)
2580	Powdered Paint (Nominal Mass Fraction 4 % Lead)	30 g
2581	Powdered Paint (Nominal Mass Fraction 0.5 % Lead)	35 g
2582	Powdered Paint (Nominal Mass Fraction 200 mg/kg Lead)	20 g
2583	Trace Elements in Indoor Dust (Nominal Mass Fraction of 90 mg/kg Lead)	8 g
2584	Trace Elements in Indoor Dust (Nominal Mass Fraction of 1% Lead)	8 g
2586	Trace Elements in Soil Containing Lead From Paint (Nominal Mass Fraction 500 mg/kg Lead)	55 g
2587	Trace Elements in Soil (Nominal Mass Fraction of 3000 mg/kg Lead)	55 g
2589	Powdered Paint (Nominal Mass Fraction 10% Lead)	35 g
2783	Air Particulate on Filter Media (47 mm dia)	2 + 2 Blank

See [Table 105.13](#) on the website for more information.

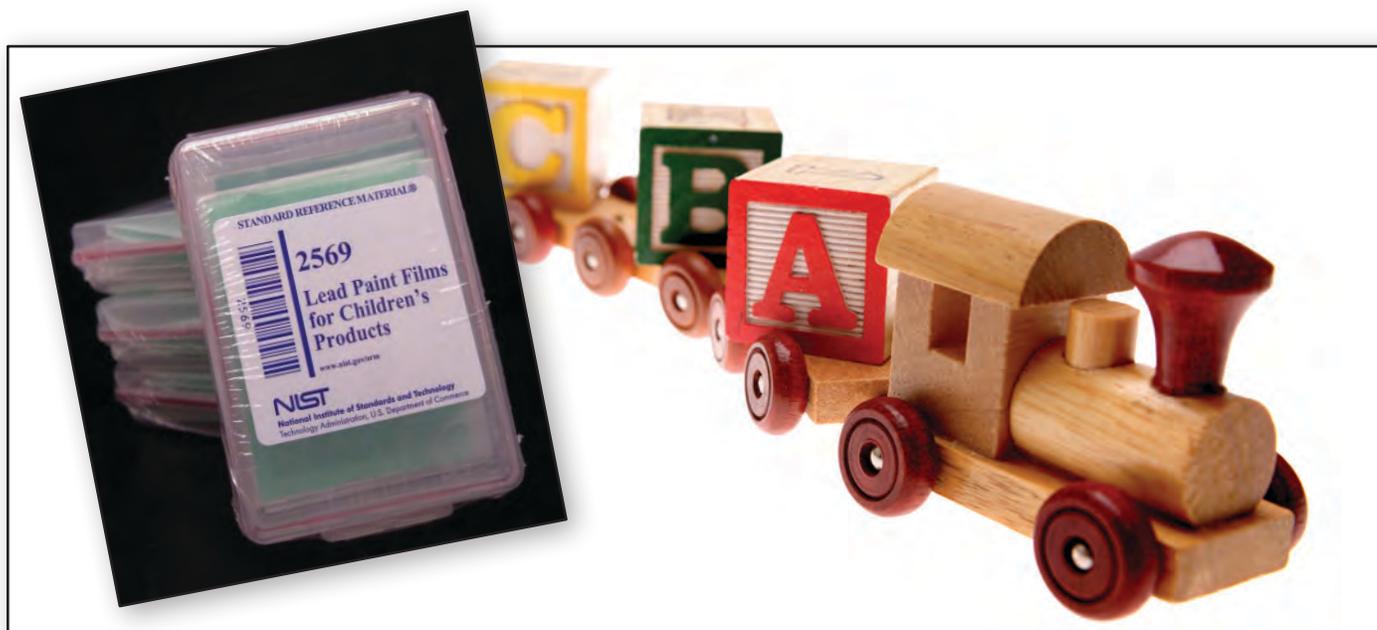



# Standard Reference Materials for Chemical Composition

## **Inorganics**

### Metal (Inorganics) Constituents in Natural Matrices (liquid and solid forms)

These SRMs and RM are for analysis of materials of health or environmental interest.

SRM	Description	Unit of Issue
1640a	Trace Elements in Natural Water	250 mL
1641e	Mercury in Water	10 x 10 mL
1643f	Trace Elements in Water	250 mL
1646a	Estuarine Sediment	70 g
1648a	Urban Particulate Matter	2 g
1944	New York/New Jersey Waterway Sediment	50 g
1946	Lake Superior Fish Tissue	5 x 8 g
1947	Lake Michigan Fish Tissue	5 x 8 g
2385	Slurried Spinach	4 x 70 g
2387	Peanut Butter	3 x 170 g
2451	Fine Carbon (Activated) From Cyanide Ore Leaching	100 g
2583	Trace Elements in Indoor Dust (Nominal Mass Fraction of 90 mg/kg Lead)	8 g
2584	Trace Elements in Indoor Dust (Nominal Mass Fraction of 1 % Lead)	8 g
2586	Trace Elements in Soil Containing Lead From Paint (Nominal Mass Fraction 500 mg/kg Lead)	55 g
2587	Trace Elements in Soil (Nominal Mass Fraction of 3000 mg/kg Lead)	55 g
2696	Silica Fume (powder form)	70 g
2700	Hexavalent Chromium in Contaminated Soil (Low Level)	75 g
2701	Hexavalent Chromium in Contaminated Soil (High Level)	75 g
2702	Inorganics in Marine Sediment	50 g
2703	Sediment for Solid Sampling (Small Sample) Analytical Techniques	5 g
2706	New Jersey Soil, Organics and Trace Elements	50 g
2709a	San Joaquin Soil Baseline Trace Element Concentrations	50 g
2710a	Montana I Soil Highly Elevated Trace Element Concentrations	50 g
2711a	Montana II Soil Moderately Elevated Trace Element Concentrations	50 g
2780a	Hard Rock Mine Waste	50 g
2781	Domestic Sludge	40 g

SRM	Description	Unit of Issue
2782	Industrial Sludge	70 g
2783	Air Particulate on Filter Media (47 mm dia)	2 + 2 Blank
2976	Trace Elements and Methylmercury in Mussel Tissue (Freeze-Dried)	25 g
8610	Mercury Isotopes in UM-Almaden Mono-Elemental Secondary Standard	4 x 5 mL
8704	Buffalo River Sediment	50 g
8785	Air Particulate Matter on Filter Media	3 filters
8786	Filter Blank for RM 8785	filter

See [Table 106.1](#) on the website for more information.





### Mercury in Activated Carbon

These SRMs are intended for use in the evaluation of chemical methods of analysis for mercury.

SRM	Description	Unit of Issue
2445	Mercury in Iodinated Activated Carbon	25 g
2448	Mercury in Brominated Activated Carbon	25 g
2451	Fine Carbon (Activated) - From Cyanide Ore Leaching	100 g

See [Table 106.3](#) on the website for more information.

### Environmental Matrices with Carbon Values

These materials are intended for use in evaluating analytical methods used to measure carbon.

SRM	Description	Unit of Issue
1632e	Trace Elements in Coal (Bituminous)	50 g
1944	New York/New Jersey Waterway Sediment	50 g
2718a	Green Petroleum Coke	50 g
2719	Calcined Petroleum Coke	50 g
2775	Sulfur in Foundry Coke	50 g
2776	Sulfur in Furnace Coke	50 g
8704	Buffalo River Sediment	50 g
8785	Air Particulate Matter on Filter Media	3 filters
8786	Filter Blank for RM 8785	filter

See [Table 106.4](#) on the website for more information.



### Used Auto Catalysts (powder form)

These SRMs are intended for use in the evaluation of methods for the analysis of the platinum group metals and lead in auto catalysts. They were produced in cooperation with the International Precious Metals Institute and are issued as fine (74  $\mu\text{m}$ , 200 mesh) powders.

SRM	Description	Unit of Issue
2556	Used Auto Catalyst (Pellets)	70 g
2557	Used Auto Catalyst (Monolith)	70 g

See [Table 106.6](#) on the website for more information.

### Zeolites (powder form)

These RMs are intended to provide a common source of zeolite materials for measurement comparisons. Additional reference and information values are provided for atomic ratios of Si to Al and Na to Al, trace element content, enthalpy of formation, unit cell parameters and particle size distributions. Figures are provided showing spectra for NMR analyses, plots of particle size distribution, electron microscope images of particles and plots of variation in sample mass with change in ambient humidity.

SRM	Description	Unit of Issue
8850	Zeolite Y	35-40 g
8851	Zeolite A	35-40 g
8852	Ammonium ZSM-5 Zeolite	35-40 g

See [Table 106.7](#) on the website for more information.



# How Well Do You Know Your Kidneys?

## NIST SRM 2925 Recombinant Human Serum Albumin Solution (Primary Reference Calibrator for Urine Albumin) (Frozen)

March 02, 2020

**What:** SRM 2925 is a frozen aqueous solution of recombinant human serum albumin (HSA). The SRM consists of two vials, each containing approximately 0.50 mL of frozen solution.

**Why:** Urine albumin is a major clinical biomarker of acute renal failure and chronic kidney disease. HSA is measured in human urine for clinical diagnosis of renal dysfunction and the evaluation of treatment efficacy.

**Who:** Clinical researchers and in-vitro diagnostics manufacturers working towards the accuracy and comparability of routine clinical urine albumin measurements.

**How:** SRM 2925 is intended for use as a primary reference calibrator for the quantification of HSA in human urine by liquid chromatography tandem mass spectrometry (LC-MS/MS) measurement methods. This SRM can also be used to assess the accuracy of calibrators and control materials used for the quantification of HSA using LC-MS/MS measurement methods. An international certified reference material for HSA should improve the equivalence of measurement results between different measurement methods and across geographic locations.





# Standard Reference Materials for Chemical Composition

## **Primary Gas Mixtures**

---



### Primary Gas Mixtures

These SRMs are for calibrating equipment and apparatus used to measure various components of gas mixtures and atmospheric pollutants. The typical gas mixture is supplied in a DOT 3AL specification aluminum (6061 alloy) cylinder with a nominal pressure exceeding 12.4 mPa that provides the user with approximately 0.73 m<sup>3</sup> of usable mixture. Due to increasing customer demand, these primary gas mixtures are in short supply and may not be readily available for sale. In such cases, a NIST traceable reference gas described below may be substituted.

A NIST Traceable Reference Material (NTRM) is a reference material produced by a commercial supplier with a well-defined traceability to NIST measurement results. This traceability is established via criteria and protocols defined by NIST that are tailored to meet the needs of the metrological community to be served. The NTRM concept was established to allow NIST to respond to the increasing needs for high quality reference materials by leveraging its relatively fixed human and financial resources with secondary reference material producers. Reference material producers adhering to NIST defined protocol requirements are allowed to use the NTRM trademark to identify their product.

The gas NTRM program was established in 1992 in partnership with the U.S. EPA and specialty gas companies as a means for providing end-users with the wide variety of certified gas standards needed to implement the Emissions Trading provision of the 1990 Clean Air Act. Gas NTRMs are produced and distributed by specialty gas companies with NIST oversight of the production and maintenance, and direct involvement in the analysis. NTRMs can be developed for any pollutant, concentration, and balance gas combination for which a NIST primary standard or SRM exists. The gas standards prepared according to this program are related, within known limits of uncertainty, to specific gaseous primary standards maintained by NIST.

### Carbon Monoxide in Air or Nitrogen

SRM	Description	Unit of Issue
2613a	Carbon Monoxide in Air (Nominal Amount-of-Substance Fraction 20 µmol/mol)	6 L cylinder
2614a	Carbon Monoxide in Air (Nominal Amount-of-Substance Fraction 45 µmol/mol)	6 L cylinder

See [Table 107.1\(1\)](#) on the website for more information.

### Carbon Monoxide in Nitrogen

SRM	Description	Unit of Issue
1677c*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 10 µmol/mol)	6 L cylinder
1678c*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 50 µmol/mol)	6 L cylinder
1679c*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 100 µmol/mol)	6 L cylinder
1680b*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol)	6 L cylinder
1681b*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 µmol/mol)	6 L cylinder
2635a*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 25 µmol/mol)	6 L cylinder
2636a*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 250 µmol/mol)	6 L cylinder
2637a*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 2500 µmol/mol)	6 L cylinder
2638a*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 5000 µmol/mol)	6 L cylinder
2639a	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 1 % mol/mol)	6 L cylinder
2640a	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 2 % mol/mol)	6 L cylinder
2641a	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 4 % mol/mol)	6 L cylinder
2642a*	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 8 % mol/mol)	6 L cylinder
2740a	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 10 % mol/mol)	6 L cylinder
2741a	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 13 % mol/mol)	6 L cylinder

\* The SRMs that are marked with \* are available as NTRMs from commercial suppliers.

See [Table 107.1\(2\)](#) on the website for more information.



## Carbon Dioxide in Nitrogen

SRM	Description	Unit of Issue
1674b*	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 7 % mol/mol)	6 L cylinder
2617	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol)	6 L cylinder
2619a	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 0.5 % mol/mol)	6 L cylinder
2620a	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1 % mol/mol)	6 L cylinder
2621a	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1.5 % mol/mol)	6 L cylinder
2622a	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 2 % mol/mol)	6 L cylinder
2624a	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 3 % mol/mol)	6 L cylinder
2625a*	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 3.5 % mol/mol)	6 L cylinder
2745*	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 16 % mol/mol)	6 L cylinder

\* The SRMs that are marked with \* are available as NTRMs from commercial suppliers.

See [Table 107.2](#) on the website for more information.



## Continental and Oceanic Air

SRM	Description	Unit of Issue
1720	Northern Continental Air	30 L cylinder
1721	Southern Oceanic Air	30 L cylinder
1722	Halocarbons in Continental Air (Nominal Amount-of-Substance Fraction - Ambient)	29.5 L cylinder

See [Table 107.3](#) on the website for more information.

## Hydrogen Sulfide in Nitrogen

SRM	Description	Unit of Issue
2730	Hydrogen Sulfide in Nitrogen (Nominal Amount-of-Substance Fraction 5 µmol/mol)	6 L cylinder
2731	Hydrogen Sulfide in Nitrogen (Nominal Amount-of-Substance Fraction 20 µmol/mol)	6 L cylinder

See [Table 107.4](#) on the website for more information.

## Methane in Air

SRM	Description	Unit of Issue
1658a	Methane in Air (Nominal Amount-of-Substance Fraction 1 µmol/mol)	6 L cylinder
1659a	Methane in Air (Nominal Amount-of-Substance Fraction 10 µmol/mol)	6 L cylinder
2750	Methane in Air (Nominal Amount-of-Substance Fraction 50 µmol/mol)	6 L cylinder
2751	Methane in Air (Nominal Amount-of-Substance Fraction 100 µmol/mol)	6 L cylinder

See [Table 107.5\(1\)](#) on the website for more information.



### Propane in Air

SRM	Description	Unit of Issue
1665b	Propane in Air (Nominal Amount-of-Substance Fraction 3 $\mu\text{mol/mol}$ )	6 L cylinder
1666b	Propane in Air (Nominal Amount-of-Substance Fraction 10 $\mu\text{mol/mol}$ )	6 L cylinder
1667b	Propane in Air (Nominal Amount-of-Substance Fraction 50 $\mu\text{mol/mol}$ )	6 L cylinder
1668b*	Propane in Air (Nominal Amount-of-Substance Fraction 100 $\mu\text{mol/mol}$ )	6 L cylinder
1669b	Propane in Air (Nominal Amount-of-Substance Fraction 500 $\mu\text{mol/mol}$ )	6 L cylinder
2764	Propane in Air (Nominal Amount-of-Substance Fraction 0.25 $\mu\text{mol/mol}$ )	6 L cylinder
2765	Propane in Air (Nominal Amount-of-Substance Fraction 100 nmol/mol)	6 L cylinder

\* The SRMs that are marked with \* are available as NTRMs from commercial suppliers.

See [Table 107.5\(2\)](#) on the website for more information.

### Propane in Nitrogen

SRM	Description	Unit of Issue
2644a	Propane in Nitrogen (Nominal Amount-of-Substance Fraction 250 $\mu\text{mol/mol}$ )	6 L cylinder
2647a	Propane in Nitrogen (Nominal Amount-of-Substance Fraction 2500 $\mu\text{mol/mol}$ )	6 L cylinder

See [Table 107.5\(3\)](#) on the website for more information.

### Organic Mixtures in Air or Nitrogen

SRM	Description	Unit of Issue
1660a	Methane and Propane in Air (Nominal Amount-of-Substance Fraction: 4 $\mu\text{mol/mol}$ Methane; 1 $\mu\text{mol/mol}$ Propane)	6 L cylinder

See [Table 107.5\(4\)](#) on the website for more information.

### Nitrogen Oxides in Air or Nitrogen

SRM	Description	Unit of Issue
1683b*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 50 $\mu\text{mol/mol}$ )	6 L cylinder
1684b*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 100 $\mu\text{mol/mol}$ )	6 L cylinder
1685b*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 250 $\mu\text{mol/mol}$ )	6 L cylinder
1686b*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 $\mu\text{mol/mol}$ )	6 L cylinder
1687b*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 $\mu\text{mol/mol}$ )	6 L cylinder
1718	Nitrous Oxide in Air (Nominal Amount-of-Substance Fraction 1 $\mu\text{mol/mol}$ )	6 L cylinder
2627a*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 5 $\mu\text{mol/mol}$ )	6 L cylinder
2628a*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 10 $\mu\text{mol/mol}$ )	6 L cylinder
2629a*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 20 $\mu\text{mol/mol}$ )	6 L cylinder
2630*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 1500 $\mu\text{mol/mol}$ )	6 L cylinder
2631a*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 3000 $\mu\text{mol/mol}$ )	6 L cylinder
2660a*	Total Oxides of Nitrogen (NO <sub>x</sub> ) in Air (Nominal Amount-of-Substance Fraction 100 $\mu\text{mol/mol}$ )	6 L cylinder
2735	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 800 $\mu\text{mol/mol}$ )	6 L cylinder
2737*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 nmol/mol)	30 L cylinder
2738*	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 nmol/mol)	30 L cylinder

\* The SRMs that are marked with \* are available as NTRMs from commercial suppliers.

See [Table 107.6](#) on the website for more information.



## Oxygen in Nitrogen

SRM	Description	Unit of Issue
<b>2657a*</b>	Oxygen in Nitrogen (Nominal Amount-of-Substance Fraction 2 % mol/mol)	6 L cylinder
<b>2658a*</b>	Oxygen in Nitrogen (Nominal Amount-of-Substance Fraction 10 % mol/mol)	6 L cylinder
<b>2659a*</b>	Oxygen in Nitrogen (Nominal Amount-of-Substance Fraction 21 % mol/mol)	6 L cylinder

\* The SRMs that are marked with \* are available as NTRMs from commercial suppliers.

See [Table 107.7](#) on the website for more information.



## Sulfur Dioxide in Nitrogen

SRM	Description	Unit of Issue
<b>1661a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol)	6 L cylinder
<b>1662a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 µmol/mol)	6 L cylinder
<b>1663a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1500 µmol/mol)	6 L cylinder
<b>1664a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 2500 µmol/mol)	6 L cylinder
<b>1689</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 5 µmol/mol)	6 L cylinder
<b>1693a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 50 µmol/mol)	6 L cylinder
<b>1694a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 100 µmol/mol)	6 L cylinder
<b>1696a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 3500 µmol/mol)	6 L cylinder

\* The SRMs that are marked with \* are available as NTRMs from commercial suppliers.

See [Table 107.8](#) on the website for more information.



# Turmeric, One of the World's Super Foods?

## SRM 3300 Curcumin Extract of Turmeric (*Curcuma longa* L.) Rhizome

May 05, 2020

**What:** **SRM 3300** is a curcuminoid extract of turmeric rhizome prepared from the same stock rhizome as SRM 3299 Ground Turmeric (*Curcuma longa* L.) Rhizome. A unit of **SRM 3300** consists of 5 packets of material each containing approximately 1 g of ground curcuminoid extract of turmeric rhizome.

**Why:** Dietary supplements containing curcumin extract have been used to alleviate symptoms of heartburn, stomach ulcers, gallstones, inflammation, and cancer. **SRM 3300** can be used to assist in the verification of manufacturer's label claims of turmeric-based dietary supplements and as quality control during manufacturing processes.

**Who:** **SRM 3300** will be used by laboratories that wish to demonstrate method validity, accuracy, or when qualifying in-house control materials.

**How:** Laboratories will analyze **SRM 3300** when evaluating analytical methods for the determination of curcuminoids in curcumin extracts of turmeric rhizomes or similar matrices.





Standard Reference Materials  
for Chemical Composition  
**Fossil & Alternative Fuels**

---

### Alcohols and Ethers [Oxygenates] in Gasoline

SRMs 2294 through 2297 were produced in response to the U.S. EPA Final Rule on Reformulated Gas aimed at reducing the volatile organic compounds emitted from gasoline. SRMs 2294 through 2297 are certified for oxygenate, sulfur, benzene, and toluene, with reference values for olefins and aromatics.

SRM	Description	Unit of Issue
2294	Reformulated Gasoline (Nominal Mass Fraction 11 % MTBE)	2 x 20 mL
2295	Reformulated Gasoline (Nominal Mass Fraction 15 % MTBE)	2 x 20 mL
2296	Reformulated Gasoline (Nominal Mass Fraction 13 % ETBE)	2 x 20 mL
2297	Reformulated Gasoline (Nominal Mass Fraction 10 % Ethanol)	2 x 20 mL

See [Table 108.1](#) on the website for more information.

### Metal Constituents in Fossil Fuels (liquid forms)

This SRM and RM are for analysis of metal trace elements in fuel oil and reference fuel. SRM 1634c is a "No. 6" fuel oil in terms of viscosity but has a flash point of 43 °C.

SRM	Description	Unit of Issue
1634c	Trace Elements in Fuel Oil	100 mL
8505	Vanadium in Crude Oil	250 mL

See [Table 108.2](#) on the website for more information.

### Sulfur, Mercury, and Chlorine in Fuels (liquid and solid forms)

These materials are for analysis of sulfur, mercury, and chlorine in fossil fuels.

SRM	Description	Unit of Issue
1616b	Sulfur in Kerosene (Low Level)	100 mL
1617b	Sulfur in Kerosene (High Level)	100 mL
1619b	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 0.7 %)	100 mL
1622e	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 2 %)	100 mL
1623d	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 0.2 %)	100 mL
1624d	Sulfur in Diesel Fuel Oil (Nominal Mass Fraction 0.4%)	100 mL

SRM	Description	Unit of Issue
1635a	Trace Elements in Coal, (Subbituminous)	50 g
2294	Reformulated Gasoline (Nominal Mass Fraction 11 % MTBE)	2 x 20 mL
2295	Reformulated Gasoline (Nominal Mass Fraction 15 % MTBE)	2 x 20 mL
2296	Reformulated Gasoline (Nominal Mass Fraction 13 % ETBE)	2 x 20 mL
2297	Reformulated Gasoline (Nominal Mass Fraction 10 % Ethanol)	2 x 20 mL
2298	Sulfur in Gasoline (High-Octane)	5 x 20 mL
2299	Sulfur in Gasoline (Reformulated)	5 x 20 mL
2682c	Subbituminous Coal (Nominal Mass Fraction 0.5 % Sulfur)	50 g
2683c	Bituminous Coal (Nominal Mass Fraction 2 % Sulfur)	50 g
2684c	Bituminous Coal (Nominal Mass Fraction 3 % Sulfur)	50 g
2685c	Bituminous Coal (Nominal Mass Fraction 5 % Sulfur)	50 g
2693	Bituminous Coal (Nominal Mass Fraction 0.5 % Sulfur)	50 g
2716	Sulfur in Gasoline (<1 mg/kg)	5 x 20 mL
2717a	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 3 %)	100 mL
2718a	Green Petroleum Coke	50 g
2719	Calcined Petroleum Coke	50 g
2720	Sulfur in Di- <i>n</i> -Butyl Sulfide	5 x 4.5 mL
2721	Crude Oil (Light-Sour)	5 x 10 mL
2722	Crude Oil (Heavy Sweet)	5 x 10 mL
2723b	Sulfur in Diesel Fuel Oil (Nominal Mass Fraction 10 mg/kg)	100 mL
2770	Sulfur in Diesel Fuel Oil (Nominal Mass Fraction 40 mg/kg)	10 x 10 mL
2771	Sulfur in Diesel Fuel Blend Stock	100 mL
2773	B100 Biodiesel (Animal-Based)	5 x 10 mL
2775	Sulfur in Foundry Coke	50 g
2776	Sulfur in Furnace Coke	50 g
2778	Mercury in Crude Oil	5 x 10 mL

See [Table 108.3](#) on the website for more information and additional resources.



### Moisture in Oils and Alcohols (liquid form)

SRM 2890 Water Saturated 1-Octanol is certified for water content and is intended for use in calibrating instruments and validating the accuracy of analytical methods. Water concentration values for RMs 8506a and 8509 are not certified but represent the “best estimate” of the moisture content determined by NIST and are intended for use in developing and validating methods for the determination of moisture in oil and similar matrices.

SRM	Description	Unit of Issue
2721	Crude Oil (Light-Sour)	5 x 10 mL
2722	Crude Oil (Heavy-Sweet)	5 x 10 mL
2890	Water Saturated 1-Octanol	5 x 2 mL
8506a	Moisture in Transformer Oil	5 x 9.5 mL
8509	Moisture in Methanol	5 x 5 mL

See [Table 108.4](#) on the website for more information.

### Fossil Fuel: Trace Elements (solid forms)

SRM	Description	Unit of Issue
1632e	Trace Elements in Coal (Bituminous)	50 g
1633c	Trace Elements in Coal Fly Ash	75 g
1635a	Trace Elements in Coal, (Subbituminous)	50 g
2429	Flue Gas Desulfurization Gypsum	200 g
2689	Coal Fly Ash	3 x 10 g
2690	Coal Fly Ash	3 x 10 g
2691	Coal Fly Ash	3 x 10 g
2718a	Green Petroleum Coke	50 g
2719	Calcined Petroleum Coke	50 g

See [Table 108.6](#) on the website for more information.

### Biofuels

SRM	Description	Unit of Issue
2377	Fatty Acid Methyl Esters in 2,2,4-Trimethylpentane	5 x 1.2 mL
2772	B100 Biodiesel (Soy-Based)	5 x 10 mL
2773	B100 Biodiesel (Animal-Based)	5 x 10 mL

See [Table 108.8](#) on the website for more information.

### Biomass Feedstock

SRM	Description	Unit of Issue
2790	Inorganic Constituents in Hardwood Biomass Material	2 x 30 g
2791	Inorganic Constituents in Softwood Biomass Material	2 x 30 g
8495	Northern Softwood	10 sheets
8496	Eucalyptus Hardwood	10 sheets

See [Table 108.9](#) on the website for more information.






Please visit the NIST Facebook page  
<https://www.facebook.com/usnistgov>



Follow NIST on Twitter  
<https://twitter.com/usnistgov>



*We appreciate your feedback!*

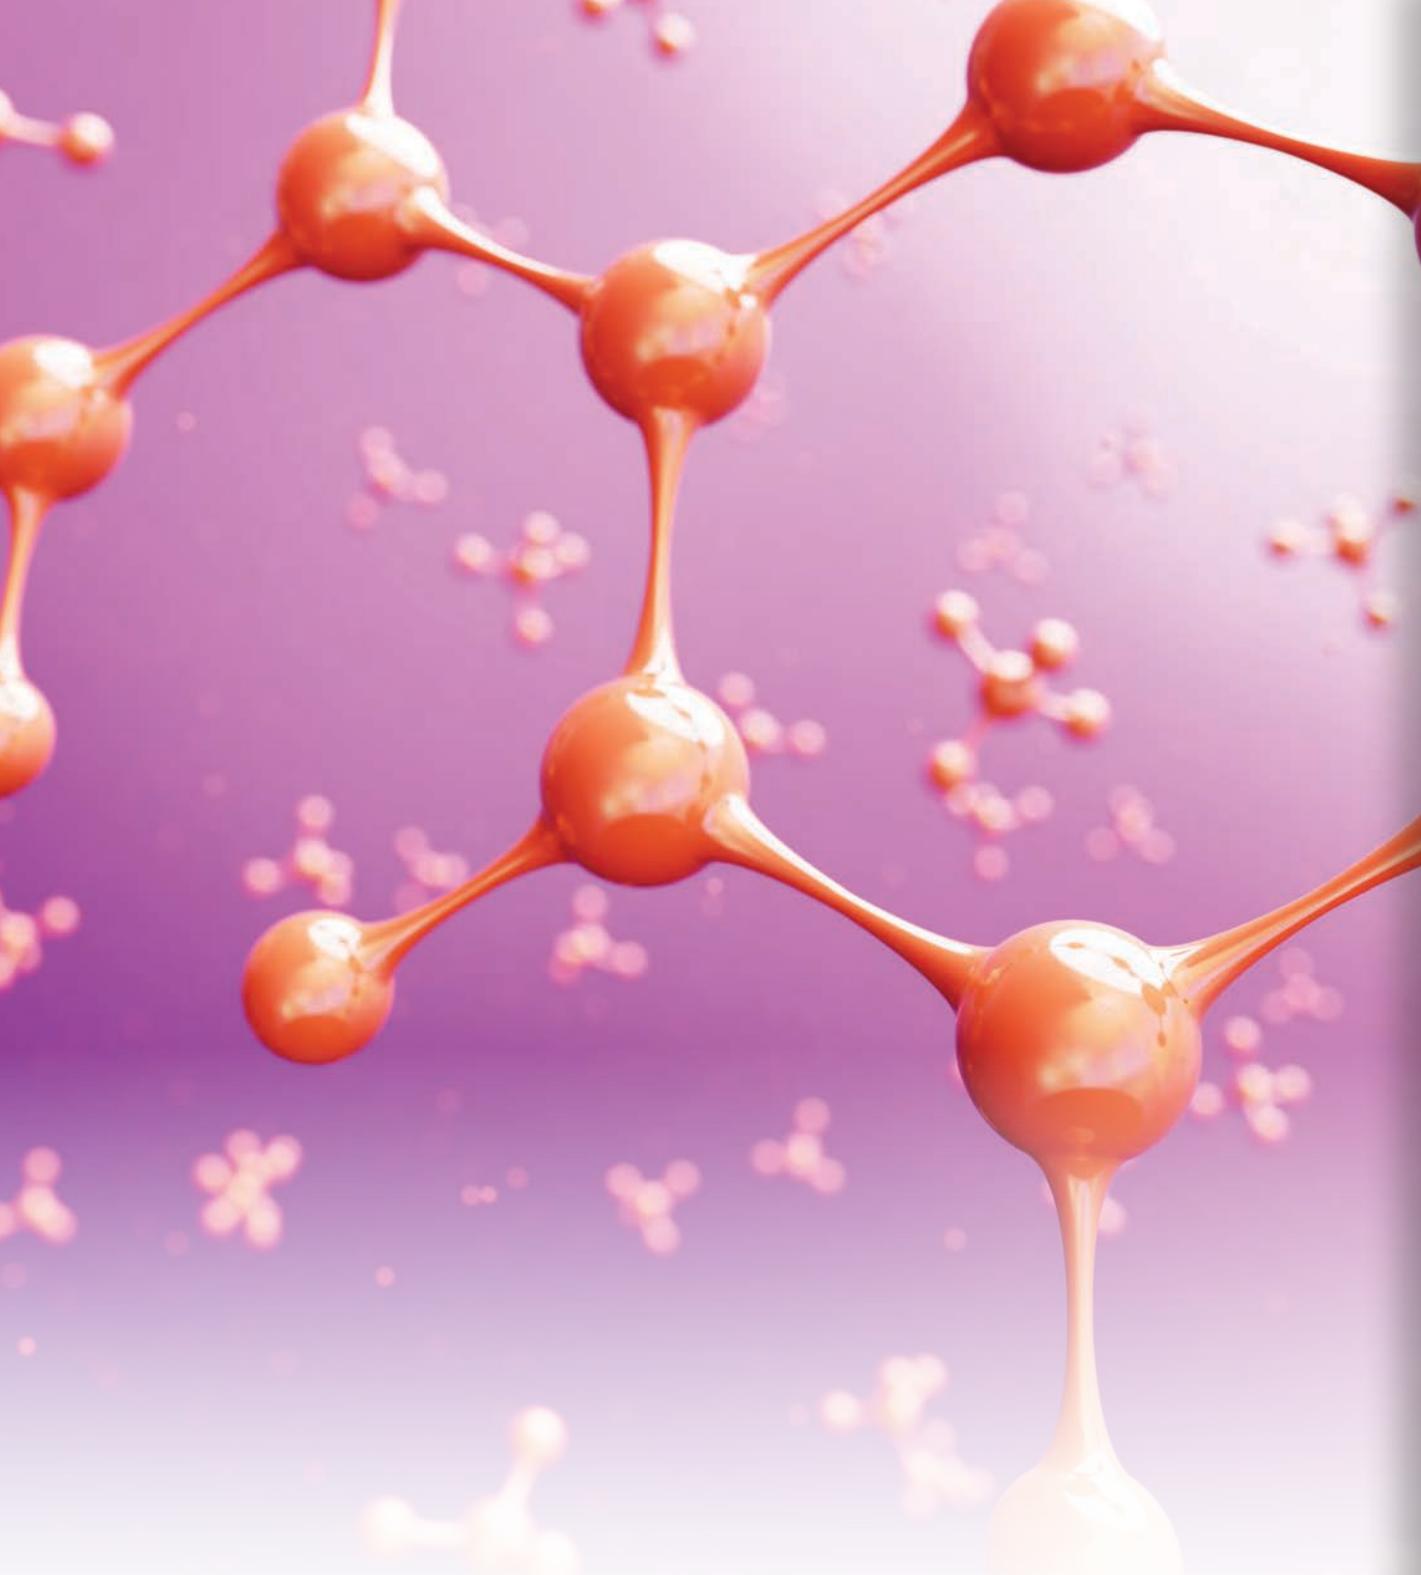

# Standard Reference Materials for Chemical Composition

## **Organics**



### Organics

SRM	Description	Unit of Issue
869b	Column Selectivity Test Mixture for Liquid Chromatography	5 x 1.1 mL
870	Column Performance Test Mixture for Liquid Chromatography	5 x 1.1 mL
1491a	Methyl-Substituted Polycyclic Aromatic Hydrocarbons in Toluene	5 x 1.2 mL
1493	Polychlorinated Biphenyl Congeners in 2,2,4-Trimethylpentane	5 x 1.2 mL
1494	Aliphatic Hydrocarbons in 2,2,4-Trimethylpentane	5 x 1.2 mL
1543	GC/MS System Performance Standard	4 x 1 mL
1588c	Organics in Fish Oil	5 x 1.2 mL
1597a	Complex Mixture of Polycyclic Aromatic Hydrocarbons from Coal Tar	1 x 1.3 mL
1647f	Priority Pollutant Polycyclic Aromatic Hydrocarbons in Acetonitrile	5 x 1.3 mL
1649b	Urban Dust	2 g
1650b	Diesel Particulate Matter	200 mg
1941b	Organics in Marine Sediment	50 g
1944	New York/New Jersey Waterway Sediment	50 g
1945	Organics in Whale Blubber	2 x 15 g
1946	Lake Superior Fish Tissue	5 x 7-9 g
1947	Lake Michigan Fish Tissue	5 x 8 g
1953	Organic Contaminants in Non-Fortified Human Milk	5 x 5 mL
1954	Organic Contaminants in Fortified Human Milk	5 x 5 mL
1957	Organic Contaminants in Non-Fortified Human Serum (Freeze Dried)	5 x 10.7 mL
1958	Organic Contaminants in Fortified Human Serum (Freeze Dried)	5 x 10.7 mL
1974c	Organics in Mussel Tissue ( <i>Mytilus edulis</i> )	5 x 10 g
1975	Diesel Particulate Extract	4 x 1.2 mL
1991	Mix Coal Tar/Petroleum Extract in Methylene Chloride	5 x 1.2 mL
2257	PBDE Congeners in 2,2,4-Trimethylpentane	5 x 1.2 mL
2258	BDE 209 in 2,2,4-Trimethylpentane	5 x 1.2 mL
2259	PCB Congeners in 2,2,4-Trimethylpentane	5 x 1.2 mL
2260a	Aromatic Hydrocarbon in Toluene	5 x 1.2 mL
2261	Chlorinated Pesticides in Hexane (Nominal Mass Concentration 2 µg/mL)	5 x 1.2 mL
2262	Chlorinated Biphenyl Congeners in 2,2,4-Trimethylpentane (Nominal Mass Concentration 2 µg/mL)	5 x 1.2 mL

SRM	Description	Unit of Issue
2266	Hopanes and Steranes in 2,2,4-Trimethylpentane	5 x 1.2 mL
2269	Perdeuterated PAH-I Solution in Hexane/Toluene	5 x 1.2 mL
2270	Perdeuterated PAH-II Solution in Hexane/Toluene	5 x 1.2 mL
2274	PCB Congeners in 2,2,4-Trimethylpentane	5 x 1.2 mL
2275	Chlorinated Pesticide Solution-II in 2,2,4-Trimethylpentane	5 x 1.2 mL
2377	Fatty Acid Methyl Esters in 2,2,4-Trimethylpentane	5 x 1.2 mL
2585	Organic Contaminants in House Dust	10 g
2706	New Jersey Soil, Organics and Trace Elements	50 g
2777	Weathered Gulf of Mexico Crude Oil in Toluene	5 x 1.2 mL
2779	Gulf of Mexico Crude Oil	5 x 1.2 mL
2781	Domestic Sludge	40 g
2786	Fine Atmospheric Particulate Matter (<4 µm)	100 mg to 140 mg
2787	Fine Atmospheric Particulate Matter (<10 µm)	100 mg to 140 mg
2860	Phthalates in Polyvinyl Chloride	2 levels, 1 blank, 2 g each
2974a	Organics in Freeze-Dried Mussel Tissue ( <i>Mytilus edulis</i> )	5 g
2975	Diesel Particulate Matter	1 g
3060	Monoester Phthalates in Acetonitrile	5 x 1.2 mL
3262	St. John's Wort ( <i>Hypericum perforatum</i> L.) Aerial Parts	5 x 3.3 g
3672	Organic Contaminants in Smokers' Urine (Frozen)	5 x 10 mL
3673	Organic Contaminants in Non-Smokers' Urine (Frozen)	5 x 10 mL
8446	Perfluorinated Carboxylic Acids and Perfluorooctane Sulfonamide in Methanol	4 x 1.2 mL
8447	Perfluorinated Sulfonic Acids in Methanol	3 x 1.2 mL

See [Table 109.1](#) on the website for more information.





### EPA: Organic Compounds Related to Water Analysis (including drinking water)

These SRMs are intended primarily for the calibration of instrumentation and validation of methods for volatile or semi-volatile organic compound determinations. Because of its miscibility with water, each SRM can also be used to fortify aqueous samples with known amounts of the organic compound. These SRMs were developed primarily to support the Chemical Calibration Providers of the Proficiency Testing Program with support by the U.S. Environmental Protection Agency (EPA).

SRM	Description	Unit of Issue
3074	Phthalates in Methanol	5 x 1.2 mL
3077	Aroclor 1242 in Transformer Oil	5 x 1.2 mL
3079	Aroclor 1254 in Transformer Oil	5 x 1.2 mL
3080	Aroclor 1260 in Transformer Oil	5 x 1.2 mL

See [Table 109.3](#) on the website for more information.



### Perfluorinated and Polyfluorinated Alkyl Substances (PFAS)

SRM	Description	Unit of Issue
1946	Lake Superior Fish Tissue	5 x 7-9 g
1947	Lake Michigan Fish Tissue	5 x 8 g
1957	Organic Contaminants in Non-fortified Human Serum (Freeze-Dried)	5 x 10.7 mL
1958	Organic Contaminants in Fortified Human Serum (Freeze-Dried)	5 x 10.7 mL
2585	Organic Contaminants in House Dust	10 g
2586	Trace Elements in Soil Containing Lead From Paint (Nominal Mass Fraction of 500 mg/kg Lead)	55 g
2781	Domestic Sludge	40 g
8446	Perfluorinated Carboxylic Acids and Perfluorooctane Sulfonamide in Methanol	4 x 1.2 mL
8447	Perfluorinated Sulfonic Acids in Methanol	3 x 1.2 mL

See [Table 109.5](#) on the website for more information.

### Crime Scene Investigations

SRM 2285 is intended primarily for use in the calibration of chromatographic instrumentation used for the classification of an ignitable liquid residue. This SRM is a solution of 15 compounds, including even carbon number aliphatic hydrocarbons from hexane to tetracosane, toluene, *p*-xylene, 2-ethyltoluene, 3-ethyltoluene, and 1,2,4-trimethylbenzene in methylene chloride.


SRM	Description	Unit of Issue
2285	Ignitable Liquids Test Mixture	5 x 1.2 mL
2460a	Standard Bullet Replica	each
2461	Standard Cartridge Case	each

See [Table 109.4](#) on the website for more information.

# Please Register Your SRM Online!

Registering will ensure that you will be notified of any technical updates or developments.

[https://www.nist.gov/srm\\_reg](https://www.nist.gov/srm_reg)

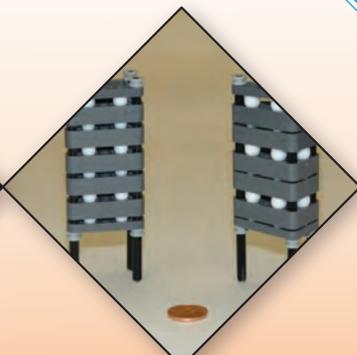



# Standard Reference Materials for Chemical Composition

## **Food & Agriculture**



### Foods and Beverages - Macro and Micronutrients

These SRMs are for validation of analytical procedures and calibration of apparatus used in the analysis of trace elements and other analytes in foods and related products.

SRM	Description	Unit of Issue
1546a	Meat Homogenate	4 cans x 85 g
1548a	Typical Diet	set (2)
1549a	Whole Milk Powder	5 pouches x 10 g each
1566b	Oyster Tissue	25 g
1567b	Wheat Flour	50 g
1568b	Rice Flour	50 g
1570a	Trace Elements in Spinach Leaves	60 g
1577c	Bovine Liver	20 g
1845a	Whole Egg Powder	5 pouches x 10 g each
1849a	Infant/Adult Nutritional Formula I (milk-based)	10 pouches x 10 g each
1869	Infant/Adult Nutritional Formula II (milk/whey/soy-based)	10 pouches x 10 g each
1946	Lake Superior Fish Tissue	5 x 7-9 grams
1947	Lake Michigan Fish Tissue	5 x 8 grams
2383a	Baby Food Composite	4 x 70 g
2384	Baking Chocolate	5 x 91 g
2385	Slurried Spinach	4 x 70 g
2387	Peanut Butter	3 x 170 g
3035	Arsenic Species in Apple Juice	5 x 1.5 mL
3233	Fortified Breakfast Cereal	60 g each
3234	Soy Flour	50 g
3252	Protein Drink Mix	5 pouches x 10 g each
3253	Yerba Mate Leaves	2 x 10 g
3254	Green Tea ( <i>Camellia sinensis</i> ) Leaves	5 x 3 g
3255	Green Tea ( <i>Camellia sinensis</i> ) Extract	5 x 1 g
3281	Cranberry (Fruit)	5 x 6 g
3282	Low-Calorie Cranberry Juice Cocktail	5 x 1.2 mL
3287	Blueberry (Fruit)	5 pouches x 5 g each
3290	Dry Cat Food	5 pouches x 10 g each
3530	Iodized Table Salt (Iodide)	1 bottle x 200 g

See [Table 110.1](#) on the website for more information.

### Foods and Beverages - Other Components of Potential Interest

These SRMs are for validation of analytical procedures and calibration of apparatus used in the analysis of trace elements and other analytes in foods and related products.

SRM	Description	Unit of Issue
1565	Mycotoxins in Corn	2 x 60 g
1566b	Oyster Tissue	25 g
1849a	Infant/Adult Nutritional Formula I (milk-based)	10 pouches x 10 g each
1869	Infant/Adult Nutritional Formula II (milk/whey/soy-based)	10 pouches x 10 g each
1946	Lake Superior Fish Tissue	5 x 7-9 grams
1947	Lake Michigan Fish Tissue	5 x 8 grams
2387	Peanut Butter	3 x 170 g
3233	Fortified Breakfast Cereal	60 g each
3234	Soy Flour	50 g
3253	Yerba Mate Leaves	2 x 10 g
3254	Green Tea ( <i>Camellia sinensis</i> ) Leaves	5 x 3 g
3255	Green Tea ( <i>Camellia sinensis</i> ) Extract	5 x 1 g
3278	Tocopherols in Edible Oils	5 x 1 mL
3281	Cranberry (Fruit)	5 x 6 g
3282	Low-Calorie Cranberry Juice Cocktail	5 x 1.2 mL
3287	Blueberry (Fruit)	5 pouches x 5 g each

See [Table 110.1](#) on the website for more information.

### Food Contaminants and Allergens

SRM	Description	Unit of Issue
1566b	Oyster Tissue	25 g
1946	Lake Superior Fish Tissue	5 x 7-9 g
1947	Lake Michigan Fish Tissue	5 x 8 g
1953	Organic Contaminants in Non-Fortified Human Milk	5 x 5 mL
1954	Organic Contaminants in Fortified Human Milk	5 x 5 mL
2387	Peanut Butter	3 x 170 g
3256	Green Tea-Containing Solid Oral Dosage Form	5 x 2.5 g
8445	Spray-Dried Whole Egg for Allergen Detection	5 g
8642a	FDA Saxitoxin Dihydrochloride Solution	5 x 1.2 mL

See [Table 110.2](#) on the website for more information.



### Agricultural Materials (powder form)

SRM	Description	Unit of Issue
1515	Apple Leaves	50 g
1547	Peach Leaves	50 g
1570a	Trace Elements in Spinach Leaves	60 g
1573a	Tomato Leaves	50 g
1575a	Trace Elements in Pine Needles	50 g

See [Table 110.4](#) on the website for more information.

### Fertilizers (powder form)

These SRMs are intended for use in the fertilizer industry as working standards.

SRM	Description	Unit of Issue
120c	Phosphate Rock (Florida)	90 g
193	Potassium Nitrate	90 g
194a	Ammonium Dihydrogen Phosphate	90 g
200b	Potassium Dihydrogen Phosphate (Fertilizer Standard)	90 g
694	Phosphate Rock, Western	90 g
695	Trace Elements in Multi-Nutrient Fertilizer	70 g
2429	Flue Gas Desulfurization Gypsum	200 g

See [Table 110.5](#) on the website for more information.

### Wheat Hardness (kernel form)

This RM is intended primarily for calibrating instruments used to determine the hardness of bulk or single kernel wheat. RM 8441 was prepared and analyzed by the Federal Grain Inspection Service program. Grain Inspection Packers and Stockyards Administration of the United States Department of Agriculture.

SRM	Description	Unit of Issue
8441a	Wheat Hardness (kernel form)	set (50)

See [Table 110.6](#) on the website for more information.

### Tobacco Related Materials

SRM	Description	Unit of Issue
3222	Cigarette Tobacco Filler	20 x 10 g


See [Table 110.10](#) on the website for more information.

### Dietary Supplement Materials (includes nutraceuticals and herbs)

SRM	Description	Unit of Issue
3232	Kelp Powder ( <i>Thallus laminariae</i> )	3 x 5 g
3235	Soy Milk	10 x 10 mL
3236	Soy Protein Isolate	5 x 10 g
3237	Soy Protein Concentrate	5 x 10 g
3238	Soy-Containing Solid Oral Dosage Form	5 x 10 g
3246	<i>Ginkgo biloba</i> (Leaves)	5 x 3 g
3247	<i>Ginkgo biloba</i> (Extract)	5 x 1 g
3248	Ginkgo-Containing Tablets	5 x 1 g
3250	Saw Palmetto ( <i>Serenoa repens</i> ) Fruit	5 x 6 g
3251	Saw Palmetto ( <i>Serenoa repens</i> ) Extract	5 x 1 mL
3254	Green Tea ( <i>Camellia sinensis</i> ) Leaves	5 x 3 g
3255	Green Tea ( <i>Camellia sinensis</i> ) Extract	5 x 1 g
3256	Green Tea-Containing Solid Oral Dosage Form	5 x 2.5 g
3262	St. John's Wort ( <i>Hypericum perforatum</i> L.) Aerial Parts	5 x 3.3 g
3274	Botanical Oils Containing Omega-3 and Omega-6 Fatty Acids	set (4)
3275	Omega-3 and Omega-6 Fatty Acids in Fish Oil	3 ea 2 x 1.2 mL
3279	Chromium Dietary Supplement	5 x 6 g
3280	Multivitamin/Multielement Tablets	30 x 5 bottles
3281	Cranberry (Fruit)	5 x 6 g
3282	Low-Calorie Cranberry Juice Cocktail	5 x 1.2 mL
3283	Cranberry Extract	5 x 2.5 g
3284	Cranberry-Containing Solid Oral Dosage Form	5 x 2.5 g
3285	Mixed-Berry Containing Solid Oral Dosage Form	5 x 2.5 g
3291	Bilberry Extract	5 x 1 g
3299	Ground Turmeric ( <i>Curcuma longa</i> L.) Rhizome	5 x 3 g
3300	Curcumin Extract of Turmeric ( <i>Curcuma longa</i> L.) Rhizome	5 x 1 g
3530	Iodized Table Salt (Iodide)	1 x 200 g
3532	Calcium-Containing Solid Oral Dosage Form	5 x 10 g
8037	Krill Oil	3 x 4.5 mL

See [Table 110.9](#) on the website for more information.


# Distribution of SRMs in the AOAC Food Triangle

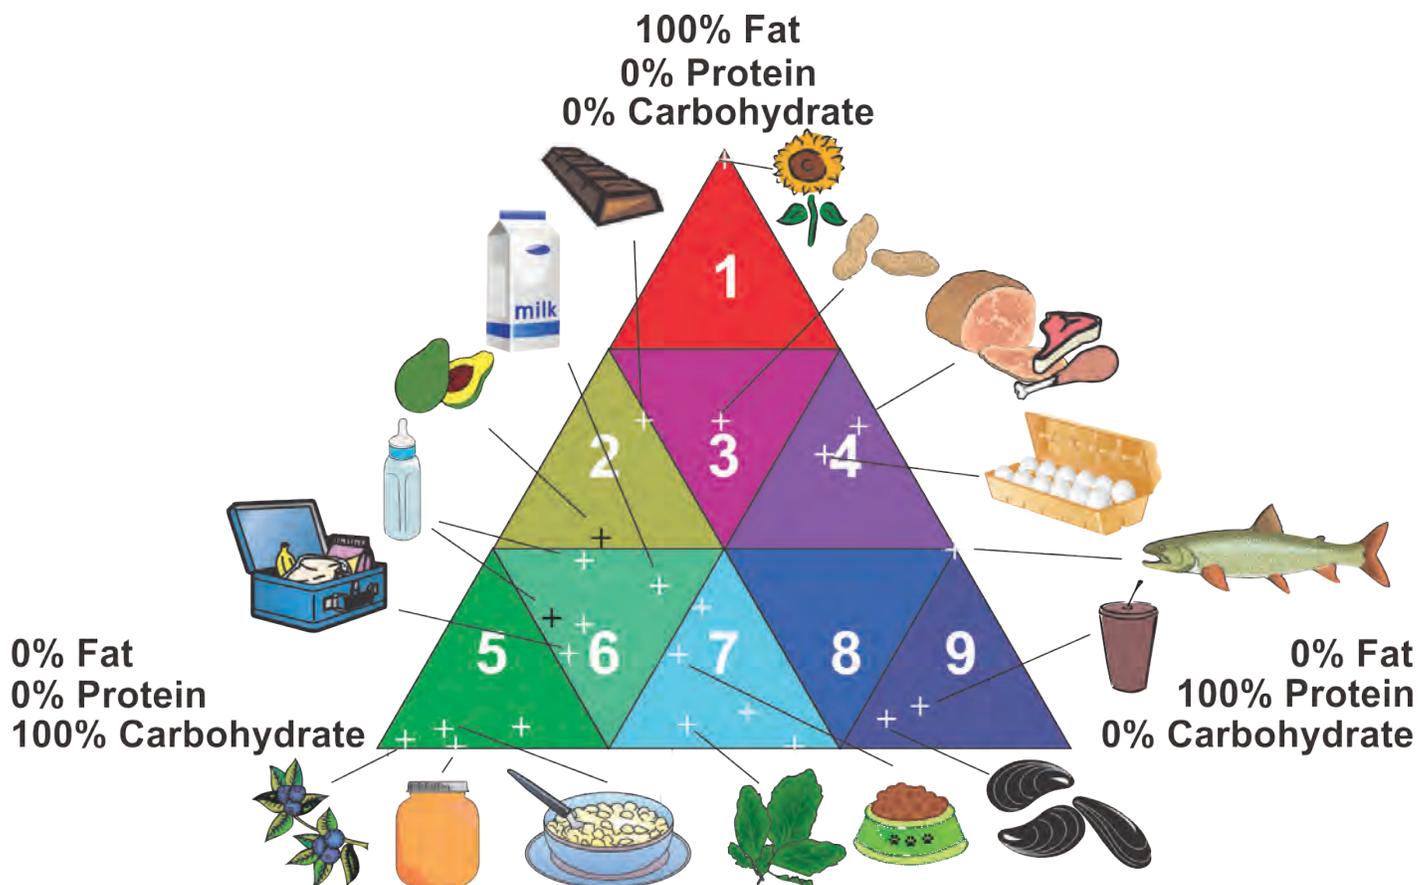

NIST classifies food-matrix SRMs based on fat, protein, and carbohydrate content using a triangle developed by AOAC INTERNATIONAL<sup>1</sup>, based on the supposition that foods (and thus reference materials) within each sector will have similar properties and therefore will pose similar challenges in determination of the same nutrient. Preparation of food-matrix SRMs has been based on the distribution of foods from a typical US diet in the AOAC triangle, with a majority of common foods and SRMs categorized in sectors 5 and 6 (e.g., fruits, vegetables, cereals, and grains). Conversely, only a small fraction of foods and SRMs are categorized in sectors 1 through 4 (higher-fat foods like meats and nuts). Additional materials are also prepared based on suggestions from user communities.

- |   |   |   |  |
|---|---|---|--|
| 1 | SRM 1588c Organics in Fish Oil            | 6 | SRM 1548a Typical Diet                     |
|   | SRM 3274 Fatty Acids in Botanical Oils    |   | SRM 1549a Whole Milk Powder                |
|   | SRM 3275 Fatty Acids in Fish Oils         |   | SRM 1849a Infant/Adult Nutritional Formula |
| 2 | SRM 2384 Baking Chocolate                 | 7 | SRM 1566b Oyster Tissue                    |
|   | SRM 2386 Avocado Powder*                  |   | SRM 2385 Slurried Spinach                  |
| 3 | SRM 2387 Peanut Butter                    |   | SRM 3234 Soy Flour                         |
| 4 | SRM 1546a Meat Homogenate                 |   | SRM 3290 Dry Cat Food                      |
|   | SRM 1845a Whole Egg Powder                | 9 | SRM 1946 Lake Superior Fish Tissue         |
| 5 | SRM 1568b Rice Flour                      |   | SRM 1947 Lake Michigan Fish Tissue         |
|   | SRM 2383a Baby Food Composite             |   | SRM 2974a Mussel Tissue                    |
|   | SRM 3233 Fortified Breakfast Cereal       |   | SRM 3252 Protein Drink Mix                 |
|   | SRM 3287 Blueberries                      |   | *in preparation                            |
|   | SRM 1869 Infant/Adult Nutritional Formula |   |  |

<sup>1</sup> W.R. Wolf, K.W. Andrews (1995) *Fresenius J. Anal Chem* 352:73-76.

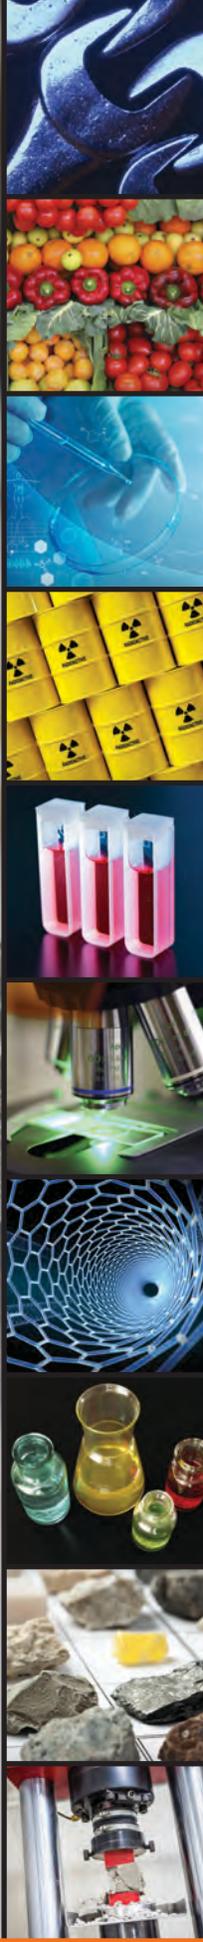

Standard Reference Materials  
for Chemical Composition  
**Geological Materials & Ores**

---

## Ores (powder form)

SRM	Description	Unit of Issue
25d	Manganese Ore	60 g
69b	Bauxite (Arkansas)	60 g
79a	Fluorspar	120 g
120c	Phosphate Rock (Florida)	90 g
180	Fluorspar, High Grade	120 g
182	Lithium Ore (Petalite)	45 g
183	Lithium Ore (Lepidolite)	45 g
277	Tungsten Concentrate	100 g
330a	Copper Ore Mill Heads	90 g
331a	Copper Ore Mill Tails	40 g
423	Molybdenum Oxide Concentrate	50 g
600	Bauxite, Australian-Darling Range	90 g
670	Rutile Ore	90 g
690	Iron Ore Canada	100 g
691	Iron Oxide, Reduced	100 g
692	Iron Ore, Labrador	100 g
693	Iron Ore (Nimba)	100 g
694	Phosphate Rock, Western	90 g
696	Bauxite, Surinam	60 g
697	Bauxite, Dominican	60 g
698	Bauxite, Jamaican	60 g
886	Refractory Gold Ore	200 g
1835	Borate Ore	60 g
2430	Scheelite Ore	100 g

See [Table 111.2](#) on the website for more information.

## Ore Bioleaching Substrate (powder form)

This RM is for use as a bioleaching substrate and for testing bioleaching rates. The material consists of pyrite from New Mexico. *Thiobacillus ferrooxidans* was used in the determinations.

SRM	Description	Unit of Issue
8455	Pyrite Ore Bioleaching Substrate	100 g

See [Table 111.3](#) on the website for more information.

## Clays (powder form)

SRM	Description	Unit of Issue
97b	Flint Clay	60 g
98b	Plastic Clay	60 g
679	Brick Clay	75 g

See [Table 111.4](#) on the website for more information.

## Rock and Minerals (powder form)

SRM	Description	Unit of Issue
1d	Limestone, Argillaceous	70 g
70b	Potassium Feldspar	40 g
81a	Glass Sand	75 g
88b	Dolomitic Limestone	75 g
99b	Soda Feldspar	40 g
165a	Glass Sand	75 g
278	Obsidian Rock	35 g
607	Potassium Feldspar	5 g
688	Basalt Rock	60 g
1413	High Alumina Sand	75 g
2429	Flue Gas Desulfurization Gypsum	200 g
2780a	Hard Rock Mine Waste	50 g

See [Table 111.5](#) on the website for more information.

## Refractories (powder form)

SRM	Description	Unit of Issue
76a	Burnt Refractory (Al <sub>2</sub> O <sub>3</sub> -40%)	75 g
77a	Burnt Refractory (Al <sub>2</sub> O <sub>3</sub> -60%)	75 g
78a	Burnt Refractory (Al <sub>2</sub> O <sub>3</sub> -70%)	75 g
198	Silica Brick	45 g
199	Silica Brick	45 g

See [Table 111.6](#) on the website for more information.



**Soils, Sediments, and Sludges  
(powder form)**

SRMs 2586, 2587, 2700, 2701, 2709a, 2710a, 2711a, 2781, 2782 also have non-certified leach data. See certificate for details and leach methods used.

SRM	Description	Unit of Issue
1646a	Estuarine Sediment	70 g
1944	New York/New Jersey Waterway Sediment	50 g
2586	Trace Elements in Soil Containing Lead From Paint (Nominal 500 mg/kg Lead)	55 g
2587	Trace Elements in Soil Containing Lead From Paint (Nominal 3000 mg/kg Lead)	55 g
2700	Hexavalent Chromium in Contaminated Soil (Low Level)	75 g
2701	Hexavalent Chromium in Contaminated Soil (High Level)	75 g
2702	Inorganics in Marine Sediment	50 g
2703	Sediment for Solid Sampling (Small Sample) Analytical Techniques	5 g
2706	New Jersey Soil, Organics and Trace Elements	50 g
2709a	San Joaquin Soil	50 g
2710a	Montana I Soil	50 g
2711a	Montana II Soil	50 g
2780a	Hard Rock Mine Waste	50 g
2781	Domestic Sludge	40 g
2782	Industrial Sludge	70 g
8704	Buffalo River Sediment	50 g

See [Table 111.7](#) on the website for more information.



# Small Creatures, Big Health Impact!

## RM 8037 Krill Oil

May 12, 2020


**What:** RM 8037 is a reference material that consists of oil made from Antarctic krill. Each unit of RM 8037 contains three tins, each with approximately 4.5 mL of krill oil.

**Why:** Krill oil contains high levels of omega-3 fatty acids, including DHA and EPA, that exist as phospholipids, and have many potential health benefits. In addition, phospholipids provide a unique challenge to fatty acid measurements which often focus on analysis of neutral lipids like triglycerides.

**Who:** Analytical laboratories that analyze phospholipid-rich dietary supplements for fatty acid content would use the reference material to validate methods.

**How:** Laboratories should use the reference material with their own fatty acid measurements to evaluate method performance.



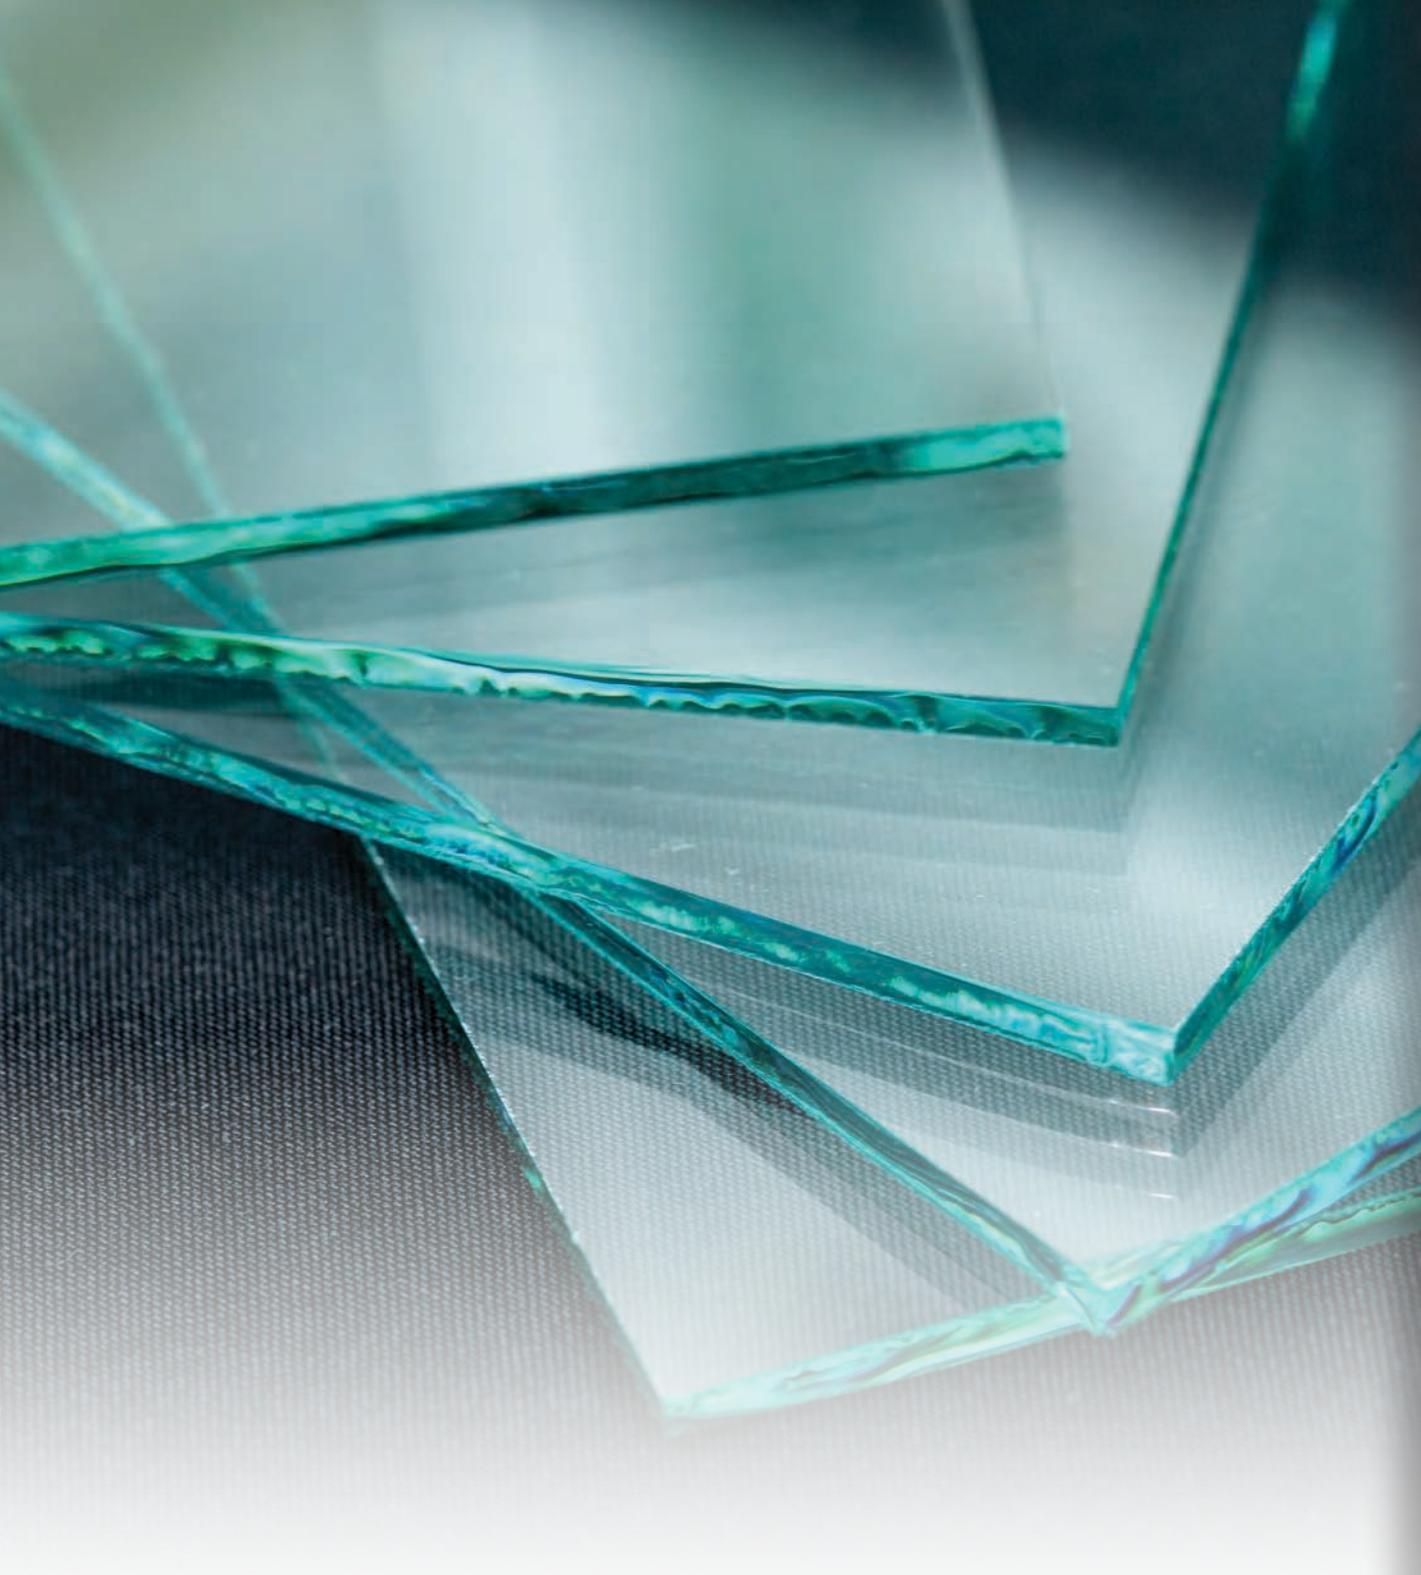

# Standard Reference Materials for Chemical Composition **Ceramics & Glasses**

---



### Nitrides (powder form)

SRM	Description	Unit of Issue
8983	Silicon Nitride	4.5 g

See [Table 112.1](#) on the website for more information.

### Cemented Carbides (powder form)

SRMs 887-889 are prepared from sintered tungsten carbide base materials.

SRM	Description	Unit of Issue
887	Cemented Carbide (W-83,Co-10)	100 g
888	Cemented Carbide (W-64,Co-25,Ta-5)	100 g
889	Cemented Carbide (W-75,Co-9,Ta-5,Ti-4)	100 g

See [Table 112.2](#) on the website for more information.

### Glasses (powder and solid forms)

SRM	Description	Unit of Issue
80a	Soda-Lime Glass (beads)	45 g
81a	Glass Sand	75 g
89	Glass, Lead Barium	45 g
92	Soda-Lime Glass, Low Boron (powder)	45 g
93a	Borosilicate Glass	1 wafer
165a	Glass Sand	75 g
606	Trace Elements in Basalt Glass	glass mounted in epoxy
620	Soda-Lime, Flat	set (3)
1411	Soft Borosilicate Glass	set (10)
1412a	Multicomponent Glass (disk)	set (2)
1413	High Alumina Sand	75 g
1830	Soda-Lime Float Glass (Nominal Mass Fraction 0.1 % $Al_2O_3$ )	3 platelets
1831	Soda-Lime Sheet Glass (Nominal Mass Fraction 1.2 % $Al_2O_3$ )	3 platelets
2696	Silica Fume (powder)	70 g

See [Table 112.3](#) on the website for more information.

### Trace Elements (wafer form)

These SRMs are for calibrating instruments and evaluating analytical techniques used to determine trace elements in inorganic matrices. NOTE: The nominal glass composition of SRMs 610 through 617 is 72 %  $SiO_2$ , 12 % CaO, 14 %  $Na_2O$ , and 2%  $Al_2O_3$ .

SRM	Description	Unit of Issue
606	Trace Elements in Basalt Glass	glass mounted in epoxy
610	Trace Elements in Glass	4 wafers
611	Trace Elements in Glass	4 wafers
612	Trace Elements in Glass	4 wafers
613	Trace Elements in Glass	4 wafers
614	Trace Elements in Glass	4 wafers
616	Trace Elements in Glass	4 wafers
617	Trace Elements in Glass	4 wafers

See [Table 112.4](#) on the website for more information.





# Standard Reference Materials for Chemical Composition

## **Cement**

### Cements and Related Materials (powder form)

These portland (1880b, 1881b, 1884b, 1885b, 1886a, 1887b, 1888b, and 1889b) and calcium aluminate (1882a and 1883a) cement SRMs are for x-ray spectroscopic and chemical analysis of cements and related materials.

SRM	Description	Unit of Issue
633a	Portland Cement	4 x 5 g
634a	Portland Cement	100 g
635a	Portland Cement (Blended with Slag)	5 x 5 g
1880b	Portland Cement	5 x 5 g
1881b	Portland Cement (Blended with Fly Ash)	5 x 5 g
1882a	Calcium Aluminate Cement	4 x 5 g
1883a	Calcium Aluminate Cement	4 x 5 g
1884b	Portland Cement	5 x 4.5 g
1885b	Portland Cement	5 x 5 g
1886a	Portland Cement (White Portland Cement with Low Iron)	4 x 5 g
1886b	White Portland Cement	5 x 5 g
1887b	Portland Cement	5 x 4 g
1888b	Portland Cement	4 x 5 g
1889b	Portland Cement (Blended with Limestone)	5 x 5 g
2429	Flue Gas Desulfurization Gypsum	200 g
2696	Silica Fume	70 g

See [Table 113.1](#) on the website for more information.

### Portland Cement Clinkers (solid form)

These SRMs provide certified values for the abundance of major phases in cement clinkers, i.e., the percentages of alite ( $C_3S$ ), belite ( $C_2S$ ), aluminate ( $C_3A$ ), and ferrite ( $C_2(A,F)$ ). NOTE: In cement chemist notation, C= $CaO$ , S= $SiO_2$ , A= $Al_2O_3$  and F= $Fe_2O_3$ .

SRM	Description	Unit of Issue
2686a	Portland Cement Clinker	4 x 7 g
2687a	Portland Cement Clinker	5 x 8 g
2688	Portland Cement Clinker	3 x 10 g

See [Table 113.2](#) on the website for more information.





# Standard Reference Materials for Chemical Composition **Engine Wear Materials**


---



### Lubricating Oils

SRM	Description	Unit of Issue
1085c	Wear Metals in Lubricating Oil	set (10)
1818a	Chlorine in Lubricating Base Oils	set (5)
1819a	Sulfur in Lubricating Base Oil	set (5)
1848	Lubricating Oil Additive Package	100 g

See [Table 114.2](#) on the website for more information.

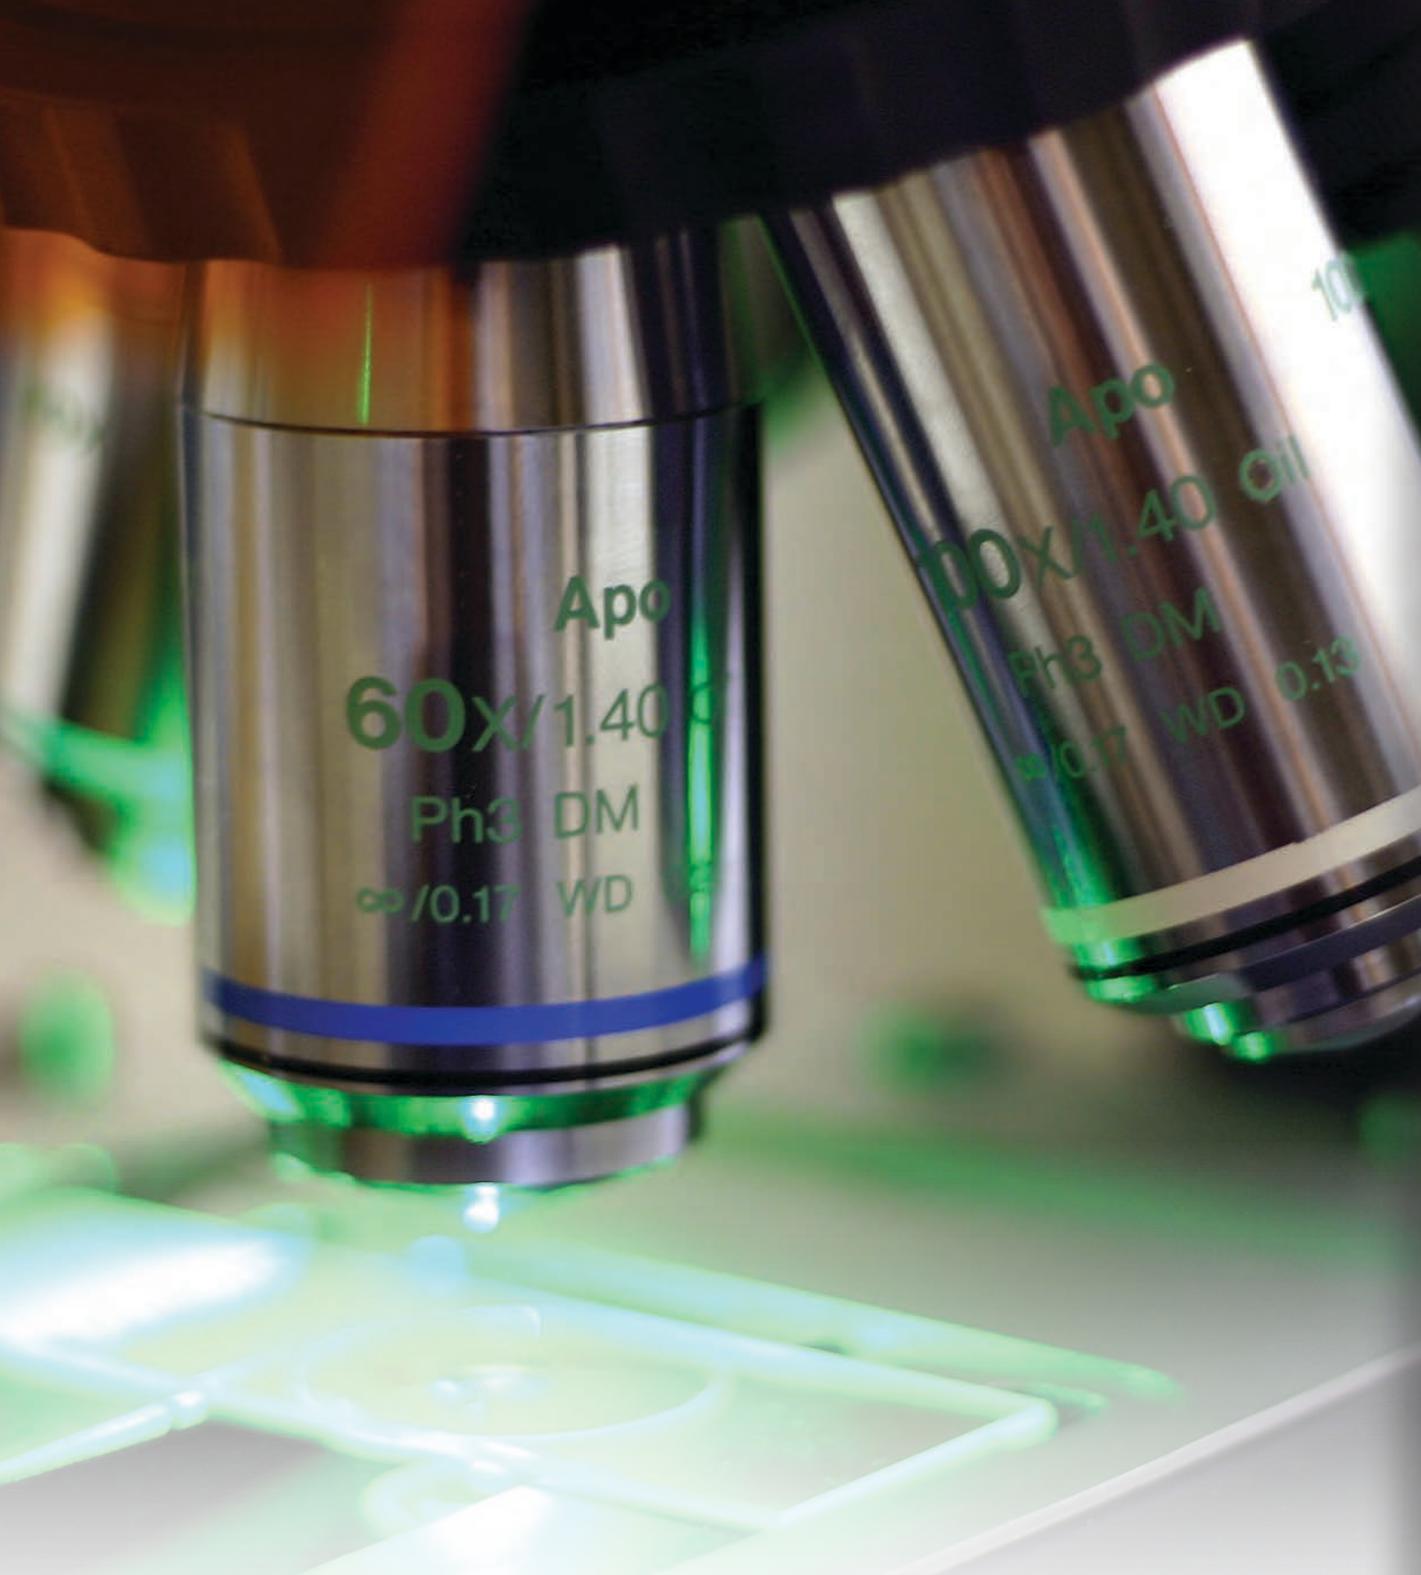

# Standard Reference Materials for Chemical Composition

## Forensics



## Ethanol Solutions

SRM	Description	Unit of Issue
<b>1828c</b>	Ethanol-Water Solutions	set (6)
<b>2891</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.02 %)	5 x 1.2 mL
<b>2892</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.04 %)	5 x 1.2 mL
<b>2893a</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.08 %)	5 x 1.2 mL
<b>2894</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.1 %)	5 x 1.2 mL
<b>2895</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.2 %)	5 x 1.2 mL
<b>2896</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.3 %)	5 x 1.2 mL
<b>2897a</b>	Ethanol Water Solution (Nominal Mass Fraction 2 %)	5 x 10 mL
<b>2898a</b>	Ethanol Water Solution (Nominal Mass Fraction 6 %)	5 x 10 mL
<b>2899a</b>	Ethanol-Water Solution (Nominal Mass Fraction 25 %)	5 x 10 mL
<b>2900</b>	Ethanol-Water Solution (Nominal Mass Fraction 95.6 %)	5 x 10 mL

See [Table 105.3](#) on the website for more information.

## Drugs of Abuse and Smoking Metabolites and Contaminates (urine)

SRM	Description	Unit of Issue
<b>1507b</b>	THC-9-COOH in Freeze-Dried Urine	set (3)

See [Table 105.7](#) on the website for more information.

## Crime Scene Investigations

SRM	Description	Unit of Issue
<b>2285</b>	Ignitable Liquids Test Mixture	5 x 1.2 mL
<b>2460a</b>	Standard Bullet Replica	each
<b>2461</b>	Standard Cartridge Case	each

See [Table 109.4](#) on the website for more information.

## DNA Profiling and Nucleic Acid Materials (solid forms)

SRM	Description	Unit of Issue
<b>2372a</b>	Human DNA Quantitation Standard	set (3)
<b>2374</b>	DNA Sequence Library for External RNA Controls	96 tubes
<b>2391d</b>	PCR-Based DNA Profiling Standard	set (5)
<b>2392</b>	Mitochondrial DNA Sequencing (Human)	set (3)
<b>2392-I</b>	Mitochondrial DNA Sequencing (Human HL-60 DNA)	1 vial
<b>2396</b>	Oxidative DNA Damage Mass Spectrometry Standards	set (10)
<b>8375</b>	Microbial Genomic DNA Standards for Sequencing Performance Assessment (MG-001, MG-002, MG-003, MG-004)	set (4)

See [Table 105.8](#) on the website for more information.



# Standard Reference Materials for Chemical Composition

## **Ion Activity**

## pH Calibration (powder form)

These SRMs are used to prepare solutions of known hydrogen ion activity to calibrate commercial pH instruments. SRMs 186g and 191d are each certified for use as an admixture only. SRM 186g (186-I-g and 186-II-g) may be used to prepare solutions with a pH of 6.8640 at 25°C, or physiological buffer solutions with a pH of 7.4157 at 25°C.

SRM	Description	Unit of Issue
185i	Potassium Hydrogen Phthalate	60 g
186g	Potassium Dihydrogen Phosphate (186-I-g) Disodium Hydrogen Phosphate (186-II-g)	1 x 30 g; 1 x 45 g
187f	Sodium Tetraborate Decahydrate (Borax)	30 g
188	Potassium Hydrogen Tartrate	60 g
189c	Potassium Tetroxalate Dihydrate	65 g
191d	Sodium Bicarbonate (191d-I) Sodium Carbonate (191d-II)	1 x 25 g; 1 x 30 g
2193a	Calcium Carbonate [used as saturated Ca(OH) <sub>2</sub> solution]	30 g

See [Table 201.1](#) on the website for more information.

## Biological Buffer Systems (powder form)

These SRMs are used to calibrate clinical instruments (e.g., blood pH measurements), in the range of pH 7 to 8. They are each certified for use as an admixture only. The pH(S) values for the buffer solutions are certified at 0.05 molal and 0.08 molal with respect to the free acid and the sodium salt admixture as a function of temperature.

SRM	Description	Unit of Issue
2181	HEPES	60 g
2182	HEPES Sodium Salt	60 g

See [Table 201.2](#) on the website for more information.

## pD Calibration (powder form)

These SRMs are for the preparation of solutions of known deuterium ion activity to calibrate pH instruments to indicate pD data. SRMs 2186-I and 2186-II, and 2191a and 2192a are certified for use as admixtures only.

SRM	Description	Unit of Issue
2185	Potassium Hydrogen Phthalate pD Standard	60 g
2186I	Potassium Dihydrogen Phosphate	30 g
2186II	Disodium Hydrogen Phosphate	30 g
2191a	Sodium Bicarbonate	30 g
2192a	Sodium Carbonate	30 g


See [Table 201.3](#) on the website for more information.

## Ion-Selective Electrode Calibration (powder form)

These SRMs are certified for the calibration of ion-selective electrodes and have conventional ionic activities based on the Stokes-Robinson hydration theory for ionic strengths greater than 0.1 mol/L.

SRM	Description	Unit of Issue
2201	Sodium Chloride (Ion-Selective)	125 g
2203	Potassium Fluoride (Standard for Ion-Selective Electrodes)	125 g

See [Table 201.4](#) on the website for more information.

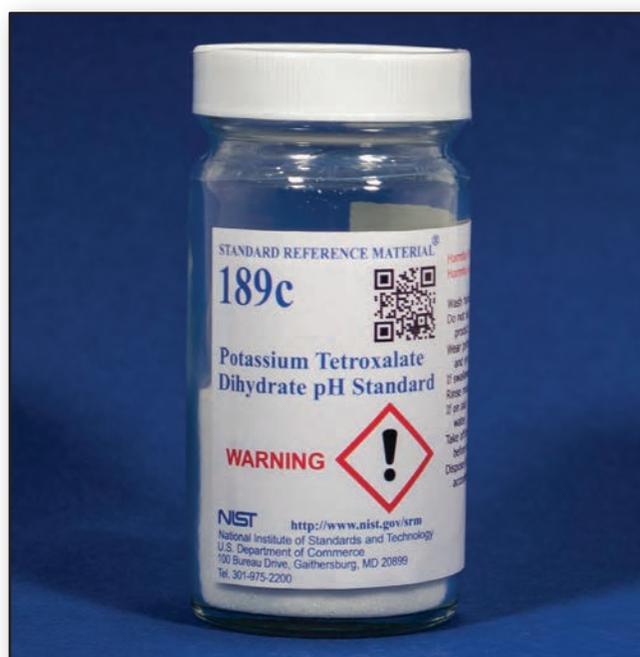



# Standard Reference Materials for Chemical Composition

## **Polymeric Properties**

---

## Polymers (liquid, pellet, and powder forms)

These SRMs are for the calibration of instrumentation used in polymer technology science for the determination of molecular weight and molecular weight distribution and as characterized samples for other physical properties of polymers.

## Polymers

SRM	Description	Unit of Issue
705a	Polystyrene (Narrow Molecular Weight Distribution)	5 g
706a	Polystyrene (Broad Molecular Mass Distribution)	18 g
1473c	Low Density Polyethylene Resin	60 g
1474b	Polyethylene Resin	60 g
1475a	Polyethylene, Linear	50 g
1476a	Branched Polyethylene Resin	12 g
1478	Polystyrene (Narrow Molecular Weight Distribution)	2 g
1479	Polystyrene (Narrow Molecular Weight Distribution)	2 g
1482a	Linear Polyethylene Narrow Molecular Mass Distribution (Nominal Mass-Average Molar Mass of 13 600 g/mol)	0.3 g
1483a	Linear Polyethylene Narrow Molecular Mass Distribution (Nominal Mass-Average Molar Mass of 32 100 g/mol)	0.3 g
1484a	Linear Polyethylene	0.3 g
1488	Poly (Methyl Methacrylate) (29 K Narrow Molecular Weight Distribution)	2 g
2885	Polyethylene (Mass-Average Molar Mass [Mw] 6 280 g/mol)	0.3 g
2886	Polyethylene (Mass-Average Molar Mass [Mw] 87 000 g/mol)	0.3 g
2887	Polyethylene (Mass-Average Molar Mass [Mw] 196 400 g/mol)	0.3 g

See [Table 202.1](#) on the website for more information.

## Melt Flow Rate

SRM	Description	Unit of Issue
1496	Unpigmented Polyethylene Gas Pipe Resin	0.9 kg

See [Table 202.1](#) on the website for more information.

## Viscosity

SRM	Description	Unit of Issue
2492	Bingham Paste Mixture for Rheological Measurements	kit for two batches
2493	Bingham Mortar Mixture for Rheological Measurements	kit for two batches
2497	Bingham Concrete Mixture for Rheological Measurements	kit for one batch

See [Table 202.1](#) on the website for more information.



# Standard Reference Materials for Chemical Composition **Thermodynamic Properties**

---





## Combustion Calorimetry (powder form)

These SRMs are for use as standards for calibration of combustion bomb calorimeters used in checking the performance of apparatus and analytical procedures.

SRM	Description	Unit of Issue
39j	Benzoic Acid Calorimetric Standard	30 g
1656	Thianthrene Combustion Calorimetric Standard	30 g
1657	Synthetic Refuse-Derived Fuel Combustion Calorimetric Standard	100 g
2152	Urea Combustion Calorimetric Standard	25 g

See [Table 203.1](#) on the website for more information.

## Solution Calorimetry

This SRM is for calibration and validation of differential scanning calorimeters, differential thermal analyzers, and similar instruments.

SRM	Description	Unit of Issue
1655	Potassium Chloride, KCl (cr) for Solution Calorimetry	30 g

See [Table 203.2](#) on the website for more information.

## Differential Scanning Calorimetry and Differential Thermal Analysis

These SRMs are intended for calibration and validation of differential scanning calorimeters, differential thermal analyzers, and similar instruments.

SRM	Description	Unit of Issue
2232	Indium DSC Calibration Standard - Temperature and Enthalpy of Fusion	1 g
2234	Gallium for Thermal Analysis	2 g
2235	Bismuth for Thermal Analysis	1.5 g

See [Table 203.5](#) on the website for more information.

## Enthalpy and Heat Capacity

SRM	Description	Unit of Issue
705a	Polystyrene (Narrow Molecular Weight Distribution)	5 g
720	Sapphire Heat Capacity	15 g
781D2	Molybdenum - Heat Capacity (rod form)	6.4 mm D

See [Table 203.5](#) on the website for more information.

## Thermal Analysis Purity Set

SRM 1514 is for evaluating methods of determining purity by differential scanning calorimetry. It consists of pure phenacetin and phenacetin doped with p-aminobenzoic acid.

SRM	Description	Unit of Issue
1514	Thermal Analysis Purity Set	set (4)

See [Table 203.5](#) on the website for more information.

## Defining Fixed Point, International Temperature Scale of 1990, ITS-90 (solid forms)

These SRMs are for use in preparing defining fixed points of the International Temperature Scale of 1990, ITS-90.

SRM	Description	Unit of Issue
740a	Zinc Freezing-Point Standard 419.527 °C	200 g
741a	Tin Freezing-Point Standard	200 g
1746	Silver Freezing-Point Standard	300 g

See [Table 203.8](#) on the website for more information.



## Reference Points (solid forms)

These moderate purity SRMs are for use in preparing reference point devices and for calibrating thermometers, thermocouples and other temperature measuring devices.

SRM	Description	Unit of Issue
45d	Copper Secondary Freezing Point Standard	450 g
49e	Lead Secondary Freezing Point Standard	600 g
742	Aluminum Oxide Pyrometric Standard	10 g

See [Table 203.10](#) on the website for more information.

## Freezing Point, Melting Point, and Triple Point Cells (solid forms)

These SRM fixed point devices are for use in the realization of internationally accepted secondary reference points and/or triple points. They are not intended for calibration of differential scanning calorimeters.

SRM	Description	Unit of Issue
1968	Gallium Melting-Point Standard	25 g
1972	1,3-Dioxolan-2-one Triple Point Standard	60 g

See [Table 203.11](#) on the website for more information.

## Thermocouple Materials and Thermometers

SRM	Description	Unit of Issue
1749	Gold versus Platinum Thermocouple Certified Thermometer	each
1967a	High-Purity Platinum Thermoelement (platinum wire)	0.51 mm D x 1 m L

See [Table 203.13](#) on the website for more information.

## Thermal Conductivity of Iron (rod form), Fibrous Glass, and Polystyrene

SRM	Description	Unit of Issue
1450e	Thermal Conductivity - Fibrous Glass Board	each
1453	Thermal Conductivity - Expanded Polystyrene Board	each
8420	Electrolytic Iron	0.64 cm D x 5 cm L

See [Table 203.15](#) on the website for more information.

## Thermal Expansion of Metal, Glass (rod form)

SRM	Description	Unit of Issue
731L1	Borosilicate Glass - Thermal Expansion	5 cm
731L2	Borosilicate Glass - Thermal Expansion	10 cm
731L3	Borosilicate Glass - Thermal Expansion	15 cm

See [Table 203.16](#) on the website for more information.

## Thermal Resistance Properties of Fibrous Glass and Fumed Silica Board


SRM	Description	Unit of Issue
1452	Thermal Resistance - Fibrous Glass Blanket for High Precision Measurements	each
1459	Thermal Resistance - Fumed Silica Board	each

See [Table 203.17](#) on the website for more information.

## Thermoelectric Materials

SRM	Description	Unit of Issue
3451	Low Temperature Seebeck Coefficient Standard	bar

See [Table 203.18](#) on the website for more information.

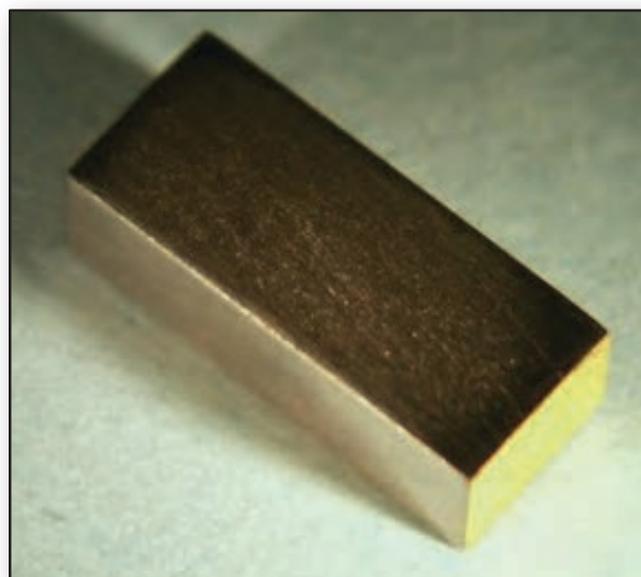

SRM 3451 Low-Temperature Seebeck Coefficient Standard

# NIST Measurement Services Websites of Interest

## Standard Reference Materials




### Standard Reference Materials

<https://www.nist.gov/srm>

### Historical Archived Certificates/Reports of Investigation

<https://www-s.nist.gov/srmors/certArchive.cfm>

## Standard Reference Data



### NIST Scientific and Technical Databases

<https://www.nist.gov/srd>

### NIST Data Gateway

<https://srdata.nist.gov/gateway>

### NIST Data Portal

<https://data.nist.govgb>

## Calibrations



### Calibrations Services


<https://www.nist.gov/calibrations>

## Standard Reference Instruments



### Standard Reference Instruments

<https://www.nist.gov/srm/standard-reference-instruments.cfm>

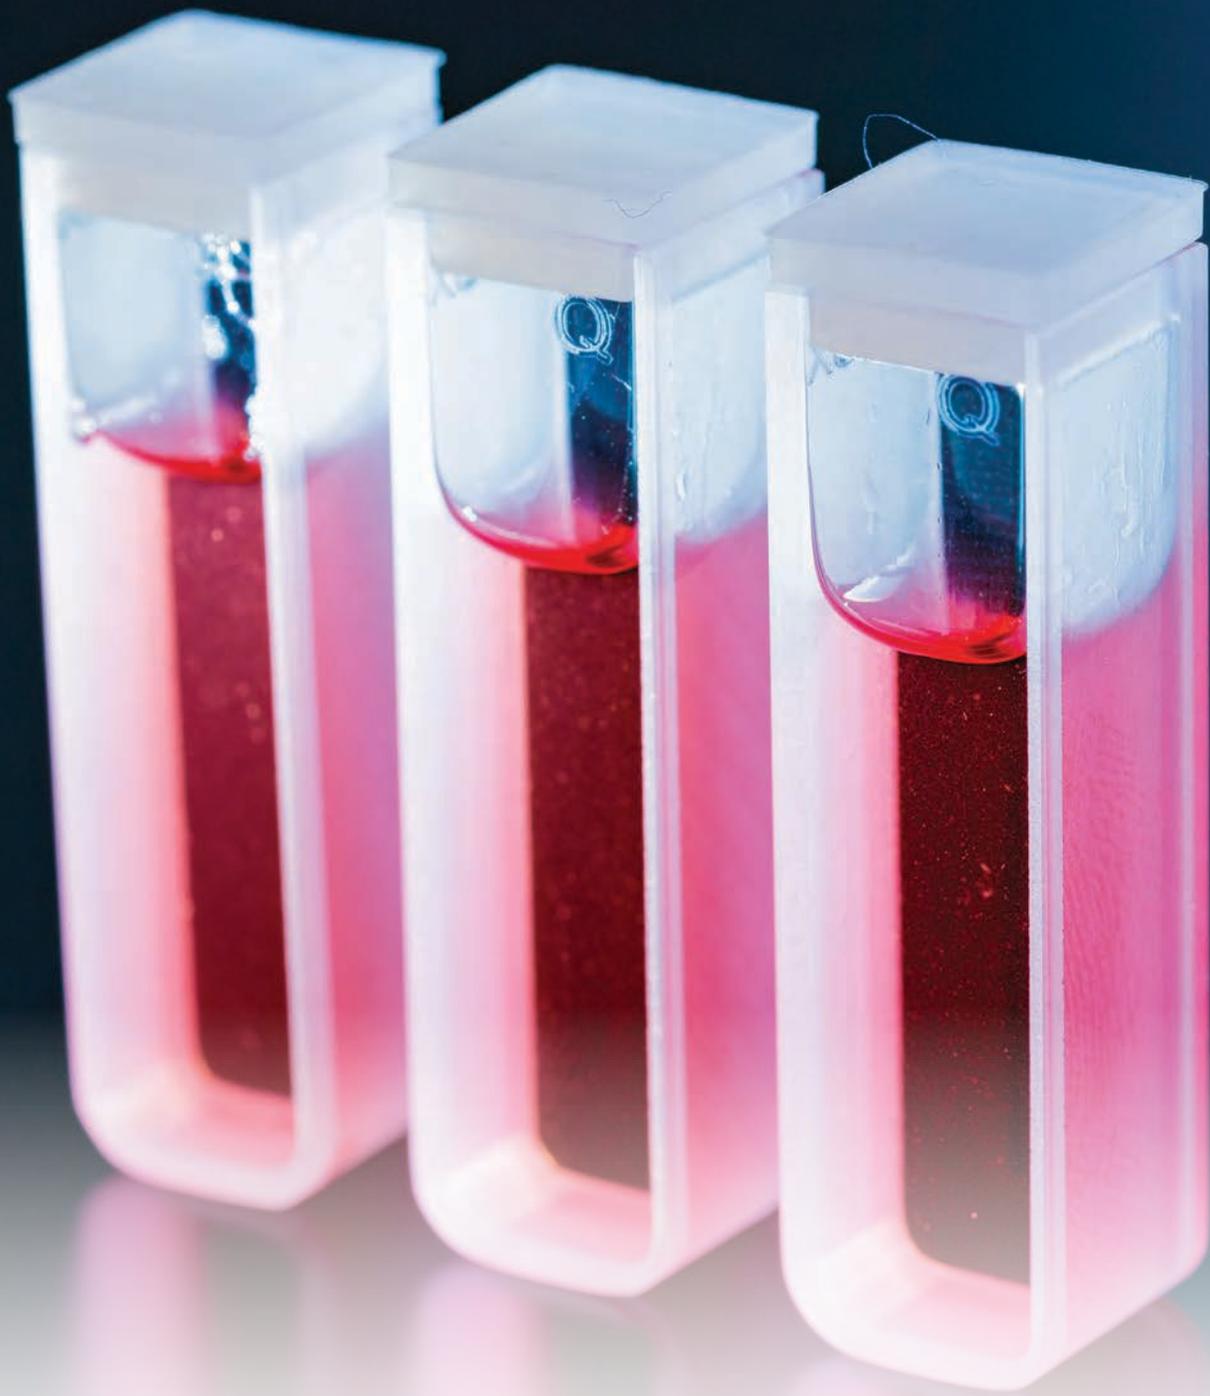

# Standard Reference Materials for Chemical Composition

## **Optical Properties**





## Molecular Absorption (film, filter, solid, and solution forms)

The optical SRMs for spectrophotometry are certified transfer standards that fall into three general categories: transmittance, wavelength, and stray radiant energy; each of which addresses a specific instrumental parameter of an absorption spectrometer that must be in control for accurate optical transmittance measurements. To obtain optimum verification results, each SRM must be used within the specified range of conditions for which it is intended.

SRM	Description	Unit of Issue
931h	Liquid Absorbance Filters, UV-VIS	set (12)
935a	Potassium Dichromate (Ultraviolet Absorbance Standard)	15 g
1921b	IR Transmission Wavelength/Wavenumber Standard (Polystyrene Film)	1 card
1928	Infrared Specular High Reflectance Standard (Nominal Diameter 51 mm)	disk
1929	Infrared High Reflectance Specular Standard (Nominal Diameter 25 mm)	disk
2031c	Metal-on-Fused-Silica Neutral Density Filters (250 nm to 635 nm)	set (3)
2034	Holmium Oxide Solution Wavelength Standard from 240 nm to 650 nm	Cuvette
2035b	Ultraviolet-Visible-Near-Infrared Wavelength/Wavenumber Transmission Standard	each
2036	Near Infrared Wavelength/Wavenumber Reflection Standard	each
2082	Pathlength Absorbance Standards for Microliter Volume Spectrophotometers	set (3)

See [Table 204.1](#) on the website for more information.

## Infrared Reflectance (solid form)

SRM	Description	Unit of Issue
2036	Near Infrared Wavelength/Wavenumber Reflection Standard	each

See [Table 204.2](#) on the website for more information.

## Optical Rotation (powder form)

SRM 17f is intended for calibrating or checking polarimetric apparatus. In aqueous solution, the optical rotation of SRM 17f is value assigned at four wavelengths.

SRM	Description	Unit of Issue
17f	Sucrose Optical Rotation	60 g

See [Table 204.2](#) on the website for more information.

## Fluorescence and Raman Spectroscopy

SRM	Description	Unit of Issue
1932	Fluorescein Solution	3 x 2 mL
1934	Fluorescent Dyes for Quantitative Flow Cytometry (Visible Spectral Range)	set (4)
2241	Relative Intensity Correction Standard for Raman Spectroscopy: 785 nm Excitation	each
2242a	Relative Intensity Correction Standard for Raman Spectroscopy: 532 nm Excitation	each
2244	Relative Intensity Correction Standard for Raman Spectroscopy: 1064 nm Excitation	each
2245	Relative Intensity Correction Standard for Raman Spectroscopy: 633 nm Excitation	each
2246	Relative Intensity Correction Standard for Raman Spectroscopy: 830 nm Excitation	each
2940a	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Orange Emission	each
2941a	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Green Emission	each
2942	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Ultraviolet Emission	each
2943	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Blue Emission	each
2944	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Red Emission	each


See [Table 204.2](#) on the website for more information.

## Photography (chart form)

SRM 1010a is used to test the resolving power of cameras or of whole microcopying systems. It consists of 5 charts printed photographically on paper, that have 26 high-contrast, 5-line patterns ranging in spatial frequency of 1 mm<sup>-1</sup> to 18 mm<sup>-1</sup>.

SRM	Description	Unit of Issue
1010a	Microcopy Resolution Test Charts	set (5)


See [Table 204.2](#) on the website for more information.

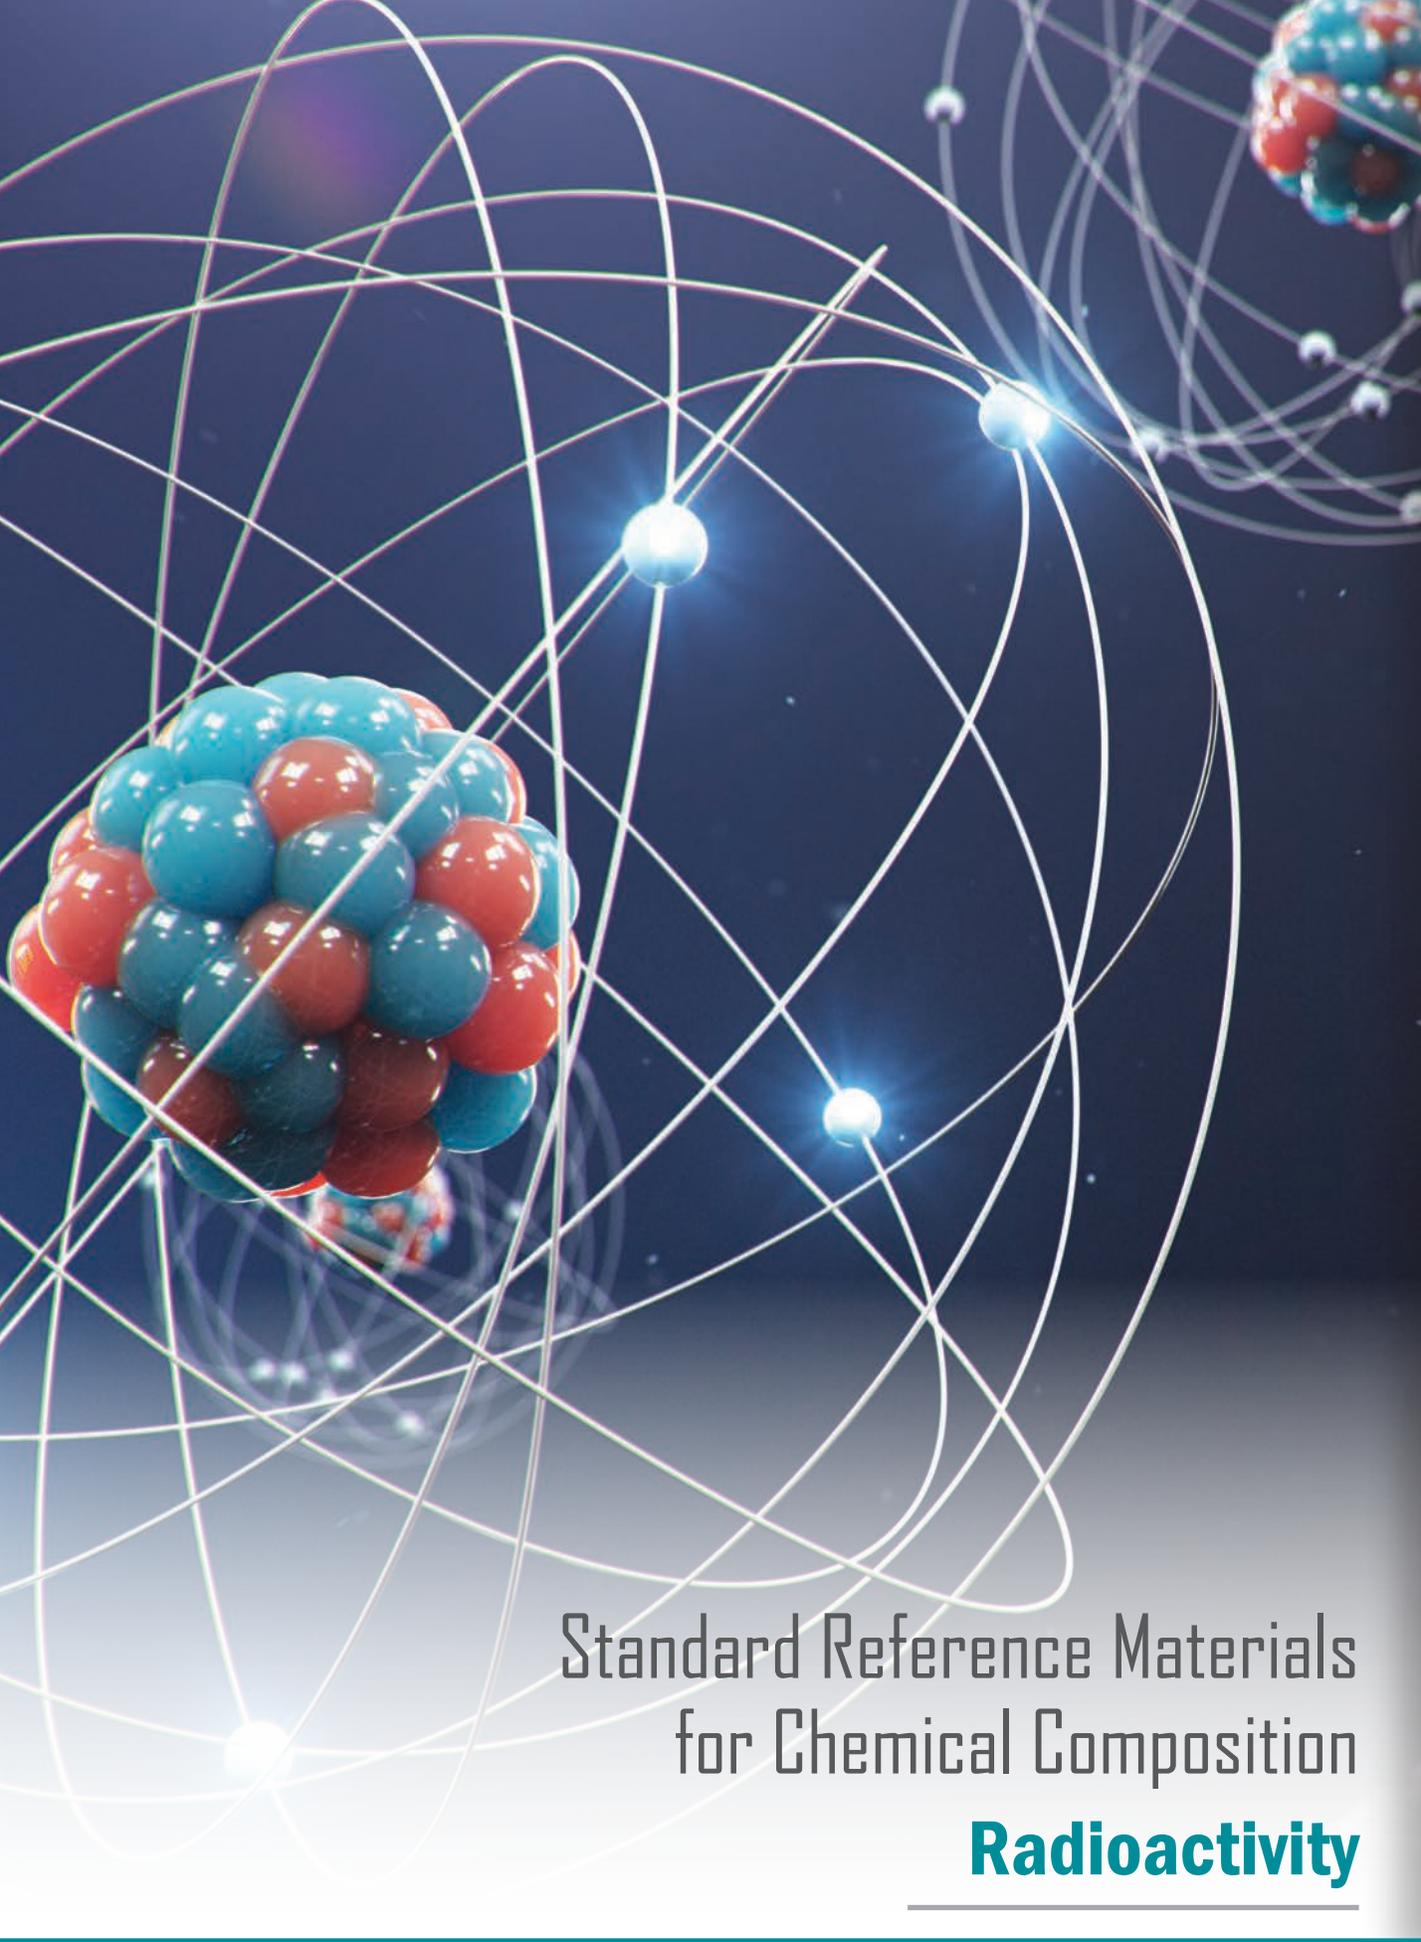

# Standard Reference Materials for Chemical Composition

## **Radioactivity**





## Radiation Dosimetry (wire form)

This SRM is a cobalt-in-aluminum alloy wire 0.5 mm in diameter and 1 m in length for use as a neutron density monitor standard.

“Radionuclide Calibration Services”

SRM	Description	Unit of Issue
953	Neutron Density Monitor Wire	1 m

See [Table 205.1](#) on the website for more information.

## Special Nuclear Materials

The U.S. Department of Energy New Brunswick Laboratory issues special nuclear reference materials as NBL Certified Reference Materials (CRMs). These CRMs include the plutonium and uranium assay and isotopic materials previously issued by the National Institute of Standards and Technology. All orders or inquiries should be addressed to: U.S. Department of Energy, New Brunswick Laboratory, 9800 S. Cass Avenue, Bldg. 350, Argonne, IL 60439-4899. Attn: Reference Materials Sales; Phone (630) 252-2767; Fax (630) 252-6256; E-mail [usdoe.nbl@ch.doe.gov](mailto:usdoe.nbl@ch.doe.gov)

## Radioactive Solutions

These SRMs are intended for the calibration of radioactivity measuring instruments and for the monitoring of chemical and geochemical processes. They are calibrated in terms of activity per gram of solution. Each SRM is contained in a flame-sealed glass ampoule or bottle and, except as noted, consists of the radionuclide dissolved in an aqueous solution (usually acidic).

When an import permit for radioactive material is required of a customer outside the U.S., NIST must have a copy to complete an order and facilitate shipment.

SRM	Description	Unit of Issue
4222d	Carbon-14-n-hexadecane Radioactivity Standard	5 mL
4226d	Nickel-63 Radioactivity Standard	5 mL
4233f	Cesium-137 Radioactivity Standard	5 mL
4239	Strontium-90 Radioactivity Standard	5 mL
4251d	Barium-133 Radioactivity Standard	5 mL
4274	Holmium-166m Gamma-ray Emission Rate Standard	5 mL
4288b	Technetium-99 Radioactivity Standard	5 mL

SRM	Description	Unit of Issue
4320b	Curium-244 Radioactivity Standard	5 mL
4321d	Natural Uranium Radioactivity Standard	5 mL
4322d	Americium-241 Radioactivity Standard	5 mL
4323c	Plutonium-238 Radioactivity Standard	5 mL
4324b	Uranium-232 Radioactivity Standard	5 mL
4326a	Polonium-209 Radioactivity Standard	5 mL
4328c	Thorium-229 Radioactivity Standard	5 mL
4329a	Curium-243 Radioactivity Standard	5 mL
4330c	Plutonium-239 Radioactivity Standard	3 mL
4332e	Americium-243 Radioactivity Standard	5 mL
4334j	Plutonium-242 Radioactivity Standard	5 mL
4337	Lead-210 Radioactivity Standard	5 mL
4338a	Plutonium-240 Radioactivity Standard	5 mL
4339b	Radium-228 Radioactivity Standard	5 mL
4340b	Plutonium-241 Radioactivity Standard	5 mL
4341a	Neptunium-237 Radioactivity Standard	5 mL
4342a	Thorium-230 Radioactivity Standard	5 mL
4361c	Hydrogen-3 Radioactivity Standard	500 mL
4370d	Europium-152 Radioactivity Standard	5 mL
4915f	Cobalt-60 Radioactivity Standard	5 mL
4919l	Strontium-90 Radioactivity Standard	5 mL
4926e	Hydrogen-3 Radioactivity Standard	20 mL
4927g	Hydrogen-3 Radioactivity Standard	5 mL
4929f	Iron-55 Radioactivity Standard	5 mL
4943	Chlorine-36 Radioactivity Standard	3 mL
4949d	Iodine-129 Radioactivity Standard	5 mL
4965a	Radium-226 Radioactivity Standard	5 mL
4966a	Radium-226 Radioactivity Standard	5 mL
4967a	Radium-226 Radioactivity Standard	5 mL
4969	Radium-226 Radioactivity Standard	5 mL

See [Table 205.4](#) on the website for more information.



### Radiopharmaceuticals (solution and gaseous forms)

These SRMs are intended for the calibration of radioactivity-measuring instruments. They are calibrated in terms of activity per gram of solution (except SRM 4415, which is calibrated in terms of activity). Each SRM is contained in a 5 mL flame-sealed glass ampoule and, except for SRM 4415, consists of the radionuclide dissolved in an aqueous solution (usually acidic). These SRMs are produced in collaboration with the NRMAP, Inc. and, because of the short half lives, are available only at specific times.


When an import permit for radioactive material is required of a customer outside the U.S., NIST must have a copy to complete an order and facilitate shipment.

SRM	Description	Unit of Issue	Approximate Activity	Half Life (days)	Month Produced*
4401L	Iodine-131 Radioactivity Standard	5 mL	5 MBq/g	8	February
4404L	Thallium-201 Radioactivity Standard	5 mL	10 MBq/g	3	June
4407L	Iodine-125 Radioactivity Standard	5 mL	5 MBq/g	59.4	December
4410H	Technetium-99m Radioactivity Standard	5 mL	1.0 GBq/g	0.3	September
4412L	Molybdenum-99 Radioactivity Standard	5 mL	10 MBq/g	2.74	April
4415L	Xenon-133 Radioactivity Standard	5 mL	150 MBq/g	5.243	September
4416L	Gallium-67 Radioactivity Standard	5 mL	5 MBq/g	3.3	May
4417L	Indium-111 Radioactivity Standard	5 mL	10 MBq/g	2.8	August
4427L	Yttrium-90 Radioactivity Standard	5 mL	5 MBq/g	2.67	October

See [Table 205.5](#) on the website for more information.

\*Check the website for details as to the order date deadline for these SRMs.

For information on the NRMAP/NIST Program, see <https://www-s.nist.gov/srmors/certificates/documents/NRMAP-PharmBroch2012.pdf>



## Carbon-14 Dating (solid form)

This SRM is an international standard for contemporary carbon-14 against which world-wide measurements can be compared. Each SRM consists of approximately 225 g of a 450 kg lot of oxalic acid prepared by fermentation of French beet molasses from the 1977 spring, summer, and autumn harvests.

SRM	Description	Unit of Issue
4990C	Oxalic Acid	8 x 28 g

See [Table 205.7](#) on the website for more information.

## Radioactive Natural Matrix Materials (powder form)

SRM	Description	Unit of Issue
4350B	River Sediment Environmental Radioactivity Standard	85 g
4351	Human Lung Environmental Radioactivity Standard	45 g
4352	Human Liver Environmental Radioactivity Standard	45 g
4353A	Rocky Flats Soil Number 2	75 g
4354	Lake Sediment Environmental Radioactivity Standard	25 g
4355	Peruvian Soil Powder	75 g
4356	Ashed Bone Environmental Radioactivity Standard	15 g
4357	Ocean Sediment Powder	85 g
4358	Ocean Shellfish Radionuclide Standard	150 g
4359	Seaweed Radionuclide Standard	300 g

See [Table 205.11](#) on the website for more information.

## Considering a Radioactive SRM(s) Order?

Start by submitting a request to our SRM Sales Office via email ([srminfo@nist.gov](mailto:srminfo@nist.gov)). After it has been received, you will be contacted for any additional information needed. Based on the regulations that apply to you as a customer either *within the United States* (United States includes Puerto Rico and all territories and possessions of the United States) or *outside the United States*, NIST will determine if your request can be cleared for processing. Requirements for the different customer locations are outlined below.

### *Customers in Organizations within the United States:*

If the material(s) requested is/are subject to license requirements by the Nuclear Regulatory Commission (NRC), then prior to shipment NIST is required by law to verify the domestic customer's authorization to receive and possess radioactive material. Once NIST makes a determination, you will be notified with the disposition of your request. For approved requests, your order confirmation or quote will be forwarded to you.

### *Customers in Organizations outside the United States:*

- **Import permit for radioactive material:** Your country may require an import permit for radioactive material. Prior confirmation of your import permit status is necessary for the disposition of your request.
  - If your country *requires an import permit*, NIST must have a copy in order to complete your order and facilitate shipment with the carrier.
- **Export controls:** NIST is required to determine if your country is subject to export controls as determined by the Nuclear Regulatory Commission (NRC) and the U.S. Department of Commerce, Bureau of Industry and Security. NIST will review those controls and determine the disposition of your request.
- **Once NIST has received your import permit** (if applicable) and approved your request for export, your order confirmation or quote will be forwarded.

If you have any technical questions, please contact the NIST Radiation Physics Division at [radsrms@nist.gov](mailto:radsrms@nist.gov).



Standard Reference Materials  
for Chemical Composition  
**Electrical Properties**

---



## Electrical Resistivity and Conductivity of Iron (rod form)

SRM	Description	Unit of Issue
8420	Electrolytic Iron	0.64 cm D x 5 cm L

See [Table 206.1](#) on the website for more information.

## Superconducting Critical Current (wire form)

This SRM is for checking the performance of measurement systems used in superconductor technology. It consists of 2.2 m of a multifilamentary niobium titanium, copper-stabilized superconducting wire wound in a single layer onto a spool with a core diameter of 8.7 cm.

SRM	Description	Unit of Issue
1457	Superconducting Critical Current - Nb Ti Wire	each

See [Table 206.4](#) on the website for more information.



# Standard Reference Materials for Chemical Composition

## **Metrology**

### Scanning Electron Microscope (SEM)

This RM is for calibrating the magnification scale and evaluating the performance of scanning electron microscopes.

SRM	Description	Unit of Issue
8820	Scanning Electron Microscope Scale Calibration Artifact	each

See [Table 207.1](#) on the website for more information.

### Depth Profiling (wafer form)

SRMs 2133, 2134 and 2137 are for calibrating the secondary ion response to minor and trace element levels in a silicon matrix. SRM 2133 is certified for phosphorus; SRM 2134 is certified for arsenic; SRM 2137 is certified for boron. SRM 2135c is for calibrating equipment used to measure sputtered depth and erosion rates in surface analysis. SRM 2135c is certified for total chromium and total nickel thickness, for individual layer uniformity, for nickel/chromium bilayer uniformity, and for individual layer thickness.

SRM	Description	Unit of Issue
2133	Phosphorus Implant in Silicon Depth Profile Standard	each
2134	Arsenic Implant in Silicon Depth Profile Standard	each
2135c	Ni/Cr Thin Film Depth Profile Standard	each
2137	Boron Implant in Silicon Standard for Calibration of Concentration in a Depth Profile	each

See [Table 207.3](#) on the website for more information.





### Nonmagnetic Coating Thickness (plate form)

These SRMs are suitable for calibrating instruments used in the measurement of organics and nonmagnetic inorganic coatings over steel. They consist of fine grained copper of varying thicknesses electrodeposited onto low carbon steel substrates having the properties of AISI 1010 steel. These uniform coatings are then overplated with a thin protective layer of chromium and the total coating thickness is then certified. The thickness range covered is between 6  $\mu\text{m}$  and 2000  $\mu\text{m}$ . Each unit is also supplied with a blank substrate.

SRM	Description	Unit of Issue
1358b	Coating Thickness Standard (Nonmagnetic Coating on Steel)	set (5)
1359b	Coating Thickness Standard (Nonmagnetic Coating on Steel)	set (5)
1362b	Coating Thickness Standard (Nonmagnetic Coating on Steel)	set (5)
1363b	Coating Thickness Standard (Nonmagnetic Coating on Steel)	set (5)
1364b	Coating Thickness Standard (Nonmagnetic Coating on Steel)	set (5)

See [Table 207.5](#) on the website for more information.




### Microscale Dimensional Measurement Standards

RM 8820 is primarily intended to be used for X and Y scale (or magnification) calibrations from less than 10 times magnifications to more than 100 000 times magnifications in scanning electron microscopes (SEMs). It was designed to provide good contrast at low and high electron landing energies (accelerating voltages). Beyond testing scale calibration, it can be used for non-linearity measurements, especially at lower than 10 000 times magnifications. It can also be used for optical and scanning probe and other types of microscopes. Most SEMs require a set of calibration structures of different sizes to cover the full range of possible magnifications. This Reference Material is designed to meet that need.

SRM	Description	Unit of Issue
8820	Scanning Electron Microscope Scale Calibration Artifact	each

See [Table 207.9](#) on the website for more information.

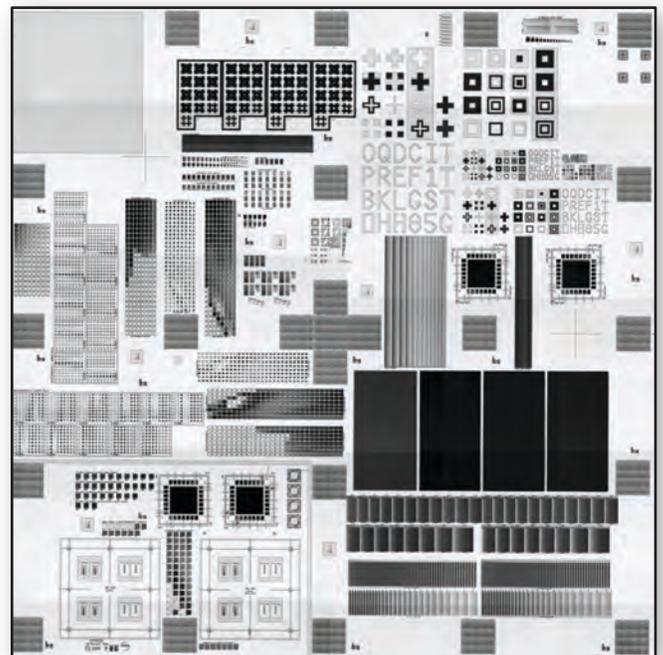

RM 8820. Optical microscope view of the 20 mm  $\times$  20 mm chip.

# New SRMs/RMs

Check out our SRM website ([www.nist.gov/srm](http://www.nist.gov/srm)) for news regarding SRMs/RMs. This includes information about newly released SRMs, RMs, Renewals and Revisions. It also has links to available resources for questions or ordering SRMs.

**Would you like to add your name to our mailing list to receive updates on New SRMs/RMs ?**

Sign up on our homepage at <https://www.nist.gov/srm> under New SRMs/RMs





# Standard Reference Materials for Chemical Composition

## **Liquids & Glasses**

---

### Chemical Resistance [Durability] of Glass (solid form)

This SRM is for checking test methods and calibrating equipment used to determine the resistance of glass containers to chemical attack.

SRM	Description	Unit of Issue
622	Soda-Lime-Silica Glass	2.2 kg

See [Table 208.1](#) on the website for more information.

### Electrical Properties of Dielectrics

SRM 624 is intended to validate test methods and for calibrating equipment used to determine the dc volume resistivity of glass per ASTM C 657.

SRM	Description	Unit of Issue
624	Lead-Silica Glass for dc Volume Resistivity	200 g

See [Table 208.2](#) on the website for more information.

### Viscosity of Glass (bar form)

SRM 717a is for checking the performance of high temperature viscosity equipment (rotating cylinders) and low temperature viscosity equipment (fiber elongation, beam bending, parallel plates, etc.).

SRM	Description	Unit of Issue
717a	Hi Boron Glass Viscosity	block

See [Table 208.3](#) on the website for more information.

### Glass Liquidus Temperature (solid form)

This SRM is for checking test methods and for calibrating equipment used to determine the liquidus temperature of glass by the gradient furnace methods per ASTM C 829.

SRM	Description	Unit of Issue
1416	Aluminosilicate Glass for Liquidus Temperature	250 g

See [Table 208.4](#) on the website for more information.

### Viscosity Fixpoints (solid forms)

These SRMs are for the calibration of equipment for the determination of the softening, annealing, and strain points of glass.

SRM	Description	Unit of Issue
709	Extra Dense Lead Glass	block
717a	Hi Boron Glass Viscosity	block

See [Table 208.5](#) on the website for more information.

### Relative Stress Optical Coefficient

SRM	Description	Unit of Issue
709	Extra Dense Lead Glass	block

See [Table 208.6](#) on the website for more information.

### Density

SRMs 211d and 2214 are for reference in the determination of the density of liquids. The certified densities were determined by means of hydrostatic weighing and are provided at 15 °C, 20 °C, and 25 °C.

SRM	Description	Unit of Issue
211d	Toluene Liquid Density Extended Range	4 x 5 mL
2214	Isooctane Liquid Density	4 x 5 mL

See [Table 208.8](#) on the website for more information.



# Standard Reference Materials for Chemical Composition

## **X-Ray Diffraction**

---


### Diffraction and Scattering

SRMs 656, 676a, 674b, 1878b, and 1879b consist of high phase purity materials for use in the quantitative analysis of samples by the internal standard method. SRM 656 consists of 2 silicon nitride powders, one high in the  $\alpha$  polymorph, the other high in the  $\beta$  polymorph content. SRMs 640f, 660c, 675, and 1976c consist of materials with select crystallographic and microstructure properties used in the evaluation of diffraction equipment for the following variables: 1) d-spacing or line position, 2) line or instrument intensity, and 3) instrumental or sample contributions to the shape of reflection profiles. SRM 1976c, a sintered alumina plate, is also certified with respect to lattice parameters as well as 13 relative intensity values from  $22^\circ$  to  $155^\circ$   $2\theta$  (Cu  $K\alpha$ ). SRM 1990 is certified for lattice parameter.

SRM	Description	Unit of Issue
640f	Line Position and Line Shape Standard for Powder Diffraction (Silicon Powder)	7.5 g
656	Silicon Nitride for Quantitative Analysis by Powder Diffraction	2 x 10 g
660c	Line Position and Line Shape Standard for Powder Diffraction (Lanthanum Hexaboride Powder)	6 g
674b	X-Ray Powder Diffraction Intensity Set (Quantitative Powder Diffraction Standard)	10 g
675	Line Position, Mica (XRD)	7.5 g
676a	Alumina Powder for Quantitative Analysis by X-Ray Diffraction	20 g
1878b	Respirable Alpha Quartz (Quantitative X-Ray Powder Diffraction Standard)	5 g
1879b	Respirable Cristobalite (Quantitative X-Ray Powder Diffraction Standard)	5 g
1976c	Instrument Response Standard for X-Ray Powder Diffraction	disc
1979	Powder Diffraction Line Profile Standard for Crystallite Size Analysis (Nano-Crystalline ZnO Powder)	2 x 3 g
1990	Single Crystal Diffractometer Alignment Standard - Ruby Sphere	3 spheres
2000	Calibration Standard for High-Resolution X-Ray Diffraction	block
3600	Absolute Intensity Calibration Standard for Small-Angle X-Ray Scattering	coupon

See [Table 209.1](#) on the website for more information.



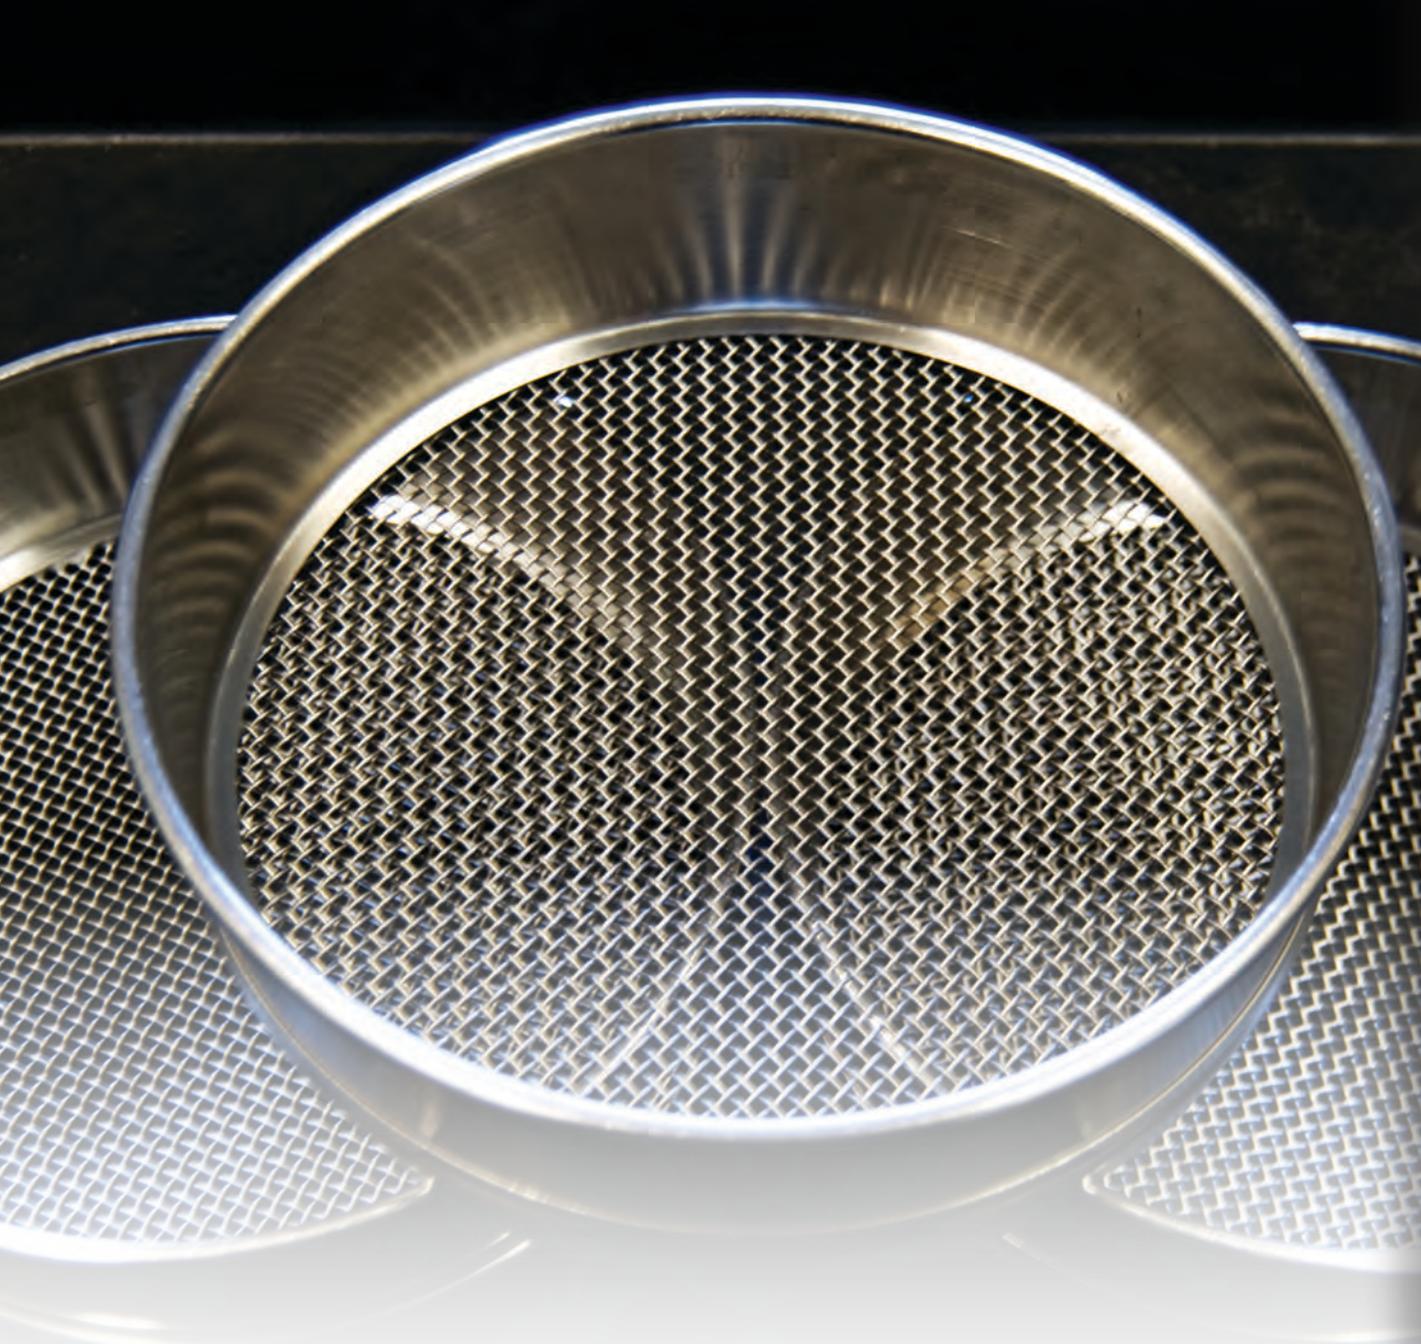

# Standard Reference Materials for Chemical Composition

## Sizing

### Particle Size (powder and solid forms)

These SRMs are intended for evaluating and calibrating specific types of particle size measuring instruments, including light scattering, electrical zone flow-through counters, optical and scanning electron microscopes, sedimentation systems, and wire cloth sieving devices.

SRMs 1003c, 1004b, 1017b, 1018b and 1019b each consist of soda-lime glass beads covering a particular size distribution (PSD) range. RM 8010 is a three bottle set of different sands (A, C and D), intended for use in sieving only, and covers the sieve size range from 30 mesh to 325 mesh.

SRM 1978 consists of granular, irregular shaped zirconium oxide particles measured using sedimentation. SRM 1982 consists of spheroidal particles measured using scanning electron microscopy, laser scattering, and sieving.

SRM 1961 is monodisperse latex particles in a water suspension produced by the National Aeronautics and Space Administration (NASA).

SRMs 8011, 8012 and 8013 are gold nanoparticles in water.

SRM	Description	Unit of Issue
1003c	Glass Beads - Particle Size Distribution (20 µm to 50 µm diameter range)	28 g
1004b	Glass Beads - Particle Size Distribution (40 µm to 150 µm diameter range)	43 g
1017b	Glass Beads - Particle Size Distribution (100 µm to 400 µm diameter range)	70 g
1018b	Glass Beads - Particle Size Distribution (220 µm to 750 µm diameter range)	87 g
1019b	Glass Beads - Particle Size Distribution (750 µm to 2450 µm diameter range)	200 g
1021	Glass Beads - Particle Size Distribution (2 µm to 12 µm diameter range)	4 g
1690	Polystyrene Spheres (1 µm Diameter Particle Size)	5 mL
1691	Polystyrene Spheres (0.3 µm Diameter Particle Size)	5 mL
1961	Polystyrene Spheres (30 µm Diameter Particle Size)	5 mL
1963a	Polystyrene Spheres (100 nm Diameter Particle Size)	5 mL
1964	Polystyrene Spheres (60 nm Diameter Particle Size)	5 mL
1978	Particles Size Distribution Standard for Gravity Sedimentation	5 g

SRM	Description	Unit of Issue
1982	Thermal Spray Powder - Particle Size Distribution Yttria-Stabilized Zirconia (Spheroidal)	10 g
1984	Thermal Spray Powder - Particle Size Distribution Tungsten Carbide/Cobalt (Acicular)	14 g
1985	Thermal Spray Powder - Particle Size Distribution Tungsten Carbide/Cobalt (Spheroidal)	14 g
8010	Sand for Sand Sieve Analysis	3 x 130 g
8011	Gold Nanoparticles, Nominal 10 nm Diameter	2 x 5 mL
8012	Gold Nanoparticles, Nominal 30 nm Diameter	2 x 5 mL
8013	Gold Nanoparticles, Nominal 60 nm Diameter	2 x 5 mL
8634	Ethylene Tetrafluoroethylene for Particle Size Distribution and Morphology	20 mL
8988	Titanium Dioxide Powder - Particle Size Distribution	6 g

See [Table 301.1](#) on the website for more information.





## Cement and Coal Fly Ash Fineness

SRM 46h is for determining sieve residue according to ASTM C430. Each set consists of 10 sealed vials, each containing approximately 5 g of cement.

SRM 114q is for calibrating the Blaine fineness meter according to the latest issue of ASTM C204, to calibrate the Wagner turbidimeter according to ASTM C115, to determine sieve residue according to ASTM C430, and to verify procedure for particle size distribution by a laser diffraction method (no-standard method available). Each set consists of 20 sealed vials, each containing approximately 5 g of cement.

SRM	Description	Unit of Issue
46h	Portland Cement Fineness Standard	10 x 5 g
114q	Portland Cement Fineness Standard	20 x 5 g
2689	Coal Fly Ash	3 x 10 g
2690	Coal Fly Ash	3 x 10 g
2691	Coal Fly Ash	3 x 10 g

See [Table 301.2](#) on the website for more information.

## Electrophoretic Mobility, E (suspension form)

SRM 1980 is intended for use in the calibration and evaluation of equipment used to measure electrophoretic mobility. It consists of a goethite suspension saturated with phosphate in a sodium perchlorate electrolyte solution.

SRM	Description	Unit of Issue
1980	Positive Electrophoretic (+ $\mu_E$ ) Mobility Standard (500 mg/L)	40 mL
1992	Zeta Potential - Colloidal Silica (Nominal Mass Fraction 0.15 %)	4 x 5 mL
1993	Zeta Potential - Colloidal Silica (Nominal Mass Fraction 2.2 %)	2 x 25 mL

See [Table 301.3](#) on the website for more information.



## Surface Area of Powders and Mercury Porosimetry Standards

These SRMs are intended for calibrating and verifying the performance of instruments used to determine the specific surface area of powders by the Brunauer, Emmett, and Teller (BET) method or instruments that use mercury intrusion to measure the pore size and porosity of porous materials. The surface areas of SRMs 1898, 1900, 2206 and 2207 are based on both multi-point and single point analysis of the BET equation.

SRM	Description	Unit of Issue
1898	Titanium Dioxide Nanomaterial	15 g
1900	Specific Surface Area Standard	4 g
1917	Mercury Porosimetry Standard	10 g
2206	Controlled Pore Glass - BET Specific Surface Area (Nominal Pore Diameter 300 nm)	5 g
2207	Controlled Pore Glass - BET Specific Surface Area (Nominal Pore Diameter 18 nm)	5 g
2696	Silica Fume (powder form)	70 g

See [Table 301.4](#) on the website for more information.

## Particle Count Materials (powder and suspension forms)

These SRM and RM materials are intended for use in calibrating the response of particle sizing instrumentation, including optical counters, in accordance with National Fluid Power Association (NFPA) and ISO standard methods (NFPA/T2.9.6 R2-1998, ISO/FDIS 11171, ISO/FDIS 12103) for determining particle contamination in oils. SRM 2806b is certified for particle concentration and projected area diameter. It consists of a polydisperse, irregularly-shaped mineral dust suspended in 5606 hydraulic fluid. RMs 8631b and 8632 are mineral test dusts of medium and ultrafine particle size and can be used to prepare suspensions in other types of oils. **NOTE:** The same lot of medium test dust was used to produce SRM 2806b and RM 8631b, and is a derivative of Arizona Road Dust.


SRM	Description	Unit of Issue
2806b	Medium Test Dust (MTD) in Hydraulic Fluid	2 x 400 mL
8631b	Medium Test Dust (MTD)	20 g
8632	Ultra Fine Test Dust (UFTD)	20 g


See [Table 301.5](#) on the website for more information.

# Please Register Your SRM Online!

Registering will ensure that you will be notified of any technical updates or developments.

[https://www.nist.gov/srm\\_reg](https://www.nist.gov/srm_reg)

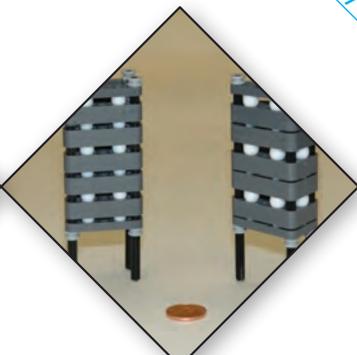

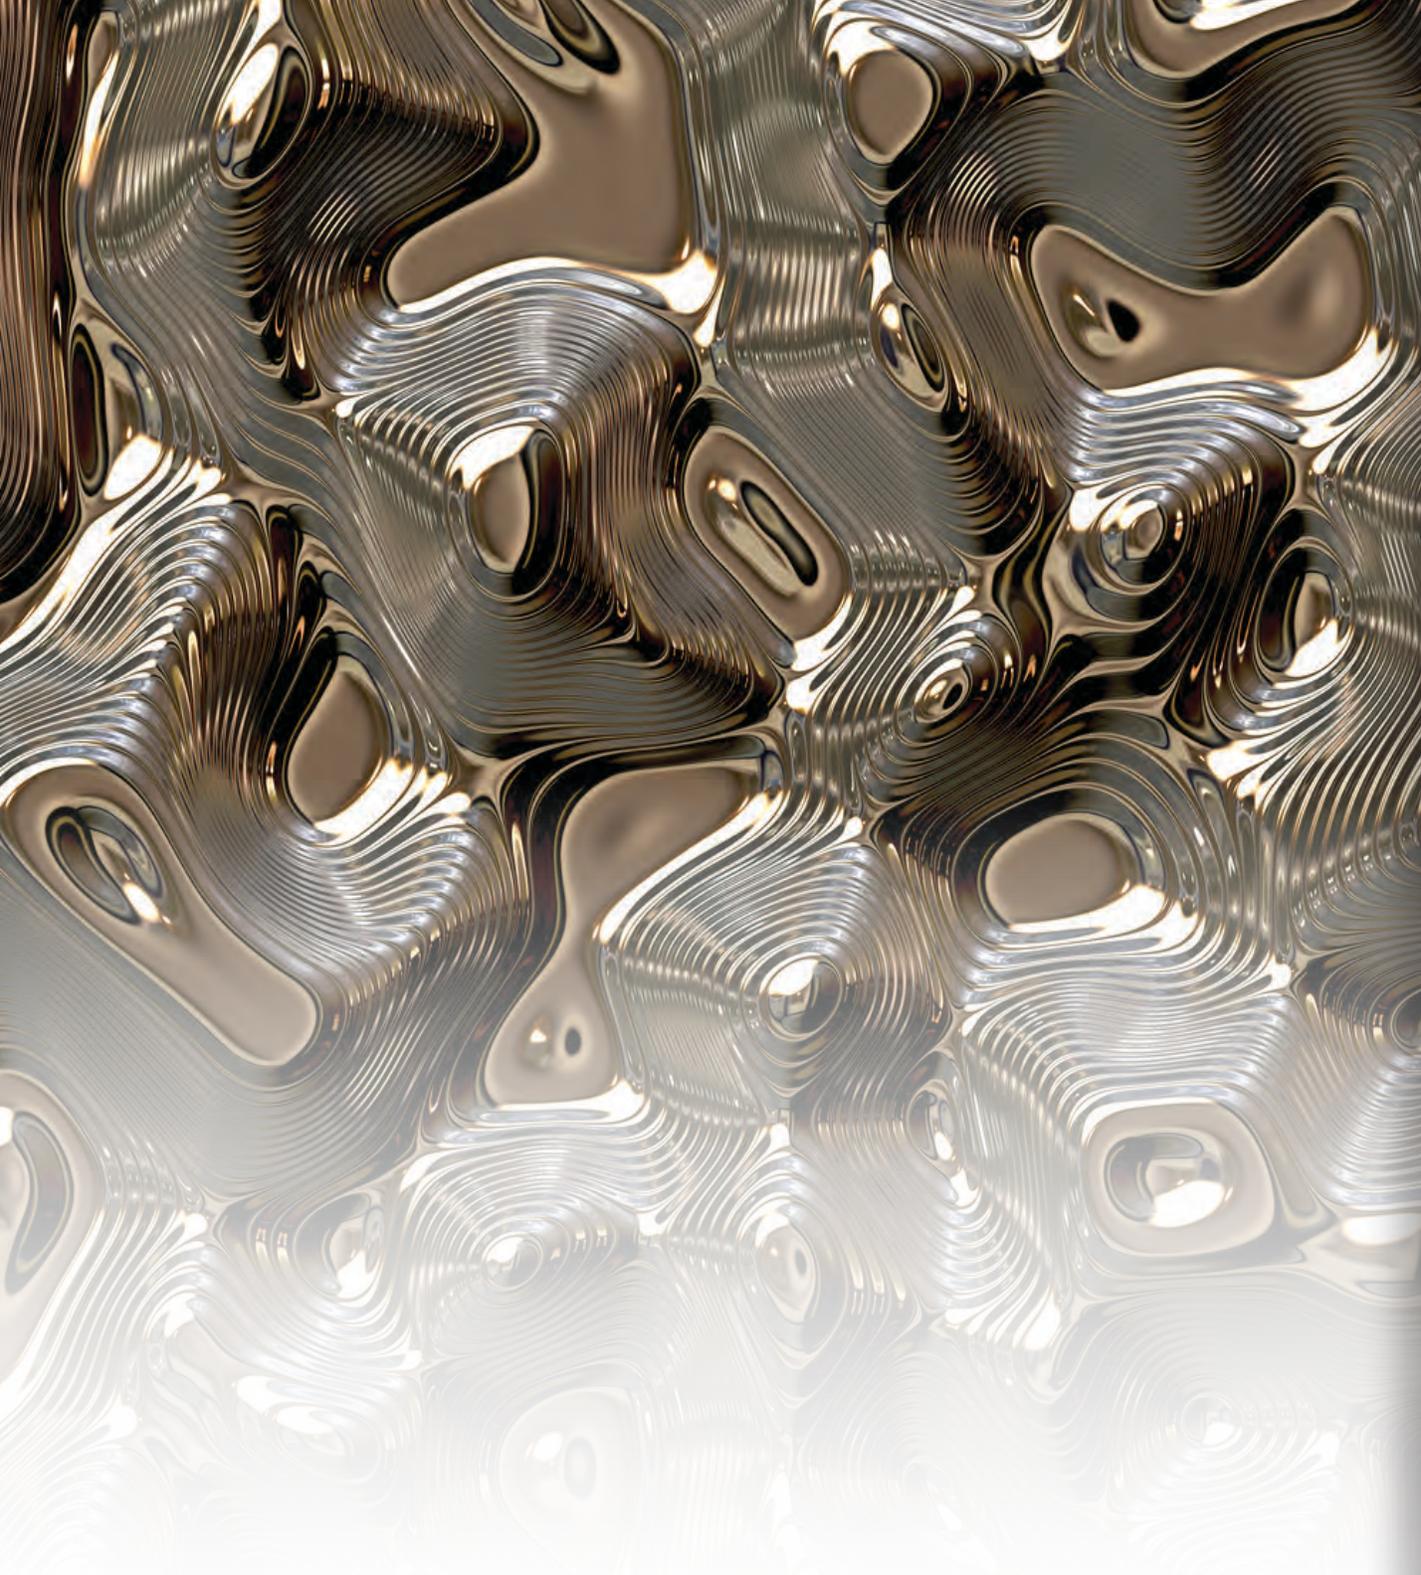

# Standard Reference Materials for Chemical Composition

## **Surface Finish**

---



### Microindentation Hardness (block form)

These SRMs are for use in calibrating and checking the performance of microhardness testers and may be used in conjunction with ASTM E 384. SRMs 1893 through 1907 are 1.25 cm x 1.25 cm (SRM 2798 is 1.35 cm x 1.35 cm) and were made by electroforming the test metal on AISI 1010 steel substrate. SRMs 2830 and 2831 are intended to meet the needs of the structural, electronic, and biomedical ceramics communities.

SRM	Description	Unit of Issue
1893	Copper Microhardness Test Block (Knoop)	each
1894a	Vickers Microhardness of Copper	each
1895	Nickel Microhardness Test Block (Knoop)	each
1896b	Vickers Microhardness of Nickel	each
1905	Nickel Microhardness Test Block (Knoop)	each
1906	Nickel Microhardness Test Block (Knoop)	each
1907	Nickel Microhardness Test Block (Knoop)	each
1908	Vickers Microhardness of Nickel	each
1909	Vickers Microhardness of Nickel	each
2798a	Vickers Microhardness of Nickel	each
2828	Knoop Microhardness of Steel	each
2829	Vickers Microhardness of Steel	each
2830	Knoop Hardness of Ceramics	each
2831	Vickers Hardness of Ceramics and Hardmetals	each

See [Table 302.1](#) on the website for more information.

### Abrasive Wear (block form)

This SRM is for use in the dry sand/rubber wheel abrasion test per ASTM G 65, Procedure A.

SRM	Description	Unit of Issue
1857	Tool Steel for Abrasive Wear Standard	2 blocks

See [Table 302.2](#) on the website for more information.

### Surface Roughness (block form)

These SRMs are for calibrating stylus instruments that measure surface roughness. These electroless-nickel coated steel blocks have a sinusoidal roughness profile machined on the top surface.

SRM	Description	Unit of Issue
2073a	Sinusoidal Roughness Specimen	each
2074	Sinusoidal Roughness Specimen	each

See [Table 302.4](#) on the website for more information.

### Rockwell Hardness (block form)

These Standard Reference Materials (SRMs) are transfer standards intended primarily for use in the calibration and verification of the performance of Rockwell hardness equipment using the applicable Rockwell hardness C scale (HRC), Rockwell hardness 15N scale (HR15N), or Rockwell hardness 30N scale (HR30N). Each SRM unit is a steel test block, nominally 64 mm in diameter and 15 mm thick, having a polished test surface described by a micro-engraved circle 52 mm in diameter. Each SRM unit is individually certified and bears a unique serial number on the edge of the block.

SRM	Description	Unit of Issue
2810	Rockwell C Hardness - Low Range	1 block
2811	Rockwell C Hardness - Mid Range	1 block
2812	Rockwell C Scale Hardness - High Range	1 block
2816	Rockwell Hardness 15N Scale - Low Range (Nominal 72 HR15N)	1 block
2817	Rockwell Hardness 15N Scale - Mid Range (Nominal 83 HR15N)	1 block
2818	Rockwell Hardness 15N Scale - High Range (Nominal 91 HR15N)	1 block
2819	Rockwell Hardness 30N Scale - Low Range (Nominal 45 HR30N)	1 block
2820	Rockwell Hardness 30N Scale - Mid Range (Nominal 64 HR30N)	1 block
2821	Rockwell Hardness 30N Scale - High Range (Nominal 79 HR30N)	1 block

See [Table 302.5](#) on the website for more information.



# Standard Reference Materials for Chemical Composition

## **Fire Research**

---

### Flooring Radiant Panel (sheet form)

This SRM consists of three sheets of kraft paperboard. It is for checking the operation of flooring radiant panel test apparatus used to measure critical radiant flux as per ASTM E 648.

SRM	Description	Unit of Issue
1012	Flooring Radiant Panel	3


See [Table 305.4](#) on the website for more information.


### Standard Cigarettes for Ignition Strength and Ignition Resistance Testing

SRM 1082 is intended for use by test laboratories to assess and control their testing of cigarette ignition in accordance with ASTM Standard Methods E 2187-16. SRM 1196a is intended for use by test laboratories to test mattresses, upholstered furniture and its components, and thermal insulation for resistance to cigarette ignition in accordance with 16 CFR 1632, 16 CFR 1634 (proposed) and 16 CFR 1209.

SRM	Description	Unit of Issue
1082	Cigarette Ignition Strength Standard (200 cigarettes)	1 carton
1196a	Standard Cigarette for Ignition Resistance Testing (400 cigarettes)	2 cartons

See [Table 305.5](#) on the website for more information.

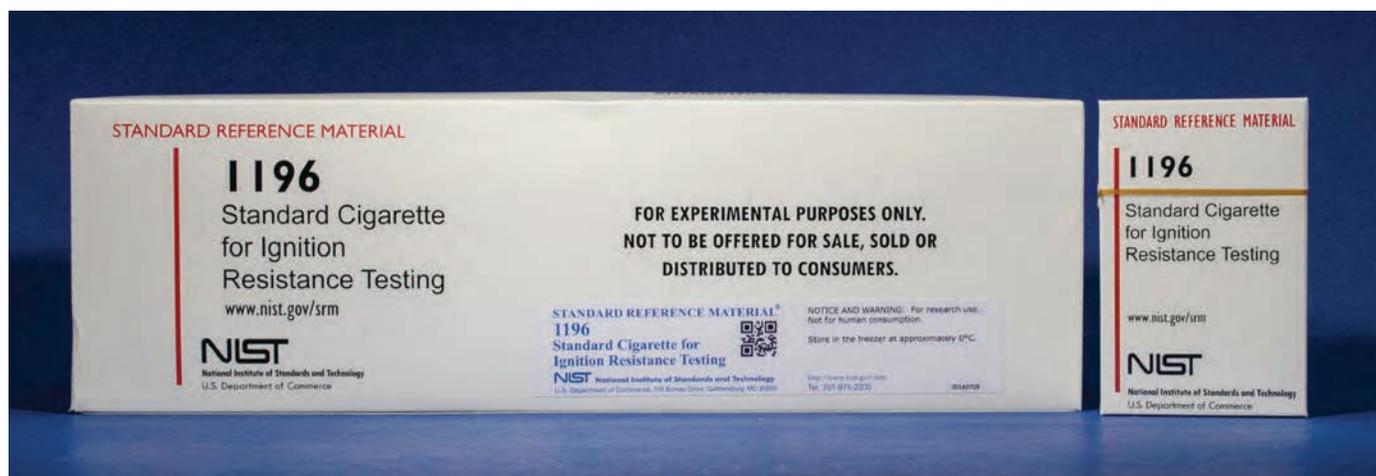

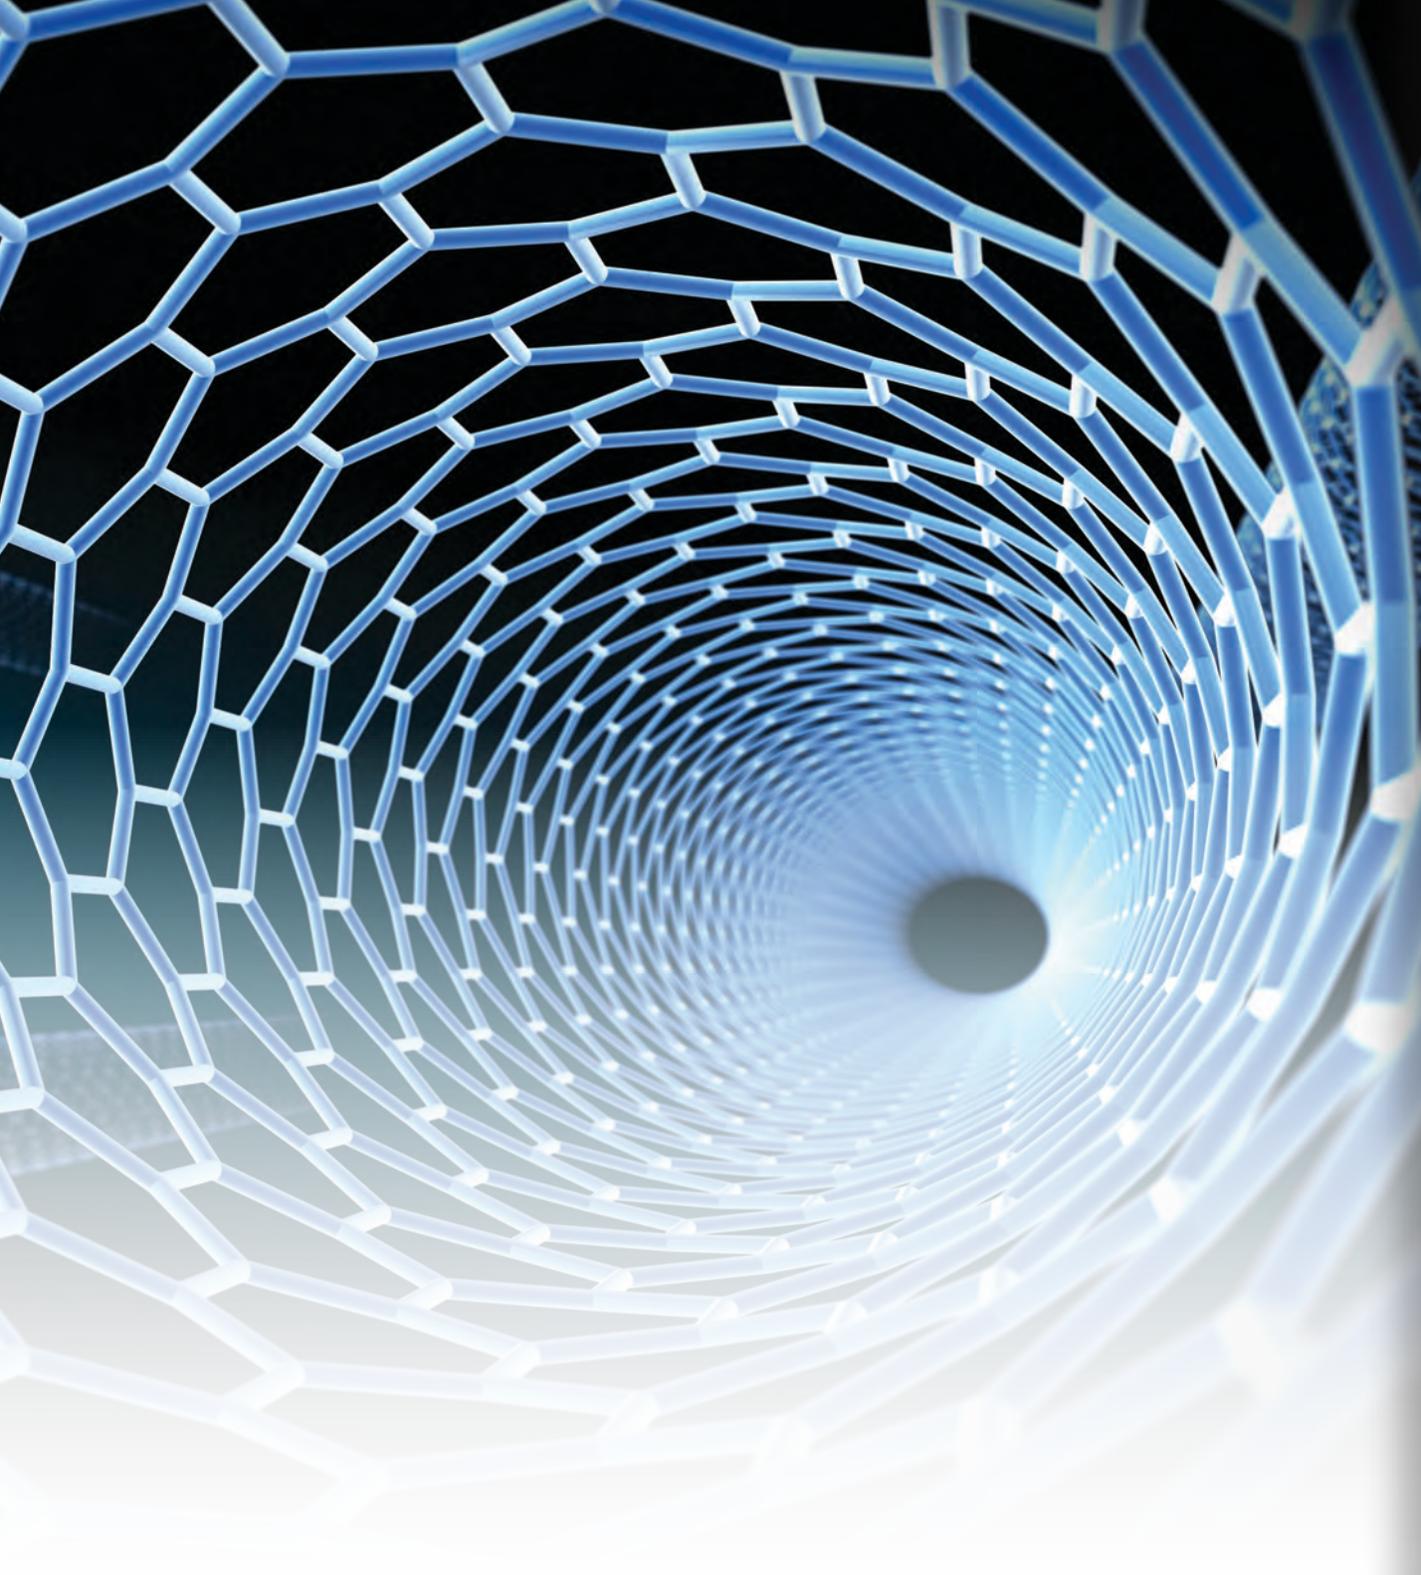

# Standard Reference Materials for Chemical Composition

## **Nanomaterials**

---



### Nanomaterials (less than or equal to 100 nm)

SRM	Description	Unit of Issue
1898	Titanium Dioxide Nanomaterial	15 g
1963a	Polystyrene Spheres (Nominal 100 nm Diameter)	5 mL
1964	Polystyrene Spheres (Nominal 60 nm Diameter)	5 mL
2483	Single-Wall Carbon Nanotubes (Raw Soot)	250 mg
2484	Multiwall Carbon Nanotubes (Raw Soot)	6 g
8011	Gold Nanoparticles (Nominal 10 nm Diameter)	2 x 5 mL
8012	Gold Nanoparticles (Nominal 30 nm Diameter)	2 x 5 mL
8013	Gold Nanoparticles (Nominal 60 nm Diameter)	2 x 5 mL
8017	Polyvinylpyrrolidone Coated Silver Nanoparticles (Nominal Diameter 75 nm)	5
8027	Silicon Nanoparticles (Nominal Diameter 2 nm)	5 x 1 mL
8281	Single-Wall Carbon Nanotubes (Dispersed, Three Length-Resolved Populations)	set (4)

See [Table 308.1](#) on the website for more information.





# Standard Reference Materials for Chemical Composition

## **Miscellaneous Performance**

## Impact Standards: Charpy V-Notch Specimens

These SRMs are test specimens intended primarily for the verification of Charpy testing machines. The dimensions of these SRMs comply with the current ASTM Standard E23 and the current ISO 148-1 Standard.

SRMs 2092, 2096, and 2098 are NIST-Verification Charpy V-notch specimens that have a post-test evaluation service and proficiency test data available with them. SRMs 2092 and 2096 are to be tested at  $-40\text{ }^{\circ}\text{C}$ ; SRM 2098 is to be tested at room temperature ( $21\text{ }^{\circ}\text{C}$ ). These SRMs should be tested (broken) at the same time, then returned to NIST Boulder for evaluation. An acceptable machine will produce an average value within 1.4 J or 5 % of the certified energy value, whichever is greater.


SRMs 2093 and 2097 are Self-Verification Charpy V-notch specimens that do not have any post-test services available with them. These SRMs provide a lower cost option for the Self-Service user. SRMs 2093 and 2097 are to be tested at  $-40\text{ }^{\circ}\text{C}$ . These SRMs are not returned to NIST Boulder for evaluation.

SRMs 2112 and 2113 are NIST-Verification Charpy V-notch specimens that are certified for absorbed energy at  $-40\text{ }^{\circ}\text{C}$  and room temperature and for maximum force at room temperature. These SRMs provide a means to verify the performance of both the energy and force scales of an instrumented Charpy impact machine at room temperature ( $21\text{ }^{\circ}\text{C}$ ). They can also be used to verify just the energy scale of a machine at  $-40\text{ }^{\circ}\text{C}$ , interchangeably with SRMs 2092 and 2096. An acceptable machine will produce an average value within 1.4 J or 5 % of the certified energy value, whichever is greater. Currently, specific requirements are not available to verify the performance of the force scale for a Charpy test machine.

SRMs 2216, 2218, and 2219 are intended for the verification of maximum force and absorbed energy values measured at room temperature using a small-scale Charpy impact machine, in accordance with the current standards ASTM E2248 or ISO 14556. Each SRM unit consists of a set of three KLST-type specimens needed to perform a single verification.

SRM	Description	Unit of Issue
2092	Low-Energy Charpy V-Notch Specimens (NIST-Verification, 8-mm Striker)	set
2093	Low-Energy Charpy V-Notch Specimens (Self-Verification, 8-mm Striker)	set
2096	High-Energy Charpy V-Notch Specimens (NIST-Verification, 8-mm Striker)	set
2097	High-Energy Charpy V-Notch Specimens (Self-Verification, 8-mm Striker)	set
2098	Super-High-Energy Charpy V-Notch Specimens (NIST-Verification, 8-mm Striker)	set
2112	Dynamic Impact Force Verification Specimens (Self-Verification, 8-mm Striker, 24 kN nominal)	set
2113	Dynamic Impact Force Verification Specimens (Self-Verification, 8-mm Striker, 33 kN nominal)	set
2197	Low-Energy Charpy V-Notch Specimens (Self-Verification, 2-mm Striker)	set
2198	High-Energy Charpy V-Notch Specimens (Self-Verification, 2-mm Striker)	set
2216	Miniaturized Low-Energy Charpy V-Notch KLST Specimens (Self-Verification)	set
2218	Miniaturized High-Energy Charpy V-Notch KLST Specimens (Self-Verification)	set
2219	Miniaturized Super-High-Energy Charpy V-Notch KLST Specimens (Self-Verification)	set

See [Table 309.1](#) on the website for more information.

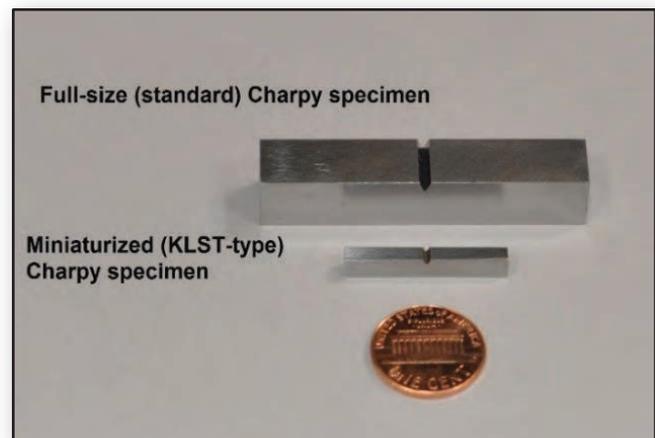



**Tape Adhesion Testing (sheet form)**

This SRM is intended as a uniform source of linerboard for use with ASTM Standards D 2860 Standard Test Method for Adhesion of Pressure-Sensitive Tape to Fiberboard at 90° Angle and Constant Stress, D 3654 Standard Test Method for Holding Power of Pressure-Sensitive Tapes, and D 3889 Standard Method for Adherence to Linerboard of Pressure-Sensitive Tapes at Low Temperature.

SRM	Description	Unit of Issue
1810a	Linerboard	50 each

See [Table 309.4](#) on the website for more information.

**Bleached Kraft Pulp (sheet form)**

RM 8495 Northern Softwood Bleached Kraft Pulp and RM 8496 Eucalyptus Hardwood Bleached Kraft Pulp are intended primarily for use in fundamental studies on the physical properties of fibers and paper sheets. The materials selected for these two RMs are bleached dried lap pulp, each from a single lot of a standard commercial production run. The materials were selected because of their differing fiber size, differing papermaking properties, and similarity to commercially available materials.

RMs 8495 and 8496 were developed and prepared with input and support from the Pulp Material Research Committee (PMRC), a subcommittee of the Fundamental Research Committee. These materials were donated by industry and are being distributed by the SRM Program. At this time, no extensive property measurements have been made on these materials beyond ensuring they were within the control limits of the normal production run. A measurement error study is in progress with participation by international paper technical laboratories. As results become available, they will be published and added to the Report of Investigation that accompanies each of these materials.

SRM	Description	Unit of Issue
8495	Northern Softwood	10 sheets
8496	Eucalyptus Hardwood	10 sheets

See [Table 309.5](#) on the website for more information.

**Secondary Ferrite Standards**

Reference Materials RM 8480 and RM 8481, Secondary Ferrite Standards, are intended for the calibration of instruments used to measure weld metal ferrite content in accordance with American National Standards Institute / American Welding Society (ANSI/AWS) Standard A4.2 and International Organization of Standardization (ISO) Standard 8249. RM 8480 consists of a low range (8 specimens distributed in the range of 0 FN to 30 FN) and RM 8481 is the corresponding high range (8 specimens distributed in the range of 30 FN to 120 FN).

Previously issued SRMs 485 to 488 are a suite of SRMs for Austenite in Ferrite, which were produced a little over 20 years ago. They are now considered technically obsolete and are not longer suitable for their intended purpose. NIST has more recently developed other reference mixtures of austenite and ferrite, RM 8480 Secondary Ferrite Number Standard-Low Range and RM 8481 Secondary Ferrite Number Standard-High Range, which are listed below. These are in units of FN, as they were designed for magnetic response measurements of ferrite in an austenitic matrix.

SRM	Description	Unit of Issue
8480	Secondary Ferrite Number Standard - Low Range	set (8)
8481	Secondary Ferrite Number Standard - High Range	set (8)

See [Table 309.6](#) on the website for more information.

## Fracture Toughness of Ceramics

SRMs 2100a and 2100b Fracture Toughness of Ceramic are intended for verification of fracture toughness testing procedures and may be used in conjunction with ASTM Standard Test Method ASTM C1421-99 "Standard Test Methods for Fracture Toughness of Advanced Ceramics."

A unit of SRMs 2100a or 2100b consists of five hot-pressed silicon nitride flexure specimens. Each specimen is 3 mm x 4 mm x (45 to 47) mm. The SRM may be used with any fracture toughness test method, but is optimized for beam bending test configurations.

SRM	Description	Unit of Issue
2100a	Fracture Toughness of Ceramic	5 bars
2100b	Fracture Toughness of Ceramic	5 bars

See [Table 309.7](#) on the website for more information.

## Magnetic Moment

These Standard Reference Materials are intended for use in the calibration of magnetometers (such as vibrating sample magnetometers) that are used in the measurement of magnetic properties of materials.

SRM	Description	Unit of Issue
762	Magnetic Moment Standard - Nickel Disk	6 mm D
764a	Magnetic Susceptibility Standard - Platinum Cylinder	3 mm D x 3.42 mm L
772a	Magnetic Moment Standard - Nickel Sphere	each
2853	Magnetic Moment Standard - Yttrium Iron Garnet Sphere	each

See [Table 309.8](#) on the website for more information.

## Standard Bullet Replica and Cartridge Case

SRM	Description	Unit of Issue
2460a	Standard Bullet Replica	each
2461	Standard Cartridge Case	each

See [Table 309.11](#) on the website for more information.

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>	<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>1d</b>	Limestone, Argillaceous	48	<b>134a</b>	Molybdenum-Tungsten-Chromium-Vanadium Steel	4
<b>4l</b>	Cast Iron	5	<b>136f</b>	Potassium Dichromate, (Oxidimetric Standard)	14
<b>5m</b>	Cast Iron	5	<b>139b</b>	Chromium-Nickel-Molybdenum Steel	2
<b>6g</b>	Cast Iron	5	<b>141e</b>	Acetanilide	14
<b>8k</b>	Bessemer Steel (Simulated), 0.1 % Carbon	2	<b>143d</b>	Cystine (L-Cystine)	14
<b>12h</b>	Basic Open-Hearth Steel, 0.4 % Carbon	2	<b>152a</b>	Basic Open-Hearth Steel, 0.5 % Carbon (Tin Bearing)	2
<b>13g</b>	0.6 % Carbon Steel	2	<b>155</b>	Chromium-Tungsten Steel	2
<b>14g</b>	Carbon Steel (AISI 1078)	2	<b>158a</b>	Silicon Bronze	8
<b>16f</b>	Basic Open-Hearth Steel, 1 % Carbon	2	<b>160b</b>	Stainless Steel, Cr 18-Ni 12-Mo 2 (AISI 316)	4
<b>17f</b>	Sucrose Optical Rotation	14, 68	<b>163</b>	Chromium Steel	2
<b>19h</b>	Basic Electric Steel, 0.2 % Carbon	2	<b>165a</b>	Glass Sand	48, 52
<b>20g</b>	AISI 1045 Steel	2	<b>166c</b>	Stainless Steel, Low-Carbon (AISI 316L)	4
<b>25d</b>	Manganese Ore	48	<b>173c</b>	Titanium Alloy UNS R56400 (chip form)	10
<b>30f</b>	Cr-V Steel (SAE 6150)	2	<b>178</b>	0.4C Basic Oxygen Furnace Steel	2
<b>32e</b>	Carbon Low Alloy Steel (SAE 3140)	2	<b>179</b>	LA Steel, High Silicon	2
<b>33e</b>	Nickel Steel	2	<b>180</b>	Fluorspar, High Grade	48
<b>39j</b>	Benzoic Acid (Calorimetric Standard)	64	<b>182</b>	Lithium Ore (Petalite)	48
<b>45d</b>	Copper Secondary Freezing Point Standard	65	<b>183</b>	Lithium Ore (Lepidolite)	48
<b>46h</b>	Portland Cement Fineness Standard	85	<b>185i</b>	Potassium Hydrogen Phthalate	60
<b>49e</b>	Lead Secondary Freezing Point Standard	65	<b>186g</b>	Potassium Dihydrogen Phosphate (186-I-g) Disodium Hydrogen Phosphate (186-II-g)	60
<b>50c</b>	Tungsten-Chromium-Vanadium Steel	4	<b>187f</b>	Sodium Tetraborate Decahydrate (Borax)	60
<b>53e</b>	Lead-Base Bearing Metal (84Pb-10Sb-6Sn)	9	<b>188</b>	Potassium Hydrogen Tartrate	60
<b>54d</b>	Bearing Metal (Tin Base) (powder)	10	<b>189c</b>	Potassium Tetroxalate Dihydrate	60
<b>57b</b>	Silicon Metal	4	<b>191d</b>	Sodium Bicarbonate (191d-I) Sodium Carbonate (191d-II)	60
<b>58a</b>	Ferrosilicon (73 % Si Regular Grade)	4	<b>193</b>	Potassium Nitrate	45
<b>59a</b>	Ferrosilicon	4	<b>194a</b>	Ammonium Dihydrogen Phosphate	45
<b>64c</b>	Ferrochromium High Carbon	4	<b>195</b>	Ferrosilicon (75 % Si-High Purity Grade)	4
<b>68c</b>	High-Carbon Ferromanganese	4	<b>196</b>	Ferrochromium, (Low-Carbon)	4
<b>69b</b>	Bauxite (Arkansas)	48	<b>198</b>	Silica Brick	48
<b>70b</b>	Potassium Feldspar	48	<b>199</b>	Silica Brick	48
<b>72g</b>	Low Alloy Steel (AISI 4130)	2	<b>200b</b>	Potassium Dihydrogen Phosphate, (Fertilizer Standard)	45
<b>76a</b>	Burnt Refractory (Al <sub>2</sub> O <sub>3</sub> -40%)	48	<b>211d</b>	Toluene Liquid Density Extended Range	80
<b>77a</b>	Burnt Refractory (Al <sub>2</sub> O <sub>3</sub> -60%)	48	<b>277</b>	Tungsten Concentrate	48
<b>78a</b>	Burnt Refractory (Al <sub>2</sub> O <sub>3</sub> -70%)	48	<b>278</b>	Obsidian Rock	48
<b>79a</b>	Fluorspar	48	<b>291</b>	Cr-Mo Steel (ASTM A-213)	2
<b>80a</b>	Soda-Lime Glass	52	<b>293</b>	Cr-Ni-Mo Steel (AISI 8620)	2
<b>81a</b>	Glass Sand	48, 52	<b>330a</b>	Copper Ore Mill Heads	48
<b>84i</b>	Potassium Hydrogen Phthalate	14	<b>331a</b>	Copper Ore Mill Tails	48
<b>87a</b>	Silicon-Aluminum Alloy (chip form)	8	<b>334</b>	Gray Cast Iron	5
<b>88b</b>	Dolomitic Limestone	48	<b>339</b>	17 Chromium-9 Nickel-0.2 Selenium Steel	4
<b>89</b>	Glass, Lead Barium	52	<b>341</b>	Ductile Cast Iron	5
<b>90</b>	Ferrophosphorus	4	<b>342a</b>	Nodular Cast Iron	5
<b>92</b>	Soda-Lime Glass, Low Boron (Powder)	52	<b>344</b>	15 Chromium-7 Nickel Steel (Mo Precipitation Hardening)	3
<b>93a</b>	Borosilicate Glass	52	<b>345b</b>	Fe-Cr-Ni Alloy UNS J92180	3
<b>97b</b>	Flint Clay	48	<b>346a</b>	Valve Steel	3
<b>98b</b>	Plastic Clay	48	<b>349a</b>	Waspaloy (chip form)	9
<b>99b</b>	Soda Feldspar	48	<b>350c</b>	Benzoic Acid Acidimetric Standard	14
<b>100b</b>	Manganese Steel	2	<b>351a</b>	Sodium Carbonate	14
<b>101g</b>	18 Cr-10 Ni Steel (AISI 304L) (powder form)	4	<b>360b</b>	Zirconium (Sn-Fe-Cr) Alloy	10
<b>107c</b>	Cast Iron (Ni-Cr-Mo)	5	<b>361</b>	AISI 4340 Steel (chip form)	2
<b>114q</b>	Portland Cement Fineness Standard	85	<b>363</b>	Chromium-Vanadium Steel (Modified)	2
<b>115a</b>	Copper-Nickel-Chromium Cast Iron	5	<b>368</b>	Carbon Steel (AISI 1211)	2
<b>120c</b>	Phosphate Rock (Florida)	45, 48	<b>399</b>	Unalloyed Copper - Cu VI (chip form)	8
<b>122i</b>	Cast Iron	5	<b>423</b>	Molybdenum Oxide Concentrate	48
<b>123c</b>	Stainless Steel, Cr-Ni-Nb (AISI 348)	4	<b>454</b>	Unalloyed Copper XI (chip form)	8
<b>125b</b>	LA Steel, High Silicon	2	<b>457</b>	Unalloyed Copper IV (solid)	8
<b>126c</b>	High-Nickel Steel (Nominal Mass Fraction 36 % Ni)	3	<b>458</b>	Beryllium-Copper (17510) (chip form)	8
<b>127b</b>	Solder (40Sn-60Pb)	9	<b>459</b>	Beryllium-Copper (17200) (chip form)	8
<b>129c</b>	LA Steel, High Sulfur (SAE 112)	2	<b>460</b>	Beryllium-Copper Alloy (chip form)	8
<b>131h</b>	Refined Cast Iron	2			
<b>132b</b>	Tool Steel (AISI M2)	4			
<b>133b</b>	Chromium-Molybdenum Steel	4			

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>480</b>	Tungsten 20 % - Molybdenum Alloy Electron Microprobe Standard	12
<b>481</b>	Gold-Silver Wires for Microprobe Analysis	12
<b>482</b>	Gold-Copper Wires for Microprobe Analysis	12
<b>494</b>	Unalloyed Copper I (solid)	8
<b>495</b>	Unalloyed Copper II (solid)	8
<b>498</b>	Unalloyed Copper V (solid)	8
<b>500</b>	Unalloyed Copper - Cu VII	8
<b>600</b>	Bauxite, Australian-Darling Range	48
<b>606</b>	Trace Elements in Basalt Glass	52
<b>607</b>	Potassium Feldspar	48
<b>610</b>	Trace Elements in Glass	52
<b>611</b>	Trace Elements in Glass	52
<b>612</b>	Trace Elements in Glass	52
<b>613</b>	Trace Elements in Glass	52
<b>614</b>	Trace Elements in Glass	52
<b>616</b>	Trace Elements in Glass	52
<b>617</b>	Trace Elements in Glass	52
<b>620</b>	Soda Lime, Flat	52
<b>622</b>	Soda-Lime-Silica Glass	80
<b>624</b>	Lead-Silica Glass for dc Volume Resistivity	80
<b>625</b>	Spectrographic Zinc-Base Die-Casting Alloy A	10
<b>626</b>	Spectrographic Zinc-Base Die-Casting Alloy B	10
<b>627</b>	Spectrographic Zinc-Base Die-Casting Alloy C	10
<b>628</b>	Spectrographic Zinc-Base Die-Casting Alloy D	10
<b>629</b>	Spectrographic Zinc-Base Die-Casting Alloy E	10
<b>630</b>	Spectrographic Zinc-Base Die-Casting Alloy F	10
<b>631</b>	Spectrographic Zinc Spelter (Modified)	10
<b>633a</b>	Portland Cement	54
<b>634a</b>	Portland Cement	54
<b>635a</b>	Portland Cement (Blended with Slag)	54
<b>640f</b>	Line Position and Line Shape Standard for Powder Diffraction (Silicon Powder)	82
<b>641</b>	Spectroscopic Titanium-Base Standards Titanium Alloy, 8 Mn (A)	10
<b>643</b>	Spectroscopic Titanium-Base Standards Titanium Alloy, 8 Mn (C)	10
<b>647</b>	Titanium Alloy, Al-Mo-Sn-Zr	10
<b>648</b>	Titanium-Base Alloy 5Al-2Sn-2Zr-4Cr-4Mo	10
<b>649</b>	Titanium-Base Alloy (15V-3Al-3Cr-3Sn) (chip form)	10
<b>654b</b>	Titanium Alloy, Al-V	10
<b>656</b>	Silicon Nitride for Quantitative Analysis by Powder Diffraction	82
<b>660c</b>	Standard for Powder Diffraction (Lanthanum Hexaboride Powder)	82
<b>663</b>	Chromium-Vanadium Steel (Modified)	3
<b>670</b>	Rutile Ore	48
<b>674b</b>	X-Ray Powder Diffraction Intensity Set (Quantitative Powder Diffraction Standard)	82
<b>675</b>	Line Position, Mica (XRD)	82
<b>676a</b>	Alumina Powder for Quantitative Analysis by X-Ray Diffraction	82
<b>679</b>	Brick Clay	48
<b>682</b>	High-Purity Zinc	14
<b>683</b>	Zinc Metal	14
<b>688</b>	Basalt Rock	48
<b>689</b>	Ferrochromium Silicon	4
<b>690</b>	Iron Ore Canada	48
<b>691</b>	Iron Oxide, Reduced	48
<b>692</b>	Iron Ore, Labrador	48
<b>693</b>	Iron Ore (Nimba)	48
<b>694</b>	Phosphate Rock, Western	45, 48

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>695</b>	Trace Elements in Multi-Nutrient Fertilizer	45
<b>696</b>	Bauxite, Surinam	48
<b>697</b>	Bauxite, Dominican	48
<b>698</b>	Bauxite, Jamaican	48
<b>705a</b>	Polystyrene (Narrow Molecular Weight Distribution)	62, 64
<b>706a</b>	Polystyrene (Broad Molecular Mass Distribution)	62
<b>709</b>	Extra Dense Lead Glass	80
<b>717a</b>	Hi Boron Glass Viscosity	80
<b>720</b>	Sapphire Heat Capacity	64
<b>723e</b>	Tris Acidimetric	14
<b>728</b>	Intermediate-Purity Zinc (pellet form)	14
<b>731L1</b>	Borosilicate Glass - Thermal Expansion	65
<b>731L2</b>	Borosilicate Glass - Thermal Expansion	65
<b>731L3</b>	Borosilicate Glass - Thermal Expansion	65
<b>740a</b>	Zinc Freezing-Point Standard 419.527 °C	64
<b>741a</b>	Tin Freezing-Point Standard	64
<b>742</b>	Aluminum Oxide Pyrometric Standard	65
<b>762</b>	Magnetic Moment Standard - Nickel Disk	96
<b>764a</b>	Magnetic Susceptibility Standard Platinum Cylinder	96
<b>772a</b>	Magnetic Moment Standard - Nickel Sphere	96
<b>781D2</b>	Molybdenum - Heat Capacity (rod form)	64
<b>853a</b>	Aluminum Alloy 3004 (chip form)	8
<b>854a</b>	Aluminum Alloy 5182 (chip form)	8
<b>855a</b>	Aluminum Casting Alloy 356 (chip form)	8
<b>856a</b>	Aluminum Casting Alloy 380 (chip form)	8
<b>858</b>	Aluminum Alloy 6011 (chip form)	8
<b>861</b>	Nickel-based Superalloy PWA 1484 (chip form)	9
<b>862</b>	High-Temperature Alloy L 605 (chip form)	8
<b>862</b>	High-Temperature Alloy L 605	3
<b>864</b>	Nickel Alloy UNS N06600 (chip form)	9
<b>865</b>	Inconel 625 (chip form)	9
<b>866</b>	Incoloy 800 (chip form)	3
<b>867</b>	Ni-Fe-Cr Alloy UNS N08825 (chip form)	3
<b>868</b>	High-Temperature Alloy (Fe-Ni-Co)	3
<b>869b</b>	Column Selectivity Test Mixture for Liquid Chromatography	40
<b>870</b>	Column Performance Test Mixture for Liquid Chromatography	40
<b>871</b>	Phosphor Bronze (CDA 521) (chip form)	8
<b>872</b>	Phosphor Bronze (CDA 544) (chip form)	8
<b>874</b>	Cupro-Nickel, 10 % (CDA 706) "HIGH-PURITY" (chip form)	8
<b>875</b>	Cupro-Nickel, 10 % (CDA 706) "DOPED" (chip form)	8
<b>880</b>	Nickel Silver (CDA 770) (granular form)	8
<b>882</b>	Nickel-Copper Alloy (65Ni-31Cu-3Al)	9
<b>885</b>	Refined Copper (pin form)	14
<b>886</b>	Refractory Gold Ore	48
<b>887</b>	Cemented Carbide (W-83,Co-10)	52
<b>888</b>	Cemented Carbide (W-64,Co-25,Ta-5)	52
<b>889</b>	Cemented Carbide (W-75,Co-9,Ta-5,Ti-4)	52
<b>892</b>	High-Alloy White Cast Iron (Ni-Hard, Type IV)	5
<b>893</b>	Stainless Steel (SAE 405) (chip form)	4
<b>895</b>	Stainless Steel (SAE 201) (chip form)	4
<b>897</b>	Tracealloy A (chip form)	9
<b>899</b>	Tracealloy C (chip form)	9
<b>909c</b>	Frozen Human Serum	20, 21
<b>911c</b>	Cholesterol	20
<b>912b</b>	Urea-Clinical	20
<b>913b</b>	Uric Acid	20
<b>914b</b>	Creatinine	20
<b>915b</b>	Calcium Carbonate (Clinical Standard)	20
<b>916a</b>	Bilirubin	20
<b>917c</b>	D-Glucose (Dextrose)	14, 20

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>	<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>918c</b>	Potassium Chloride (Clinical)	20	<b>1112</b>	Gilding Metal	9
<b>919b</b>	Sodium Chloride (Clinical)	20	<b>1113</b>	Gilding Metal	9
<b>920</b>	D-Mannitol	20	<b>1114</b>	Gilding Metal	9
<b>921a</b>	Cortisol (Hydrocortisone)	20	<b>1115</b>	Commercial Bronze Standard for Optical Emission and X-ray Spectroscopic Analysis	9
<b>924a</b>	Lithium Carbonate	20	<b>C1115</b>	Commercial Bronze A	9
<b>927e</b>	Bovine Serum Albumin (7 %, solution) (Total Protein Solution)	20, 21	<b>1116</b>	Commercial Bronze Standard for Optical Emission and X-ray Spectroscopic Analysis	9
<b>928</b>	Lead Nitrate (Clinical)	20	<b>1117</b>	Commercial Bronze Standard for Optical Emission and X-ray Spectroscopic Analysis	9
<b>929a</b>	Magnesium Gluconate	20	<b>C1117</b>	Commercial Bronze C	9
<b>931h</b>	Liquid Absorbance Filters, UV-VIS	68	<b>1124</b>	Free Cutting Brass (UNS C36000)	9
<b>935a</b>	Potassium Dichromate (Ultraviolet Absorbance Standard)	68	<b>1128</b>	Titanium-Base Alloy (15V-3Al-3Cr-3Sn)	10
<b>937</b>	Iron Metal (Clinical Standard)	20	<b>1129</b>	Solder (63Sn-37Pb)	9
<b>951a</b>	Boric Acid Isotopic Standard	16	<b>1131</b>	Solder (40Sn-60Pb)	9
<b>952</b>	Enriched Boric Acid Standard	16	<b>1132</b>	Lead-Base Bearing Metal (84Pb-10Sn-6Sn)	9
<b>953</b>	Neutron Density Monitor Wire	70	<b>1134</b>	Low-Alloy High-Silicon Steel	3
<b>955d</b>	Toxic Metals and Metabolites in Frozen Human Blood	20	<b>1135</b>	LA Steel, High Silicon	3
<b>956d</b>	Electrolytes in Frozen Human Serum	20, 21	<b>C1137a</b>	White Cast Iron	5
<b>965b</b>	Glucose in Frozen Human Serum	20, 21	<b>1138a</b>	Cast Steel Standard	5
<b>967a</b>	Creatinine in Frozen Human Serum	20, 21	<b>C1145a</b>	White Cast Iron	5
<b>968f</b>	Fat-Soluble Vitamins in Frozen Human Serum	20, 21	<b>C1151a</b>	Stainless Steel, 23Cr-7Ni	4
<b>971a</b>	Hormones in Frozen Human Serum	20, 21	<b>C1152a</b>	Stainless Steel, 18Cr-11Ni	4
<b>972a</b>	Vitamin D Metabolites in Frozen Human Serum	20, 21	<b>C1153a</b>	Stainless Steel, 17Cr-9Ni	4
<b>973</b>	Boric Acid Acidimetric Standard	14, 16	<b>C1154a</b>	Stainless Steel, 19Cr-13Ni	4
<b>975a</b>	Isotopic Standard for Chlorine	16	<b>1155a</b>	Stainless Steel, Cr 18 Ni 12 Mo 2 (AISI 316)	4
<b>977</b>	Isotopic Standard for Bromine	16	<b>1157</b>	Tool Steel (AISI M2)	4
<b>978a</b>	Assay-Isotopic Standard for Silver	16	<b>1158</b>	High-Nickel Steel (Nominal Mass Fraction 36 % Ni)	4
<b>979</b>	Chromium Isotopic Standard	16	<b>1159</b>	Electronic and Magnetic Alloy Standard	9
<b>980</b>	Isotopic Standard for Magnesium	16	<b>1160</b>	Electronic and Magnetic Alloy Standard	9
<b>981</b>	Common Lead Isotopic Standard (wire)	16	<b>1171</b>	Stainless Steel, Cr 17-Ni 11-Ti 0.3 (AISI 321)	4
<b>982</b>	Equal-Atom Lead Isotopic Standard (wire)	16	<b>1172</b>	Stainless Steel, Cr 17-Ni 11-Nb 0.6 (AISI 348)	4
<b>983</b>	Radiogenic Lead Isotopic Standard (wire)	16	<b>1173</b>	Ni-Cr-Mo-V Steel	5
<b>984</b>	Rubidium Chloride	16	<b>C1173</b>	Cast Steel 3	5
<b>986</b>	Isotopic Standard for Nickel	16	<b>1196a</b>	Standard Cigarette for Ignition Resistance Testing	90
<b>987</b>	Strontium Carbonate Isotopic Standard	16	<b>1218</b>	LA Steel, High Silicon	3
<b>994</b>	Isotopic Standard for Gallium	16	<b>1219</b>	Stainless Steel, Cr16 - Ni2 (AISI 431)	4
<b>997</b>	Thallium Isotopic Standard	16	<b>1223</b>	Chromium Steel	4
<b>998</b>	Angiotensin I (Human)	20	<b>1224</b>	LA Steel, Carbon (AISI 1078)	3
<b>999c</b>	Potassium Chloride Primary Standard (Dried at 500 °C)	14	<b>1225</b>	LA Steel (AISI 4130)	3
<b>1003c</b>	Glass Beads - Particle Size Distribution (20 µm to 50 µm diameter range)	84	<b>1226</b>	LA Steel	3
<b>1004b</b>	Glass Beads - Particle Size Distribution (40 µm to 150 µm diameter range)	84	<b>1227</b>	LA Steel, Basic Open Hearth, 1 % C	3
<b>1010a</b>	Microcopy Resolution Test Charts	68	<b>1228</b>	LA Steel, 0.1 % C	3
<b>1012</b>	Flooring Radiant Panel	90	<b>1230</b>	High-Temperature Alloy A286	3
<b>1017b</b>	Glass Beads - Particle Size Distribution (100 µm to 400 µm diameter range)	84	<b>1240c</b>	Aluminum Alloy 3004	8
<b>1018b</b>	Glass (Particle Size)	84	<b>1241c</b>	Aluminum Alloy 5182	8
<b>1019b</b>	Glass (Particle Size)	84	<b>1242</b>	High Temperature Alloy L 605	8
<b>1021</b>	Glass ( Particle Size)	84	<b>1243</b>	Ni-Cr-Co Alloy UNS N07001	9
<b>1034</b>	Unalloyed Copper	8	<b>1244</b>	Nickel Alloy UNS N06600	9
<b>1035</b>	Leaded-Tin Bronze Alloy (chip form)	8	<b>1246</b>	Incoloy 800	3
<b>1082</b>	Cigarette Ignition Strength Standard (200 cigarettes)	90	<b>1247</b>	Ni-Fe-Cr Alloy UNS N08825	3
<b>1085c</b>	Wear Metals in Lubricating Oil	56	<b>C1248</b>	Nickel-Copper Alloy	9
<b>1089†</b>	Steels, Set (consists of SRMs 1095, 1096, 1097, 1098 and 1099)	5	<b>1249</b>	Ni-Cr-Fe-Nb-Mo Alloy UNS N077178	9
<b>1090</b>	Oxygen in Ingot Iron	5	<b>1250</b>	High-Temperature Alloy Fe-Ni-Co	3
<b>1091a</b>	Oxygen in Stainless Steel (AISI 431)	5	<b>C1251a</b>	Phosphorus Deoxidized Copper - Cu VIII	8, 9
<b>1093</b>	Oxygen in Valve Steel	5	<b>C1252a</b>	Phosphorus Deoxidized Copper - Cu IX	8, 9
<b>1094</b>	Oxygen in Maraging Steel	5	<b>C1253a</b>	Phosphorus Deoxidized Copper - Cu X	8, 9
<b>1107</b>	Naval Brass UNS 46400	9	<b>1255b</b>	Aluminum Alloy 356	8
<b>1110</b>	Red Brass B	9	<b>1256b</b>	Aluminum Alloy 380	8
<b>1111</b>	Red Brass Standard	9	<b>1258-I</b>	Aluminum Alloy 6011 (Modified)	8
			<b>1259</b>	Aluminum Alloy 7075	8
			<b>1264a</b>	LA Steel, High Carbon (Modified)	3

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>1265a</b>	Electrolytic Iron	3
<b>1269</b>	Line Pipe (AISI 1526 Modified)	3
<b>1270</b>	LA Steel, Cr-Mo (A336) (F-22)	3
<b>1271</b>	LA Steel (HSLA-100)	3
<b>1276a</b>	Cupro-Nickel (CDA 715)	9
<b>C1285</b>	LA Steel (A242) (Modified)	3
<b>1286</b>	Low Alloy Steel (HY 80)	3
<b>C1290</b>	High-Alloy White Cast Iron (HC-250+V)	5
<b>C1291</b>	High-Alloy White Cast Iron (Ni-Hard, Type I)	5
<b>C1292</b>	High-Alloy White Cast Iron I (Ni-Hard, Type IV)	5
<b>1295</b>	Stainless Steel (SAE 405)	4
<b>C1296</b>	Stainless Steel	4
<b>1297</b>	Stainless Steel (SAE 201)	4
<b>1358b</b>	Coating Thickness Standard, (Nonmagnetic Coating on Steel)	77
<b>1359b</b>	Coating Thickness Standard (Nonmagnetic Coating on Steel)	77
<b>1362b</b>	Coating Thickness Standard (Nonmagnetic Coating on Steel)	77
<b>1363b</b>	Coating Thickness Standard (Nonmagnetic Coating on Steel)	77
<b>1364b</b>	Coating Thickness Standard (Nonmagnetic Coating on Steel)	77
<b>1400</b>	Bone Ash	20
<b>1401</b>	Trace Metals in Frozen Human Blood	20
<b>1411</b>	Soft Borosilicate Glass	52
<b>1412a</b>	Multicomponent Glass (disk form)	52
<b>1413</b>	High Alumina Sand	48, 52
<b>1416</b>	Aluminosilicate Glass for Liquidus Temperature	80
<b>1450e</b>	Thermal Conductivity - Fibrous Glass Board	65
<b>1452</b>	Thermal Resistance - Fibrous Glass Blanket for High Precision Measurements	65
<b>1453</b>	Thermal Conductivity - Expanded Polystyrene Board	65
<b>1457</b>	Superconducting Critical Current - Nb Ti Wire	74
<b>1459</b>	Thermal Resistance - Fumed Silica Board	65
<b>1473c</b>	Low Density Polyethylene Resin	62
<b>1474b</b>	Polyethylene Resin	62
<b>1475a</b>	Polyethylene, Linear	62
<b>1476a</b>	Branched Polyethylene Resin	62
<b>1478</b>	Polystyrene (Narrow Molecular Weight Distribution)	62
<b>1479</b>	Polystyrene (Narrow Molecular Weight Distribution)	62
<b>1482a</b>	Linear Polyethylene Narrow Molecular Mass Distribution (Nominal Mass-Average Molar Mass of 13 600 g/mol)	62
<b>1483a</b>	Linear Polyethylene Narrow Molecular Mass Distribution (Nominal Mass-Average Molar Mass of 32 100 g/mol)	62
<b>1484a</b>	Linear Polyethylene	62
<b>1486</b>	Bone Meal	20
<b>1488</b>	Poly (Methyl Methacrylate) (29 K Narrow Molecular Weight Distribution)	62
<b>1491a</b>	Methyl-Substituted Polycyclic Aromatic Hydrocarbons in Toluene	40
<b>1493</b>	Polychlorinated Biphenyl Congeners in 2,2,4-Trimethylpentane	40
<b>1494</b>	Aliphatic Hydrocarbons in 2,2,4-Trimethylpentane	40
<b>1496</b>	Unpigmented Polyethylene Gas Pipe Resin	62
<b>1507b</b>	11-Nor-Delta-9-Tetrahydrocannabinol-9-Carboxylic Acid in Freeze-Dried Urine	22, 58
<b>1514</b>	Thermal Analysis Purity Set	64
<b>1515</b>	Apple Leaves	45
<b>1543</b>	GC/MS System Performance	40
<b>1546a</b>	Meat Homogenate	44
<b>1547</b>	Peach Leaves	45

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>1548a</b>	Typical Diet	44
<b>1549a</b>	Whole Milk Powder	44
<b>1565</b>	Mycotoxins in Corn	44
<b>1566b</b>	Oyster Tissue	44
<b>1567b</b>	Wheat Flour	44
<b>1568b</b>	Rice Flour	44
<b>1570a</b>	Trace Elements in Spinach Leaves	44, 45
<b>1573a</b>	Tomato Leaves	45
<b>1575a</b>	Trace Elements in Pine Needles	45
<b>1577c</b>	Bovine Liver	44
<b>1588c</b>	Organics in Fish Oil	40
<b>1595</b>	Tripalmitin	20
<b>1597a</b>	Complex Mixture of Polycyclic Aromatic Hydrocarbons Coal Tar	40
<b>1598a</b>	Inorganic Constituents in Animal Serum	20
<b>1616b</b>	Sulfur in Kerosene (Low Level)	36
<b>1617b</b>	Sulfur in Kerosene (High Level)	36
<b>1619b</b>	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 0.7 %)	36
<b>1622e</b>	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 2 %)	36
<b>1623d</b>	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 0.2 %)	36
<b>1624d</b>	Sulfur in Diesel Fuel Oil (Nominal Mass Fraction 0.4%)	36
<b>1632e</b>	Trace Elements in Coal (Bituminous)	27, 37
<b>1633c</b>	Trace Elements in Coal Fly Ash	37
<b>1634c</b>	Trace Elements in Fuel Oil	36
<b>1635a</b>	Trace Elements in Coal, (Subbituminous)	36, 37
<b>1640a</b>	Trace Elements in Natural Water	26
<b>1641e</b>	Mercury in Water	26
<b>1643f</b>	Trace Elements in Water	26
<b>1646a</b>	Estuarine Sediment	26, 49
<b>1647f</b>	Priority Pollutant Polycyclic Aromatic Hydrocarbons in Acetonitrile	40
<b>1648a</b>	Urban Particulate Matter	22, 24, 26
<b>1649b</b>	Urban Dust	22, 40
<b>1650b</b>	Diesel Particulate Matter	22, 40
<b>1655</b>	Potassium Chloride, KCl (cr) for Solution Calorimetry	64
<b>1656</b>	Thianthrene Combustion Calorimetric Standard	64
<b>1657</b>	Synthetic Refuse-Derived Fuel Combustion Calorimetric Standard	64
<b>1658a</b>	Methane in Air (Nominal Amount-of-Substance Fraction 1 µmol/mol)	31
<b>1659a</b>	Methane in Air (Nominal Amount-of-Substance Fraction 10 µmol/mol)	31
<b>1660a</b>	Methane and Propane in Air (Nominal Amount-of-Substance Fraction: 4 µmol/mol Methane; 1 µmol/mol Propane)	32
<b>1661a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol)	33
<b>1662a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 µmol/mol)	33
<b>1663a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1500 µmol/mol)	33
<b>1664a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 2500 µmol/mol)	33
<b>1665b</b>	Propane in Air (Nominal Amount-of-Substance Fraction 3 µmol/mol)	32
<b>1666b</b>	Propane in Air (Nominal Amount-of-Substance Fraction 10 µmol/mol)	32

\* The SRMs that are marked with \* are available as NIST Traceable Reference Materials from commercial suppliers.

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>1667b</b>	Propane in Air (Nominal Amount-of-Substance Fraction 50 µmol/mol)	32
<b>1668b*</b>	Propane in Air (Nominal Amount-of-Substance Fraction 100 µmol/mol)	32
<b>1669b</b>	Propane in Air (Nominal Amount-of-Substance Fraction 500 µmol/mol)	32
<b>1674b*</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 7 % mol/mol)	31
<b>1677c*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 10 µmol/mol)	30
<b>1678c*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 50 µmol/mol)	30
<b>1679c*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 100 µmol/mol)	30
<b>1680b*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol)	30
<b>1681b*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 µmol/mol)	30
<b>1683b*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 50 µmol/mol)	32
<b>1684b*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 100 µmol/mol)	32
<b>1685b*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 250 µmol/mol)	32
<b>1686b*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol)	32
<b>1687b*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 µmol/mol)	32
<b>1689</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 5 µmol/mol)	33
<b>1690</b>	Polystyrene Spheres (1 µm Diameter Particle Size)	84
<b>1691</b>	Polystyrene Spheres (0.3 µm Diameter Particle Size)	84
<b>1693a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 50 µmol/mol)	33
<b>1694a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 100 µmol/mol)	33
<b>1696a*</b>	Sulfur Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 3500 µmol/mol)	33
<b>1718</b>	Nitrous Oxide in Air (Nominal Amount-of-Substance Fraction 1 µmol/mol)	32
<b>1720</b>	Northern Continental Air	31
<b>1721</b>	Southern Oceanic Air	31
<b>1722</b>	Halocarbons in Continental Air (Nominal Amount-of-Substance Fraction - Ambient)	31
<b>1727</b>	Anode Tin	10
<b>1728</b>	Tin Alloy (Sn-3Cu-0.5Ag)	10
<b>1729</b>	Tin Alloy (97Sn-3Pb)	10
<b>1738</b>	Zinc-Aluminum Alloy	10
<b>1740</b>	Zinc-Aluminum Alloy	10
<b>1741</b>	Zinc-Aluminum Alloy	10
<b>1746</b>	Silver Freezing-Point Standard	64
<b>1749</b>	Gold versus Platinum Thermocouple Certified Thermometer	65
<b>1754</b>	Low-Alloy Steel, AISI 4320	5
<b>1755</b>	Nitrogen in Low Alloy Steel	5
<b>1761a</b>	Low Alloy Steel	3
<b>1762a</b>	Low Alloy Steel	3

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>1763b</b>	Low Alloy Steel	3
<b>1764a</b>	Low Alloy Steel	3
<b>1765</b>	Low Alloy Steel	3
<b>1766</b>	Low Alloy Steel	3
<b>1767</b>	Low Alloy Steel	3
<b>1768</b>	High-Purity Iron	3
<b>1772</b>	Tool Steel (S-7)	4
<b>1775</b>	Refractory Alloy MP-35-N	8, 9
<b>1810a</b>	Linerboard	95
<b>1818a</b>	Chlorine in Lubricating Base Oils	56
<b>1819a</b>	Sulfur in Lubricating Base Oil	56
<b>1828c</b>	Ethanol-Water Solutions (Six Levels)	21, 58
<b>1830</b>	Soda Lime Float Glass (Nominal Mass Fraction 0.1 % Al <sub>2</sub> O <sub>3</sub> )	52
<b>1831</b>	Soda Lime Sheet Glass (Nominal Mass Fraction 1.2 % Al <sub>2</sub> O <sub>3</sub> )	52
<b>1835</b>	Borate Ore	48
<b>1845a</b>	Whole Egg Powder	44
<b>1848</b>	Lubricating Oil Additive Package	56
<b>1849a</b>	Infant/Adult Nutritional Formula I (milk-based)	44
<b>1857</b>	Tool Steel for Abrasive Wear Standard	88
<b>1866b</b>	Common Commercial Asbestos	22
<b>1869</b>	Infant/Adult Nutritional Formula II (milk/whey/soy-based)	44
<b>1877</b>	Beryllium Oxide Powder	22
<b>1878b</b>	Respirable Alpha Quartz (Quantitative X-Ray Powder Diffraction Standard)	22, 82
<b>1879b</b>	Respirable Cristobalite (Quantitative X-Ray Powder Diffraction Standard)	22, 82
<b>1880b</b>	Portland Cement	54
<b>1881b</b>	Portland Cement (Blended with Fly Ash)	54
<b>1882a</b>	Calcium Aluminate Cement	54
<b>1883a</b>	Calcium Aluminate Cement	54
<b>1884b</b>	Portland Cement	54
<b>1885b</b>	Portland Cement	54
<b>1886a</b>	Portland Cement (White Portland Cement with Low Iron)	54
<b>1886b</b>	White Portland Cement	54
<b>1887b</b>	Portland Cement	54
<b>1888b</b>	Portland Cement	54
<b>1889b</b>	Portland Cement (Blended with Limestone)	54
<b>1893</b>	Copper Microhardness Test Block (Knoop)	88
<b>1894a</b>	Vickers Microhardness of Copper	88
<b>1895</b>	Nickel Microhardness Test Block (Knoop)	88
<b>1896b</b>	Vickers Microhardness of Nickel	88
<b>1898</b>	Titanium Dioxide Nanomaterial	85, 92
<b>1900</b>	Specific Surface Area Standard	85
<b>1905</b>	Nickel Microhardness Test Block (Knoop)	88
<b>1906</b>	Nickel Microhardness Test Block (Knoop)	88
<b>1907</b>	Nickel Microhardness Test Block (Knoop)	88
<b>1908</b>	Vickers Microhardness of Nickel	88
<b>1909</b>	Vickers Microhardness of Nickel	88
<b>1917</b>	Mercury Porosimetry Standard	85
<b>1921b</b>	IR Transmission Wavelength (Polystyrene Film)	68
<b>1928</b>	Infrared Specular High Reflectance Standard (Nominal Diameter 51 mm)	68
<b>1929</b>	Infrared High Reflectance Specular Standard (Nominal Diameter 25 mm)	68
<b>1932</b>	Fluorescein Solution	68
<b>1934</b>	Fluorescent Dyes for Quantitative Flow Cytometry (Visible Spectral Range)	68
<b>1941b</b>	Organics in Marine Sediment	40
<b>1944</b>	New York/New Jersey Waterway Sediment	26, 27, 40, 49

\* The SRMs that are marked with \* are available as NIST Traceable Reference Materials from commercial suppliers.

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>1945</b>	Organics in Whale Blubber	40
<b>1946</b>	Lake Superior Fish Tissue	26, 40, 41, 44
<b>1947</b>	Lake Michigan Fish Tissue	26, 40, 41, 44
<b>1949</b>	Frozen Human Prenatal Serum	20, 21
<b>1950</b>	Metabolites in Frozen Human Plasma	20, 21
<b>1951c</b>	Lipids in Frozen Human Serum	20, 21
<b>1953</b>	Organic Contaminants in Non-Fortified Human Milk	40, 44
<b>1954</b>	Organic Contaminants in Fortified Human Milk	40, 44
<b>1955</b>	Homocysteine and Folate in Frozen Human Serum	20, 21
<b>1957</b>	Organic Contaminants in Non-Fortified Human Serum	21, 40, 41
<b>1958</b>	Organic Contaminants in Fortified Human Serum	21, 40, 41
<b>1961</b>	Polystyrene Spheres (30 µm Diameter Particle Size)	84
<b>1963a</b>	Polystyrene Spheres (100 nm Diameter Particle Size)	84, 92
<b>1964</b>	Polystyrene Spheres (60 nm Diameter Particle Size)	84, 92
<b>1967a</b>	High-Purity Platinum Thermoelement (platinum wire)	65
<b>1968</b>	Gallium Melting-Point Standard	65
<b>1972</b>	1,3-Dioxolan-2-one Triple Point Standard	65
<b>1974c</b>	Organics in Mussel Tissue ( <i>Mytilus edulis</i> )	40
<b>1975</b>	Diesel Particulate Extract	22, 40
<b>1976c</b>	Instrument Response Standard for X-Ray Powder Diffraction	82
<b>1978</b>	Particles Size Distribution Standard for Gravity Sedimentation	84
<b>1979</b>	Powder Diffraction Line Profile Standard for Crystallite Size Analysis (Nano-Crystalline ZnO Powder)	82
<b>1980</b>	Positive Electrophoretic (+µE) Mobility Standard (500 mg/L)	85
<b>1982</b>	Thermal Spray Powder - Particle Size Distribution Yttria-Stabilized Zirconia (Spheroidal)	84
<b>1984</b>	Thermal Spray Powder - Particle Size Distribution Tungsten Carbide/Cobalt (Acicular)	84
<b>1985</b>	Thermal Spray Powder - Particle Size Distribution Tungsten Carbide/Cobalt (Spheroidal)	84
<b>1990</b>	Single Crystal Diffractometer Alignment Standard - Ruby Sphere	82
<b>1991</b>	Mix Coal Tar/Petroleum Extract in Methylene Chloride	40
<b>1992</b>	Zeta Potential - Colloidal Silica (Nominal Mass Fraction 0.15 %)	85
<b>1993</b>	Zeta Potential - Colloidal Silica (Nominal Mass Fraction 2.2 %)	85
<b>2000</b>	Calibration Standard for High-Resolution X-Ray Diffraction	82
<b>2031c</b>	Metal-on-Fused-Silica Neutral Density Filters (250 nm to 635 nm)	68
<b>2034</b>	Holmium Oxide Solution Wavelength Standard from 240 nm to 650 nm	68
<b>2035b</b>	Ultraviolet-Visible-Near-Infrared Wavelength/Wavenumber Transmission Standard	68
<b>2036</b>	Near Infrared Wavelength/Wavenumber Reflection Standard	68
<b>2061</b>	TiAl(NbW) Alloy for Microanalysis	10, 12
<b>2066</b>	K-411 Glass Microspheres	12
<b>2073a</b>	Sinusoidal Roughness Specimen	88
<b>2074</b>	Sinusoidal Roughness Specimen	88

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>2082</b>	Pathlength Absorbance Standards for Microliter Volume Spectrophotometers	68
<b>2092</b>	Low-Energy Charpy V-Notch Specimens (NIST-Verification, 8-mm Striker)	94
<b>2093</b>	Low-Energy Charpy V-Notch Specimens (Self-Verification, 8-mm Striker)	94
<b>2096</b>	High-Energy Charpy V-Notch Specimens (NIST-Verification, 8-mm Striker)	94
<b>2097</b>	High-Energy Charpy V-Notch Specimens (Self-Verification, 8-mm Striker)	94
<b>2098</b>	Super-High-Energy Charpy V-Notch Specimens (NIST-Verification, 8-mm Striker)	94
<b>2100a</b>	Fracture Toughness of Ceramic	96
<b>2100b</b>	Fracture Toughness of Ceramic	96
<b>2112</b>	Dynamic Impact Force Verification Specimens (Self-Verification, 8-mm Striker, 24 kN nominal)	94
<b>2113</b>	Dynamic Impact Force Verification Specimens (Self-Verification, 8-mm Striker, 33 kN nominal)	94
<b>2133</b>	Phosphorus Implant in Si Depth Profile	76
<b>2134</b>	Arsenic Implant in Silicon Depth Profile Standard	76
<b>2135c</b>	Ni/Cr Thin Film Depth Profile	76
<b>2137</b>	Boron Implant in Silicon Standard for Calibration of Concentration in a Depth Profile	76
<b>2139</b>	Zinc-Aluminum Alloy (chip form)	10
<b>2141</b>	Urea	14
<b>2143</b>	p-Fluorobenzoic Acid	14
<b>2144</b>	m-Chlorobenzoic Acid	14
<b>2152</b>	Urea Combustion Calorimetric Standard	64
<b>2160</b>	Low-Alloy Steel (pin form)	2
<b>2161</b>	Low Alloy Steel (chip form)	2
<b>2162</b>	Low Alloy Steel (chip form)	2
<b>2163</b>	Low Alloy Steel (chip form)	2
<b>2164</b>	Low Alloy Steel (chip form)	2
<b>2165</b>	Low Alloy Steel (chip form)	2
<b>2166</b>	Low Alloy Steel (chip form)	2
<b>2167</b>	Low Alloy Steel (chip form)	2
<b>2168</b>	High-Purity Iron (chip form)	2
<b>2171</b>	LA Steel, (HSLA 100)	2
<b>2175</b>	Refractory Alloy MP-35-N (chip form)	8, 9
<b>2181</b>	HEPES	60
<b>2182</b>	HEPES Sodium Salt	60
<b>2185</b>	Potassium Hydrogen Phthalate pD Standard	60
<b>2186I</b>	Potassium Dihydrogen Phosphate	60
<b>2186II</b>	Disodium Hydrogen Phosphate	60
<b>2191a</b>	Sodium Bicarbonate	60
<b>2192a</b>	Sodium Carbonate	60
<b>2193a</b>	Calcium Carbonate [used as saturated Ca(OH) <sub>2</sub> solution]	60
<b>2197</b>	Low-Energy Charpy V-Notch Specimens (Self-Verification, 2-mm Striker)	94
<b>2198</b>	High-Energy Charpy V-Notch Specimens (Self-Verification, 2-mm Striker)	94
<b>2201</b>	Sodium Chloride (Ion-Selective)	60
<b>2203</b>	Potassium Fluoride (Standard for Ion-Selective Electrodes)	60
<b>2206</b>	Controlled Pore Glass - BET Specific Surface Area (300 nm)	85
<b>2207</b>	Controlled Pore Glass - BET Specific Surface Area (Nominal Pore Diameter 18 nm)	85
<b>2214</b>	Isooctane Liquid Density	80
<b>2216</b>	Miniaturized Low-Energy Charpy V-Notch KLST Specimens (Self-Verification)	94
<b>2218</b>	Miniaturized High-Energy Charpy V-Notch KLST Specimens (Self-Verification)	94

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>	<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>2219</b>	Miniaturized Super-High-Energy Charpy V-Notch KLST Specimens (Self-Verification)	94	<b>C2417</b>	Lead-Base Alloy	9
<b>2232</b>	Indium DSC Calibration Standard - Temperature and Enthalpy of Fusion	64	<b>C2418</b>	High-Purity Lead	9
<b>2234</b>	Gallium for Thermal Analysis	64	<b>C2424</b>	Ductile Iron C	5
<b>2235</b>	Bismuth for Thermal Analysis	64	<b>2426</b>	55 % Aluminum-Zinc Alloy	8, 10
<b>2241</b>	Relative Intensity Correction Standard for Raman Spectroscopy: 785 nm Excitation	68	<b>2429</b>	Flue Gas Desulfurization Gypsum	37, 45, 48, 54
<b>2242a</b>	Relative Intensity Correction Standard for Raman Spectroscopy: 532 nm Excitation	68	<b>2430</b>	Scheelite Ore	48
<b>2244</b>	Relative Intensity Correction Standard for Raman Spectroscopy: 1064 nm Excitation	68	<b>2431</b>	Titanium-Base Alloy (6Al-2Sn-4Zr-6Mo) (chip form)	10
<b>2245</b>	Relative Intensity Correction Standard for Raman Spectroscopy: 633 nm Excitation	68	<b>2432</b>	Titanium-Base Alloy (10V-2Fe-3Al) (chip form)	10
<b>2246</b>	Relative Intensity Correction Standard for Raman Spectroscopy: 830 nm Excitation	68	<b>2433</b>	Titanium-Base Alloy (8Al-1Mo-1V) (chip form)	10
<b>2257</b>	PBDE Congeners in 2,2,4-Trimethylpentane	40	<b>2445</b>	Mercury in Iodinated Activated Carbon	27
<b>2258</b>	BDE 209 in 2,2,4-Trimethylpentane	40	<b>2448</b>	Mercury in Brominated Activated Carbon	27
<b>2259</b>	PCB Congeners in 2,2,4-Trimethylpentane	40	<b>2451</b>	Fine Carbon (Activated) From Cyanide Ore Leaching	26, 27
<b>2260a</b>	Aromatic Hydrocarbon in Toluene	40	<b>2452</b>	Hydrogen In Titanium Alloy (Nominal Mass Fraction 60 mg/kg H) (chip form)	10
<b>2261</b>	Chlorinated Pesticides in Hexane (Nominal Mass Concentration 2 µg/mL)	40	<b>2453a</b>	Hydrogen In Titanium Alloy (Nominal Mass Fraction 125 mg/kg H) (pin form)	10
<b>2262</b>	Chlorinated Biphenyl Cogeners in 2,2,4-Trimethylpentane (Nominal Mass Concentration 2 µg/mL)	40	<b>2454</b>	Hydrogen In Titanium Alloy (Nominal Mass Fraction 200 mg/kg H) (chip form)	10
<b>2266</b>	Hopanes and Steranes in 2,2,4 Trimethylpentane	40	<b>2460a</b>	Standard Bullet Replica	41, 58, 96
<b>2269</b>	Perdeuterated PAH-I Solution in Hexane/Toluene	40	<b>2461</b>	Standard Cartridge Case	41, 58, 96
<b>2270</b>	Perdeuterated PAH-II Solution in Hexane/Toluene	40	<b>2483</b>	Single-Wall Carbon Nanotubes (Raw Soot)	12, 92
<b>2274</b>	PCB Congener Solution-II in 2,2,4-Trimethylpentane	40	<b>2484</b>	Multiwall Carbon Nanotubes (Raw Soot)	92
<b>2275</b>	Chlorinated Pesticide Solution-II in Isooctane	40	<b>2492</b>	Bingham Paste Mixture for Rheological Measurements	62
<b>2285</b>	Ignitable Liquids Test Mixture	41, 58	<b>2493</b>	Bingham Mortar Mixture for Rheological Measurements	62
<b>2294</b>	Reformulated Gasoline (Nominal Mass Fraction 11 % MTBE)	36	<b>2497</b>	Bingham Concrete Mixture for Rheological Measurements	62
<b>2295</b>	Reformulated Gasoline (Nominal Mass Fraction 15 % MTBE)	36	<b>2556</b>	Used Auto Catalyst (Pellets)	27
<b>2296</b>	Reformulated Gasoline (Nominal Mass Fraction 13 % ETBE)	36	<b>2557</b>	Used Auto Catalyst (Monolith)	27
<b>2297</b>	Reformulated Gasoline (Nominal Mass Fraction 10 % Ethanol)	36	<b>2569</b>	Lead Paint Films for Children's Products	24
<b>2298</b>	Sulfur in Gasoline (High-Octane)	36	<b>2570</b>	Lead Paint Film for Portable X-Ray Fluorescence Analyzers - Blank (Color: White)	24
<b>2299</b>	Sulfur in Gasoline (Reformulated)	36	<b>2571</b>	Lead Paint Film for Building Surfaces (Nominal Pb 3.5 mg/cm <sup>2</sup> )(Color: Yellow)	24
<b>2365</b>	BK Virus DNA Quantitative Standard	20, 23	<b>2572</b>	Lead Paint Film for Building Surfaces (Nominal Pb 1.6 mg/cm <sup>2</sup> )(Color: Orange)	24
<b>2366a</b>	Cytomegalovirus DNA (Towne <sub>147</sub> BAC) for DNA Measurements	20, 23	<b>2573</b>	Lead Paint Film for Building Surfaces (Nominal Pb 1.0 mg/cm <sup>2</sup> )(Color: Red)	24
<b>2372a</b>	Human DNA Quantitation Standard	23, 58	<b>2574</b>	Lead Paint Film for Building Surfaces (Nominal Pb 0.7 mg/cm <sup>2</sup> )(Color: Gold)	24
<b>2373</b>	Genomic DNA Standards for <i>HER2</i> Measurements	23	<b>2575</b>	Lead Paint Film for Building Surfaces (Nominal Pb 0.3 mg/cm <sup>2</sup> )(Color: Green)	24
<b>2374</b>	DNA Sequence Library for External RNA Controls	23, 58	<b>2576</b>	Lead Paint Film for Building Surfaces (Nominal Pb 5.6 mg/cm <sup>2</sup> )(Color: Blue)	24
<b>2377</b>	Fatty Acid Methyl Esters in 2,2,4-Trimethylpentane	37, 40	<b>2579a</b>	Lead Paint Films For Building Surfaces (SRM 2570 through SRM 2575)	24
<b>2378</b>	Fatty Acids in Frozen Human Serum	20, 21	<b>2580</b>	Powdered Paint (Nominal Mass Fraction 4 % Lead)	24
<b>2383a</b>	Baby Food Composite	44	<b>2581</b>	Powdered Paint (Nominal Mass Fraction 0.5 % Lead)	24
<b>2384</b>	Baking Chocolate	44	<b>2582</b>	Powdered Paint (Nominal Mass Fraction 200 mg/kg Lead)	24
<b>2385</b>	Slurried Spinach	26, 44	<b>2583</b>	Trace Elements in Indoor Dust (Nominal Mass Fraction of 90 mg/kg Lead)	22, 24, 26
<b>2387</b>	Peanut Butter	26, 44	<b>2584</b>	Trace Elements in Indoor Dust (Nominal Mass Fraction of 1% Lead)	22, 24, 26
<b>2389a</b>	Amino Acids in 0.1 mol/L Hydrochloric Acid	20	<b>2585</b>	Organic Contaminants in House Dust	22, 40, 41
<b>2391d</b>	PCR-Based DNA Profiling Standard	23, 58	<b>2586</b>	Trace Elements in Soil Containing Lead From Paint (Nominal Mass Fraction 500 mg/kg Lead)	24, 26, 41, 49
<b>2392</b>	Mitochondrial DNA Sequencing (Human)	23, 58	<b>2587</b>	Trace Elements in Soil (Nominal Mass Fraction of 3000 mg/kg Lead)	24, 26, 49
<b>2392-I</b>	Mitochondrial DNA Sequencing (Human HL-60 DNA)	23, 58	<b>2589</b>	Powdered Paint (Nominal Mass Fraction 10% Lead)	24
<b>2393</b>	CAG Repeat Length Mutation in Huntington's Disease	23	<b>2613a</b>	Carbon Monoxide in Air (Nominal Amount-of-Substance Fraction 20 µmol/mol)	30
<b>2396</b>	Oxidative DNA Damage Mass Spectrometry Standards	23, 58			
<b>C2400</b>	Fe-Cr-Ni Alloy UNS J92180	3			
<b>C2402</b>	Hastelloy 7C	9			
<b>C2415a</b>	Battery Lead (UNS 52770)	9			
<b>C2416</b>	Bullet Lead	9			

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>2614a</b>	Carbon Monoxide in Air (Nominal Amount-of-Substance Fraction 45 µmol/mol) . . .	30
<b>2617</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 µmol/mol) . . .	31
<b>2619a</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 0.5 % mol/mol) . . .	31
<b>2620a</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1 % mol/mol) . . .	31
<b>2621a</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 1.5 % mol/mol) . . .	31
<b>2622a</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 2 % mol/mol) . . .	31
<b>2624a</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 3 % mol/mol) . . .	31
<b>2625a*</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 3.5 % mol/mol) . . .	31
<b>2627a*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 5 µmol/mol) . . .	32
<b>2628a*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 10 µmol/mol) . . .	32
<b>2629a*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 20 µmol/mol) . . .	32
<b>2630*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 1500 µmol/mol) . . .	32
<b>2631a*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 3000 µmol/mol) . . .	32
<b>2635a*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 25 µmol/mol) . . .	30
<b>2636a*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 250 µmol/mol) . . .	30
<b>2637a*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 2500 µmol/mol) . . .	30
<b>2638a*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 5000 µmol/mol) . . .	30
<b>2639a</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 1 % mol/mol) . . .	30
<b>2640a</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 2 % mol/mol) . . .	30
<b>2641a</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 4 % mol/mol) . . .	30
<b>2642a*</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 8 % mol/mol) . . .	30
<b>2644a</b>	Propane in Nitrogen (Nominal Amount-of-Substance Fraction 250 µmol/mol) . . .	32
<b>2647a</b>	Propane in Nitrogen (Nominal Amount-of-Substance Fraction 2500 µmol/mol) . . .	32
<b>2657a*</b>	Oxygen in Nitrogen (Nominal Amount-of-Substance Fraction 2 % mol/mol) . . .	33
<b>2658a*</b>	Oxygen in Nitrogen (Nominal Amount-of-Substance Fraction 10 % mol/mol) . . .	33
<b>2659a*</b>	Oxygen in Nitrogen (Nominal Amount-of-Substance Fraction 21 % mol/mol) . . .	33
<b>2660a*</b>	Total Oxides of Nitrogen (NO <sub>x</sub> ) in Air (Nominal Amount-of-Substance Fraction 100 µmol/mol) . . .	32
<b>2668</b>	Toxic Elements in Frozen Human Urine . . . . .	20, 21
<b>2669</b>	Arsenic Species in Frozen Human Urine . . . . .	20, 21
<b>2682c</b>	Subbituminous Coal (Nominal Mass Fraction 0.5 % Sulfur) . . .	36

\* The SRMs that are marked with \* are available as NIST Traceable Reference Materials from commercial suppliers.

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>2683c</b>	Bituminous Coal (Nominal Mass Fraction 2 % Sulfur) . . . . .	36
<b>2684c</b>	Bituminous Coal (Nominal Mass Fraction 3 % Sulfur) . . . . .	36
<b>2685c</b>	Bituminous Coal (Nominal Mass Fraction 5 % Sulfur) . . . . .	36
<b>2686a</b>	Portland Cement Clinker . . . . .	54
<b>2687a</b>	Portland Cement Clinker . . . . .	54
<b>2688</b>	Portland Cement Clinker . . . . .	54
<b>2689</b>	Coal Fly Ash . . . . .	37, 85
<b>2690</b>	Coal Fly Ash . . . . .	37, 85
<b>2691</b>	Coal Fly Ash . . . . .	37, 85
<b>2693</b>	Bituminous Coal (Nominal Mass Fraction 0.5 % Sulfur) . . . . .	36
<b>2696</b>	Silica Fume (powder form) . . . . .	26, 52, 54, 85
<b>2700</b>	Hexavalent Chromium in Contaminated Soil (Low Level) . . . . .	26, 49
<b>2701</b>	Hexavalent Chromium in Contaminated Soil (High Level) . . . . .	26, 49
<b>2702</b>	Inorganics in Marine Sediment . . . . .	26, 49
<b>2703</b>	Sediment for Solid Sampling (Small Sample) Analytical Techniques . . . . .	26, 49
<b>2706</b>	New Jersey Soil, Organics and Trace Elements . . . . .	26,40,49
<b>2709a</b>	San Joaquin Soil Baseline Trace Element Concentrations . . . . .	26,49
<b>2710a</b>	Montana I Soil Highly Elevated Trace Element Concentrations . . . . .	26,49
<b>2711a</b>	Montana II Soil Moderately Elevated Trace Element Concentrations . . . . .	26,49
<b>2716</b>	Sulfur in Gasoline (<1 mg/kg) . . . . .	36
<b>2717a</b>	Sulfur in Residual Fuel Oil (Nominal Mass Fraction 3 %) . . . . .	36
<b>2718a</b>	Green Petroleum Coke . . . . .	27, 36, 37
<b>2719</b>	Calcined Petroleum Coke . . . . .	27, 36, 37
<b>2720</b>	Sulfur in Di- <i>n</i> -Butyl Sulfide . . . . .	36
<b>2721</b>	Crude Oil (Light-Sour) . . . . .	36, 37
<b>2722</b>	Crude Oil (Heavy Sweet) . . . . .	36, 37
<b>2723b</b>	Sulfur in Diesel Fuel Oil (Nominal Mass Fraction 10 mg/kg) . . . . .	36
<b>2730</b>	Hydrogen Sulfide in Nitrogen (Nominal Amount-of-Substance Fraction 5 µmol/mol) . . . . .	31
<b>2731</b>	Hydrogen Sulfide in Nitrogen (Nominal Amount-of-Substance Fraction 20 µmol/mol) . . . . .	31
<b>2735</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 800 µmol/mol) . . . . .	32
<b>2737*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 500 nmol/mol) . . . . .	32
<b>2738*</b>	Nitric Oxide in Nitrogen (Nominal Amount-of-Substance Fraction 1000 nmol/mol) . . . . .	32
<b>2740a</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 10 % mol/mol) . . . . .	30
<b>2741a</b>	Carbon Monoxide in Nitrogen (Nominal Amount-of-Substance Fraction 13 % mol/mol) . . . . .	30
<b>2745*</b>	Carbon Dioxide in Nitrogen (Nominal Amount-of-Substance Fraction 16 % mol/mol) . . . . .	31
<b>2750</b>	Methane in Air (Nominal Amount-of-Substance Fraction 50 µmol/mol) . . . . .	31
<b>2751</b>	Methane in Air (Nominal Amount-of-Substance Fraction 100 µmol/mol) . . . . .	31
<b>2764</b>	Propane in Air (Nominal Amount-of-Substance Fraction 0.25 µmol/mol) . . . . .	32
<b>2765</b>	Propane in Air (Nominal Amount-of-Substance Fraction 100 nmol/mol) . . . . .	32
<b>2770</b>	Sulfur in Diesel Fuel Oil (Nominal Mass Fraction 40 mg/kg) . . . . .	36

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>	<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>2771</b>	Sulfur in Diesel Fuel Blend Stock	36	<b>2897a</b>	Ethanol Water Solution (Nominal Mass Fraction 2 %)	21, 58
<b>2772</b>	B100 Biodiesel (Soy-Based)	37	<b>2898a</b>	Ethanol Water Solution (Nominal Mass Fraction 6 %)	21, 58
<b>2773</b>	B100 Biodiesel (Animal-Based)	36, 37	<b>2899a</b>	Ethanol-Water Solution (Nominal Mass Fraction 25 %)	21, 58
<b>2775</b>	Sulfur in Foundry Coke	27, 36	<b>2900</b>	Ethanol-Water Solution (Nominal Mass Fraction 95.6 %)	21, 58
<b>2776</b>	Sulfur in Furnace Coke	27, 36	<b>2910b</b>	Hydroxyapatite	22
<b>2777</b>	Weathered Gulf of Mexico Crude Oil in Toluene	40	<b>2921</b>	Human Cardiac Troponin Complex	20, 21
<b>2778</b>	Mercury in Crude Oil	36	<b>2924</b>	C-Reactive Protein Solution	20
<b>2779</b>	Gulf of Mexico Crude Oil	40	<b>2925</b>	Recombinant Human Serum Albumin Solution (Primary Reference Calibrator for Urine Albumin) (Frozen)	20, 21
<b>2780a</b>	Hard Rock Mine Waste	26, 48, 49	<b>2926</b>	Recombinant Human Insulin-like Growth Factor 1 (Frozen)	22
<b>2781</b>	Domestic Sludge	26, 40, 41, 49	<b>2927</b>	<sup>15</sup> N-Labeled Recombinant Human Insulin-like Growth Factor 1 (Frozen)	22
<b>2782</b>	Industrial Sludge	26, 49	<b>2940a</b>	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Orange Emission	68
<b>2783</b>	Air Particulate on Filter Media (47 mm dia)	22, 24, 26	<b>2941a</b>	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Green Emission	68
<b>2786</b>	Fine Atmospheric Particulate Matter (Mean Particle Diameter < 4 µm)	22, 40	<b>2942</b>	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Ultraviolet Emission	68
<b>2787</b>	Fine Atmospheric Particulate Matter (Mean Particle Diameter < 10 µm)	22, 40	<b>2943</b>	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Blue Emission	68
<b>2790</b>	Inorganic Constituents in Hardwood Biomass Material	37	<b>2944</b>	Relative Intensity Correction Standard for Fluorescence Spectroscopy: Red Emission	68
<b>2791</b>	Inorganic Constituents in Softwood Biomass Material	37	<b>2950a</b>	Respirable Alpha Quartz on Filter Media (Nominal Mass of Alpha Quartz: 5 µg - 500 µg)	22
<b>2798a</b>	Vickers Microhardness of Nickel	88	<b>2960</b>	Respirable Cristobalite on Filter Media (Nominal Mass of Cristobalite: 5 µg - 250 µg)	22
<b>2806b</b>	Medium Test Dust (MTD) in Hydraulic Fluid	85	<b>2971</b>	24R, 25-Dihydroxyvitamin D3 Calibration Solution	20
<b>2810</b>	Rockwell C Hardness - Low Range	88	<b>2972a</b>	25-Hydroxyvitamin D Calibration Solutions	20
<b>2811</b>	Rockwell C Hardness - Mid Range	88	<b>2973</b>	Vitamin D Metabolites in Frozen Human Serum (High Level)	20, 21
<b>2812</b>	Rockwell C Scale Hardness - High Range	88	<b>2974a</b>	Organics in Freeze-Dried Mussel Tissue ( <i>Mytilus edulis</i> )	40
<b>2816</b>	Rockwell Hardness 15N Scale - Low Range (Nominal 72 HR15N)	88	<b>2975</b>	Diesel Particulate Matter	22, 40
<b>2817</b>	Rockwell Hardness 15N Scale - Mid Range (Nominal 83 HR15N)	88	<b>2976</b>	Trace Elements and Methylmercury in Mussel Tissue (Freeze-Dried)	26
<b>2818</b>	Rockwell Hardness 15N Scale - High Range (Nominal 91 HR15N)	88	<b>3030</b>	Monomethylarsonic Acid Standard Solution	16, 20
<b>2819</b>	Rockwell Hardness 30N Scale - Low Range (Nominal 45 HR30N)	88	<b>3031</b>	Dimethylarsinic Acid Standard Solution	16, 20
<b>2820</b>	Rockwell Hardness 30N Scale - Mid Range (Nominal 64 HR30N)	88	<b>3033</b>	Arsenobetaine Standard Solution	16, 20
<b>2821</b>	Rockwell Hardness 30N Scale - High Range (Nominal 79 HR30N)	88	<b>3034</b>	Arsenocholine Standard Solution	16, 20
<b>2828</b>	Knoop Microhardness of Steel	88	<b>3035</b>	Arsenic Species in Apple Juice	44
<b>2829</b>	Vickers Microhardness of Steel	88	<b>3036</b>	Arsenic Acid (AsV) Standard Solution	16, 20
<b>2830</b>	Knoop Hardness of Ceramics	88	<b>3037</b>	Arsenous Acid (AsIII) Standard Solution	16, 20
<b>2831</b>	Vickers Hardness of Ceramics and Hardmetals	88	<b>3060</b>	Monoester Phthalates in Acetonitrile	40
<b>2841</b>	Semiconductor Thin Film: AlxGa1-xAs Epitaxial Layers (Al mole fraction x near 0.20)	12	<b>3074</b>	Phthalates in Methanol	41
<b>2842</b>	Semiconductor Thin Film: AlxGa1-xAs Epitaxial Layers (Al mole fraction x near 0.30)	12	<b>3077</b>	Aroclor 1242 in Transformer Oil	41
<b>2853</b>	Magnetic Moment Standard - Yttrium Iron Garnet Sphere	96	<b>3079</b>	Aroclor 1254 in Transformer Oil	41
<b>2860</b>	Phthalates in Polyvinyl Chloride	40	<b>3080</b>	Aroclor 1260 in Transformer Oil	41
<b>2885</b>	Polyethylene (Mass-Average Molar Mass [Mw] 6 280 g/mol)	62	<b>3101a</b>	Aluminum (Al) Standard Solution	14
<b>2886</b>	Polyethylene (Mass-Average Molar Mass [Mw] 87 000 g/mol)	62	<b>3102a</b>	Antimony (Sb) Standard Solution	14
<b>2887</b>	Polyethylene (Mass-Average Molar Mass [Mw] 196 400 g/mol)	62	<b>3103a</b>	Arsenic (As) Standard Solution	14, 16
<b>2890</b>	Water Saturated 1-Octanol	37	<b>3104a</b>	Barium (Ba) Standard Solution	14
<b>2891</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.02 %)	21, 58	<b>3105a</b>	Beryllium (Be) Standard Solution	14
<b>2892</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.04 %)	21, 58	<b>3106</b>	Bismuth (Bi) Standard Solution	14
<b>2893a</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.08 %)	21, 58	<b>3107</b>	Boron (B) Standard Solution	14
<b>2894</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.1 %)	21, 58	<b>3108</b>	Cadmium (Cd) Standard Solution	14
<b>2895</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.2 %)	21, 58	<b>3109a</b>	Calcium (Ca) Standard Solution	14
<b>2896</b>	Ethanol-Water Solution (Nominal Mass Fraction 0.3 %)	21, 58	<b>3110</b>	Cerium (Ce) Standard Solution	14
			<b>3111a</b>	Cesium (Cs) Standard Solution	14
			<b>3112a</b>	Chromium (Cr) Standard Solution	14
			<b>3113</b>	Cobalt (Co) Standard Solution	14
			<b>3114</b>	Copper (Cu) Standard Solution	15
			<b>3115a</b>	Dysprosium (Dy) Standard Solution	15
			<b>3116a</b>	Erbium (Er) Standard Solution	15

# Numerical Index

SRM	Description	Page #	SRM	Description	Page #
<b>3117a</b>	Europium (Eu) Standard Solution	15	<b>3233</b>	Fortified Breakfast Cereal	44
<b>3118a</b>	Gadolinium (Gd) Standard Solution	15	<b>3234</b>	Soy Flour	44
<b>3119a</b>	Gallium (Ga) Standard Solution	15	<b>3235</b>	Soy Milk	45
<b>3120a</b>	Germanium (Ge) Standard Solution	15	<b>3236</b>	Soy Protein Isolate	45
<b>3121</b>	Gold (Au) Standard Solution	15	<b>3237</b>	Soy Protein Concentrate	45
<b>3122</b>	Hafnium (Hf) Standard Solution	15	<b>3238</b>	Soy-Containing Solid Oral Dosage Form	45
<b>3123a</b>	Holmium (Ho) Standard Solution	15	<b>3246</b>	<i>Ginkgo biloba</i> (Leaves)	45
<b>3124a</b>	Indium (In) Standard Solution	15	<b>3247</b>	<i>Ginkgo biloba</i> (Extract)	45
<b>3126a</b>	Iron (Fe) Standard Solution	15	<b>3248</b>	<i>Ginkgo</i> -Containing Tablets	45
<b>3127a</b>	Lanthanum (La) Standard Solution	15	<b>3250</b>	Saw Palmetto ( <i>Serenoa repens</i> ) Fruit	45
<b>3128</b>	Lead (Pb) Standard Solution	15	<b>3251</b>	Saw Palmetto ( <i>Serenoa repens</i> ) Extract	45
<b>3129a</b>	Lithium (Li) Standard Solution	15	<b>3252</b>	Protein Drink Mix	44
<b>3130a</b>	Lutetium (Lu) Standard Solution	15	<b>3253</b>	Yerba Mate Leaves	44
<b>3131a</b>	Magnesium (Mg) Standard Solution	15	<b>3254</b>	Green Tea ( <i>Camellia sinensis</i> ) Leaves	44, 45
<b>3132</b>	Manganese (Mn) Standard Solution	15	<b>3255</b>	Green Tea ( <i>Camellia sinensis</i> ) Extract	44, 45
<b>3133</b>	Mercury (Hg) Standard Solution	15	<b>3256</b>	Green Tea-Containing Solid Oral Dosage Form	44, 45
<b>3134</b>	Molybdenum (Mo) Standard Solution	15	<b>3262</b>	St. John's Wort ( <i>Hypericum perforatum</i> L.) Aerial Parts	40, 45
<b>3135a</b>	Neodymium (Nd) Standard Solution	15	<b>3274</b>	Botanical Oils Containing Omega-3 and Omega-6 Fatty Acids	45
<b>3136</b>	Nickel (Ni) Standard Solution	15	<b>3275</b>	Omega-3 and Omega-6 Fatty Acids in Fish Oil	45
<b>3137</b>	Niobium (Nb) Standard Solution	15	<b>3278</b>	Tocopherols in Edible Oils	44
<b>3138</b>	Palladium (Pd) Standard Solution	15	<b>3279</b>	Chromium Dietary Supplement	45
<b>3139a</b>	Phosphorus (P) Standard Solution	15	<b>3280</b>	Multivitamin/Multielement Tablets	45
<b>3140</b>	Platinum (Pt) Standard Solution	15	<b>3281</b>	Cranberry (Fruit)	44, 45
<b>3141a</b>	Potassium (K) Standard Solution	15	<b>3282</b>	Low-Calorie Cranberry Juice Cocktail	44, 45
<b>3142a</b>	Praseodymium (Pr) Standard Solution	15	<b>3283</b>	Cranberry Extract	45
<b>3143</b>	Rhenium (Re) Standard Solution	15	<b>3284</b>	Cranberry-Containing Solid Oral Dosage Form	45
<b>3144</b>	Rhodium (Rh) Standard Solution	15	<b>3285</b>	Mixed-Berry Containing Solid Oral Dosage Form	45
<b>3145a</b>	Rubidium (Rb) Standard Solution	15	<b>3287</b>	Blueberry (Fruit)	44
<b>3147a</b>	Samarium (Sm) Standard Solution	15	<b>3290</b>	Dry Cat Food	44
<b>3148a</b>	Scandium (Sc) Standard Solution	15	<b>3291</b>	Bilberry Extract	45
<b>3149</b>	Selenium (Se) Standard Solution	15	<b>3299</b>	Ground Turmeric ( <i>Curcuma longa</i> L.) Rhizome	45
<b>3150</b>	Silicon (Si) Standard Solution	15	<b>3300</b>	Curcumin Extract of Turmeric ( <i>Curcuma longa</i> L.) Rhizome	45
<b>3151</b>	Silver (Ag) Standard Solution	15	<b>3451</b>	Low Temperature Seebeck Coefficient Standard	65
<b>3152a</b>	Sodium (Na) Standard Solution	15	<b>3530</b>	Iodized Table Salt (Iodide)	44, 45
<b>3153a</b>	Strontium (Sr) Standard Solution	15	<b>3532</b>	Calcium-Containing Solid Oral Dosage Form	45
<b>3154</b>	Sulfur (S) Standard Solution	15	<b>3600</b>	Absolute Intensity Calibration Standard for Small-Angle X-Ray Scattering	82
<b>3155</b>	Tantalum (Ta) Standard Solution	15	<b>3667</b>	Creatinine in Frozen Human Urine	20, 21
<b>3156</b>	Tellurium (Te) Standard Solution	15	<b>3668</b>	Mercury, Perchlorate, and Iodide in Frozen Human Urine	20, 21
<b>3157a</b>	Terbium (Tb) Standard Solution	15	<b>3669</b>	Arsenic Species in Frozen Human Urine (Elevated Levels)	20, 21
<b>3158</b>	Thallium (Tl) Standard Solution	15	<b>3671</b>	Nicotine Metabolites in Human Urine (Frozen)	20, 22
<b>3160a</b>	Thulium (Tm) Standard Solution	15	<b>3672</b>	Organic Contaminants in Smokers' Urine (Frozen)	20, 22, 40
<b>3161a</b>	Tin (Sn) Standard Solution	15	<b>3673</b>	Organic Contaminants in Non-Smokers' Urine (Frozen)	20, 22, 40
<b>3162a</b>	Titanium (Ti) Standard Solution	15	<b>3949</b>	Folate Vitamers in Frozen Human Serum	20, 21
<b>3163</b>	Tungsten (W) Standard Solution	15	<b>3950</b>	Vitamin B <sub>6</sub> in Frozen Human Serum	20, 21
<b>3164</b>	Uranium (U) Standard Solution (Radioactive)	15	<b>4222d</b>	Carbon-14-n-hexadecane Radioactivity Standard	70
<b>3165</b>	Vanadium (V) Standard Solution	15	<b>4226d</b>	Nickel-63 Radioactivity Standard	70
<b>3166a</b>	Ytterbium (Yb) Standard Solution	15	<b>4233f</b>	Cesium-137 Radioactivity Standard Solution	70
<b>3167a</b>	Yttrium (Y) Standard Solution	15	<b>4239</b>	Strontium-90 Radioactivity Standard Solution	70
<b>3168a</b>	Zinc (Zn) Standard Solution	15	<b>4251d</b>	Barium-133 Radioactivity Standard Solution	70
<b>3169</b>	Zirconium (Zr) Standard Solution	15	<b>4274</b>	Holmium-166m Gamma-ray Emission Rate Standard Solution	70
<b>3177</b>	Mercuric Chloride Standard Solution	15	<b>4288b</b>	Technetium-99 Radioactivity Standard	70
<b>3180</b>	Iodide Anion (I <sup>-</sup> ) Standard Solution	16	<b>4320b</b>	Curium-244 Radioactivity Standard	70
<b>3181</b>	Sulfate Anion (SO <sub>4</sub> <sup>2-</sup> ) Standard Solution	16	<b>4321d</b>	Natural Uranium Radioactivity Standard	70
<b>3182</b>	Chloride Anion (Cl <sup>-</sup> ) Standard Solution	16	<b>4322d</b>	Americium-241 Radioactivity Standard	70
<b>3183</b>	Fluoride Anion (F <sup>-</sup> ) Standard Solution	16	<b>4323c</b>	Plutonium-238 Radioactivity Standard	70
<b>3184</b>	Bromide Anion (Br <sup>-</sup> ) Standard Solution	16	<b>4324b</b>	Uranium-232 Radioactivity Standard Solution	70
<b>3185</b>	Nitrate Anion (NO <sub>3</sub> <sup>-</sup> ) Standard Solution	16			
<b>3186</b>	Phosphate Anion (PO <sub>4</sub> <sup>3-</sup> ) Standard Solution	16			
<b>3222</b>	Cigarette Tobacco Filler	45			
<b>3230</b>	Iodine-129 Isotopic Standard (Low Level)	16			
<b>3231</b>	Iodine-129 Isotopic Standard (High Level)	16			
<b>3232</b>	Kelp Powder ( <i>Thallus laminariae</i> )	45			

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>	<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>4326a</b>	Polonium-209 Radioactivity Standard	70	<b>8375</b>	Microbial Genomic DNA Standards for Sequencing Performance Assessment (MG-001, MG-002, MG-003, MG-004)	23, 58
<b>4328c</b>	Thorium-229 Radioactivity Standard Solution	70	<b>8391</b>	Human DNA for Whole-Genome Variant Assessment (Son of Eastern European Ashkenazi Jewish Ancestry) (HG-002)	23
<b>4329a</b>	Curium-243 Radioactivity Standard Solution	70	<b>8392</b>	Human DNA for Whole-Genome Variant Assessment (Family Trio of Eastern European Ashkenazi Jewish Ancestry) (HG-002, HG-003, HG-004)	23
<b>4330c</b>	Plutonium-239 Radioactivity Standard	70	<b>8393</b>	Human DNA for Whole-Genome Variant Assessment (Son of Chinese Ancestry) (HG-005)	23
<b>4332e</b>	Americium-243 Radioactivity Standard	70	<b>8398</b>	Human DNA for Whole-Genome Variant Assessment (Daughter of Utah/European Ancestry) (HG-001)	23
<b>4334j</b>	Plutonium-242 Radioactivity Standard Solution	70	<b>8420</b>	Electrolytic Iron	65, 74
<b>4337</b>	Lead-210 Radioactivity Standard Solution	70	<b>8441a</b>	Wheat Hardness (kernel form)	45
<b>4338a</b>	Plutonium-240 Radioactivity Standard Solution	70	<b>8445</b>	Spray-Dried Whole Egg for Allergen Detection	44
<b>4339b</b>	Radium-228 Radioactivity Solution	70	<b>8446</b>	Perfluorinated Carboxylic Acids and Perfluorooctane Sulfonamide in Methanol	40, 41
<b>4340b</b>	Plutonium-241 Radioactivity Standard	70	<b>8447</b>	Perfluorinated Sulfonic Acids in Methanol	40, 41
<b>4341a</b>	Neptunium-237 Radioactivity Standard	70	<b>8455</b>	Pyrite Ore Bioleaching Substrate	48
<b>4342a</b>	Thorium-230 Radioactivity Standard	70	<b>8480</b>	Secondary Ferrite Number Standard - Low Range	95
<b>4350B</b>	River Sediment Environmental Radioactivity Standard	72	<b>8481</b>	Secondary Ferrite Number Standard - High Range	95
<b>4351</b>	Human Lung Environmental Radioactivity Standard	72	<b>8495</b>	Northern Softwood	37, 95
<b>4352</b>	Human Liver Environmental Radioactivity Standard	72	<b>8496</b>	Eucalyptus Hardwood	37, 95
<b>4353A</b>	Rocky Flats Soil Number 2	72	<b>8505</b>	Vanadium in Crude Oil	36
<b>4354</b>	Lake Sediment Environmental Radioactivity Standard	72	<b>8506a</b>	Moisture in Transformer Oil	37
<b>4355</b>	Peruvian Soil Powder	72	<b>8509</b>	Moisture in Methanol	37
<b>4356</b>	Ashed Bone Environmental Radioactivity Standard	72	<b>8529</b>	IAEA-S-3 (Sulfur Isotopes in Silver Sulfide)	17
<b>4357</b>	Ocean Sediment Powder	72	<b>8535a</b>	VSMOW2 Vienna Standard Mean Ocean Water (Hydrogen and Oxygen Isotopes in Water)	17
<b>4358</b>	Ocean Shellfish Radionuclide Standard	72	<b>8536</b>	GISP-Water	17
<b>4359</b>	Seaweed Radionuclide Standard	72	<b>8537</b>	SLAP-Water Light Stable Isotopic Standard	17
<b>4361c</b>	Hydrogen-3 Radioactivity Standard	70	<b>8539</b>	NBS22 Oil (Carbon and Hydrogen Isotopes in Oil)	17
<b>4370d</b>	Europium-152 Radioactivity Standard Solution	70	<b>8540</b>	IAEA-CH-7 (Carbon and Hydrogen Isotopes in Polyethylene Foil)	17
<b>4401L</b>	Iodine-131 Radioactivity Standard	71	<b>8541</b>	USGS24 Graphite (Carbon Isotopes in Graphite)	17
<b>4404L</b>	Thallium-201 Radioactivity Standard	71	<b>8542</b>	IAEA-CH-6 Sucrose (Carbon Isotopes in Sucrose)	17
<b>4407L</b>	Iodine-125 Radioactivity Standard	71	<b>8544</b>	NBS 19 Limestone (Carbon and Oxygen Isotopes in Carbonate)	17
<b>4410H</b>	Technetium-99m Radioactivity Standard	71	<b>8545</b>	LSVEC (Carbon, Oxygen, and Lithium Isotopes in Lithium Carbonate)	17
<b>4412L</b>	Molybdenum-99 Radioactivity Standard	71	<b>8546</b>	NBS28 (Silicon and Oxygen Isotopes in Silica Sand)	17
<b>4415L</b>	Xenon-133 Radioactivity Standard	71	<b>8547</b>	IAEA-N-1 (Nitrogen Isotopes in Ammonium Sulfate)	17
<b>4416L</b>	Gallium-67 Radioactivity Standard	71	<b>8548</b>	IAEA-N-2 (Nitrogen Isotopes in Ammonium Sulfate)	17
<b>4417L</b>	Indium-111 Radioactivity Standard	71	<b>8550</b>	USG25 (Nitrogen Isotopes in Ammonium Sulfate)	17
<b>4427L</b>	Yttrium-90 Radioactivity Standard	71	<b>8551</b>	USGS26 (Nitrogen Isotopes in Ammonium Sulfate)	17
<b>4915f</b>	Cobalt-60 Radioactivity Standard Solution	70	<b>8552</b>	NSVEC (Nitrogen Isotopes in Gaseous Nitrogen)	17
<b>4919I</b>	Strontium-90 Radioactivity Standard	70	<b>8553</b>	IAEA-S-4 (Soufre De Lacq) (Sulfur Isotopes in Elemental Sulfur)	17
<b>4926e</b>	Hydrogen-3 Radioactivity Standard	70	<b>8554</b>	IAEA-S-1 (Sulfur Isotopes in Silver Sulfide)	17
<b>4927g</b>	Hydrogen-3 Radioactivity Standard	70	<b>8555</b>	IAEA-S-2 (Sulfur Isotopes in Silver Sulfide)	17
<b>4929f</b>	Iron-55 Radioactivity Standard	70	<b>8556</b>	NBS123 (Sulfur Isotopes in Sphalerite)	17
<b>4943</b>	Chlorine-36 Radioactivity Standard	70	<b>8557</b>	NBS127 (Sulfur and Oxygen Isotopes in Barium Sulfate)	17
<b>4949d</b>	Iodine-129 Radioactivity Standard Solution	70	<b>8558</b>	USGS32 (Nitrogen and Oxygen Isotopes in Nitrate)	17
<b>4965a</b>	Radium-226 Radioactivity Standard Solution	70	<b>8562</b>	CO <sub>2</sub> -Heavy, Paleomarine Origin (Carbon Dioxide)	17
<b>4966a</b>	Radium-226 Radioactivity Standard	70	<b>8563</b>	CO <sub>2</sub> -Light, Petrochemical Origin (Carbon Dioxide)	17
<b>4967a</b>	Radium-226 Radioactivity Standard Solution	70	<b>8564</b>	CO <sub>2</sub> -Biogenic, Modern Biomass Origin (Carbon Dioxide)	17
<b>4969</b>	Radium-226 Radioactivity Standard	70	<b>8568</b>	USGS34 (Nitrogen and Oxygen Isotopes in Nitrate)	17
<b>4990C</b>	Oxalic Acid	72	<b>8569</b>	USGS35 (Nitrogen and Oxygen Isotopes in Nitrate)	17
<b>8010</b>	Sand for Sand Sieve Analysis	84	<b>8574</b>	L-glutamic Acid USGS41 (Heavy Carbon and Nitrogen Isotopes in L-glutamic Acid)	17
<b>8011</b>	Gold Nanoparticles, Nominal 10 nm Diameter	22, 84, 92	<b>8599</b>	Henderson Molybdenite	16
<b>8012</b>	Gold Nanoparticles, Nominal 30 nm Diameter	22, 84, 92			
<b>8013</b>	Gold Nanoparticles, Nominal 60 nm Diameter	22, 84, 92			
<b>8017</b>	Polyvinylpyrrolidone Coated Silver Nanoparticles (Nominal Diameter 75 nm)	92			
<b>8027</b>	Silicon Nanoparticles (Nominal Diameter 2 nm)	92			
<b>8037</b>	Krill Oil	45			
<b>8040</b>	Sodium Oxalate (Na <sub>2</sub> C <sub>2</sub> O <sub>4</sub> ) Reductometric Standard	14			
<b>8281</b>	Single-Wall Carbon Nanotubes (Dispersed, Three Length-Resolved Populations)	92			
<b>8321</b>	Peptide Mixture of Proteomics	20			
<b>8323</b>	Yeast Protein Extract	20			
<b>8366</b>	EGFR and MET Gene Copy Number Standards for Cancer Measurements	23			

# Numerical Index

<b>SRM</b>	<b>Description</b>	<b>Page #</b>
<b>8610</b>	Mercury Isotopes in UM-Almaden Mono-Elemental Secondary Standard	26
<b>8631b</b>	Medium Test Dust (MTD)	85
<b>8632</b>	Ultra Fine Test Dust (UFTD)	85
<b>8634</b>	Ethylene Tetrafluoroethylene for Particle Size Distribution and Morphology	84
<b>8642a</b>	FDA Saxitoxin Dihydrochloride Solution	20, 44
<b>8671</b>	NISTmAb, Humanized IgG1k Monoclonal Antibody	23
<b>8704</b>	Buffalo River Sediment	26, 27, 49
<b>8785</b>	Air Particulate Matter on Filter Media	22, 26, 27
<b>8786</b>	Filter Blank for RM 8785	22, 26, 27
<b>8820</b>	Scanning Electron Microscope Scale Calibration Artifact	76, 77
<b>8850</b>	Zeolite Y	27
<b>8851</b>	Zeolite A	27
<b>8852</b>	Ammonium ZSM-5 Zeolite	27
<b>8983</b>	Silicon Nitride	52
<b>8988</b>	Titanium Dioxide Powder - Particle Size Distribution	84



